


# Fixing

## Mounting full-extension runner on the cabinet side

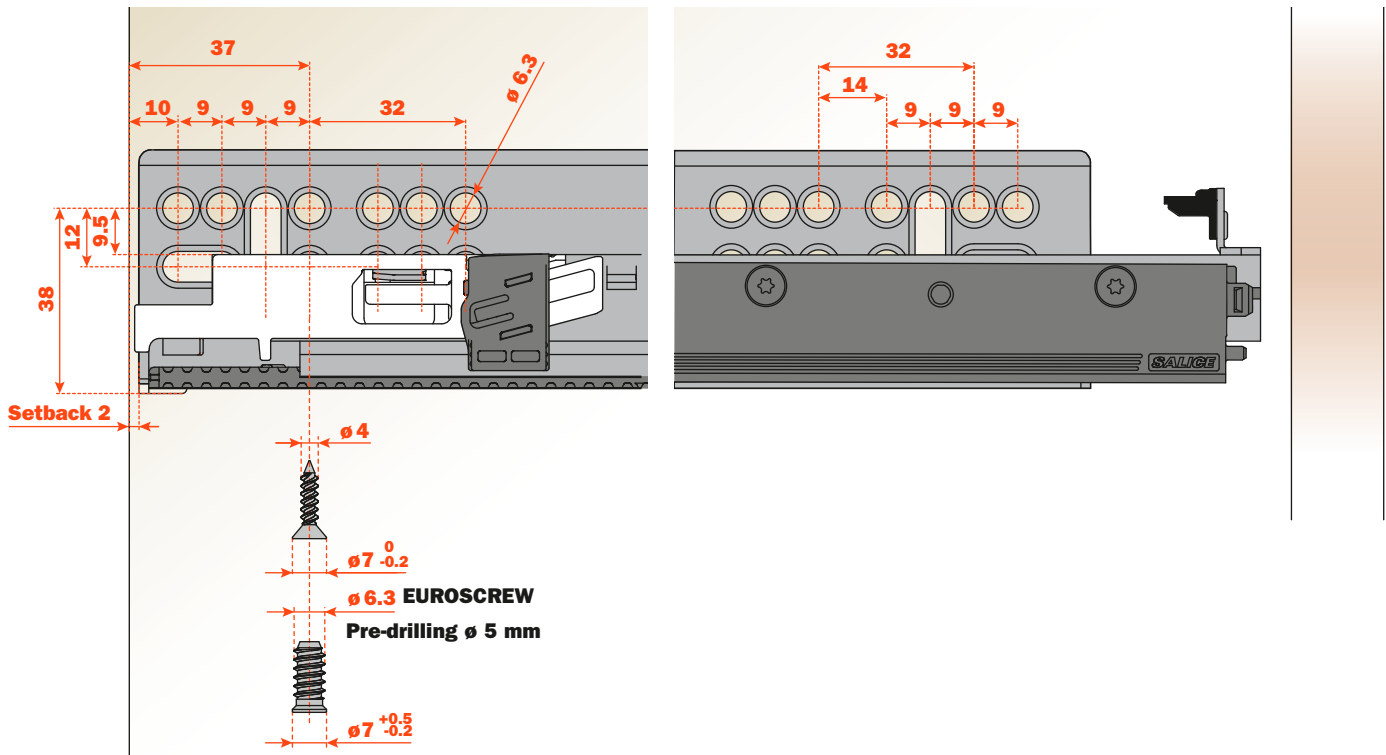


**Screws**, see page 37


If runners are mounted before the assembly of the cabinet, we recommend that the inset position of the runner be increased from 38 to 39 mm to accommodate the manufacturing tolerances in the cabinet and the runner.

The oval slots on the runners enable a depth adjustment of  $\pm 4.5$  mm and a height adjustment of  $\pm 6$  mm to be made.

These adjustments are in addition to those incorporated in the fixing clips and in the runner (**Adjustments**, see page 17).

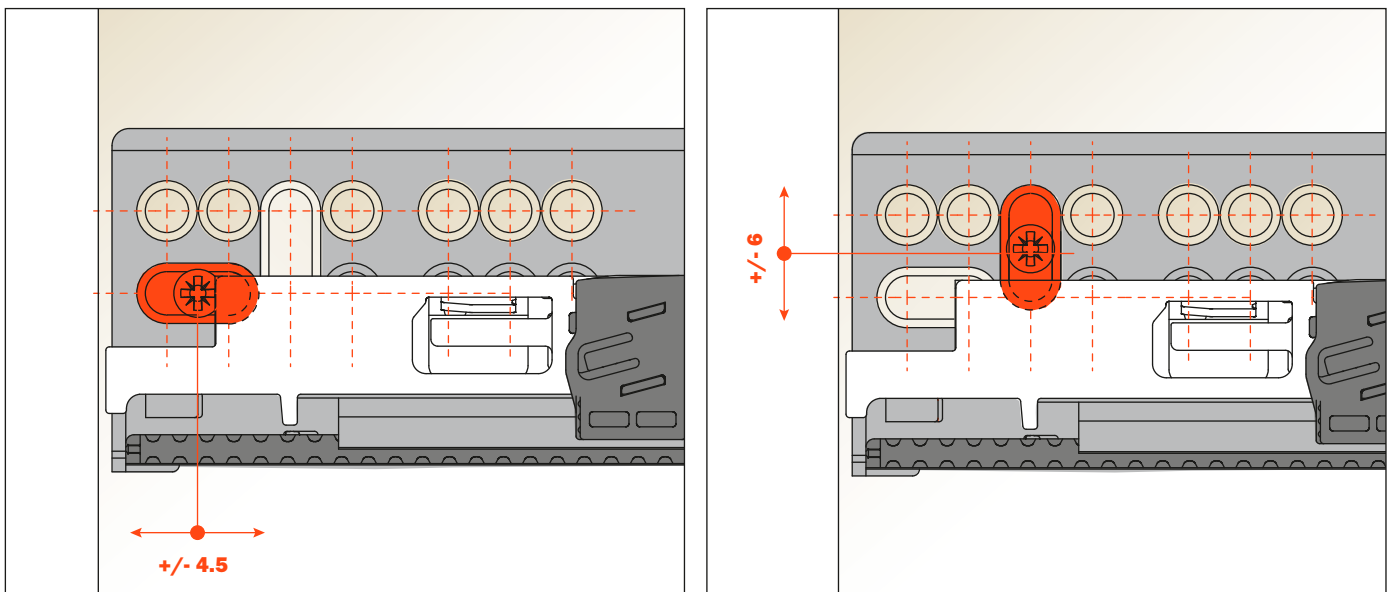

### Drilling positions for runner on cabinet side

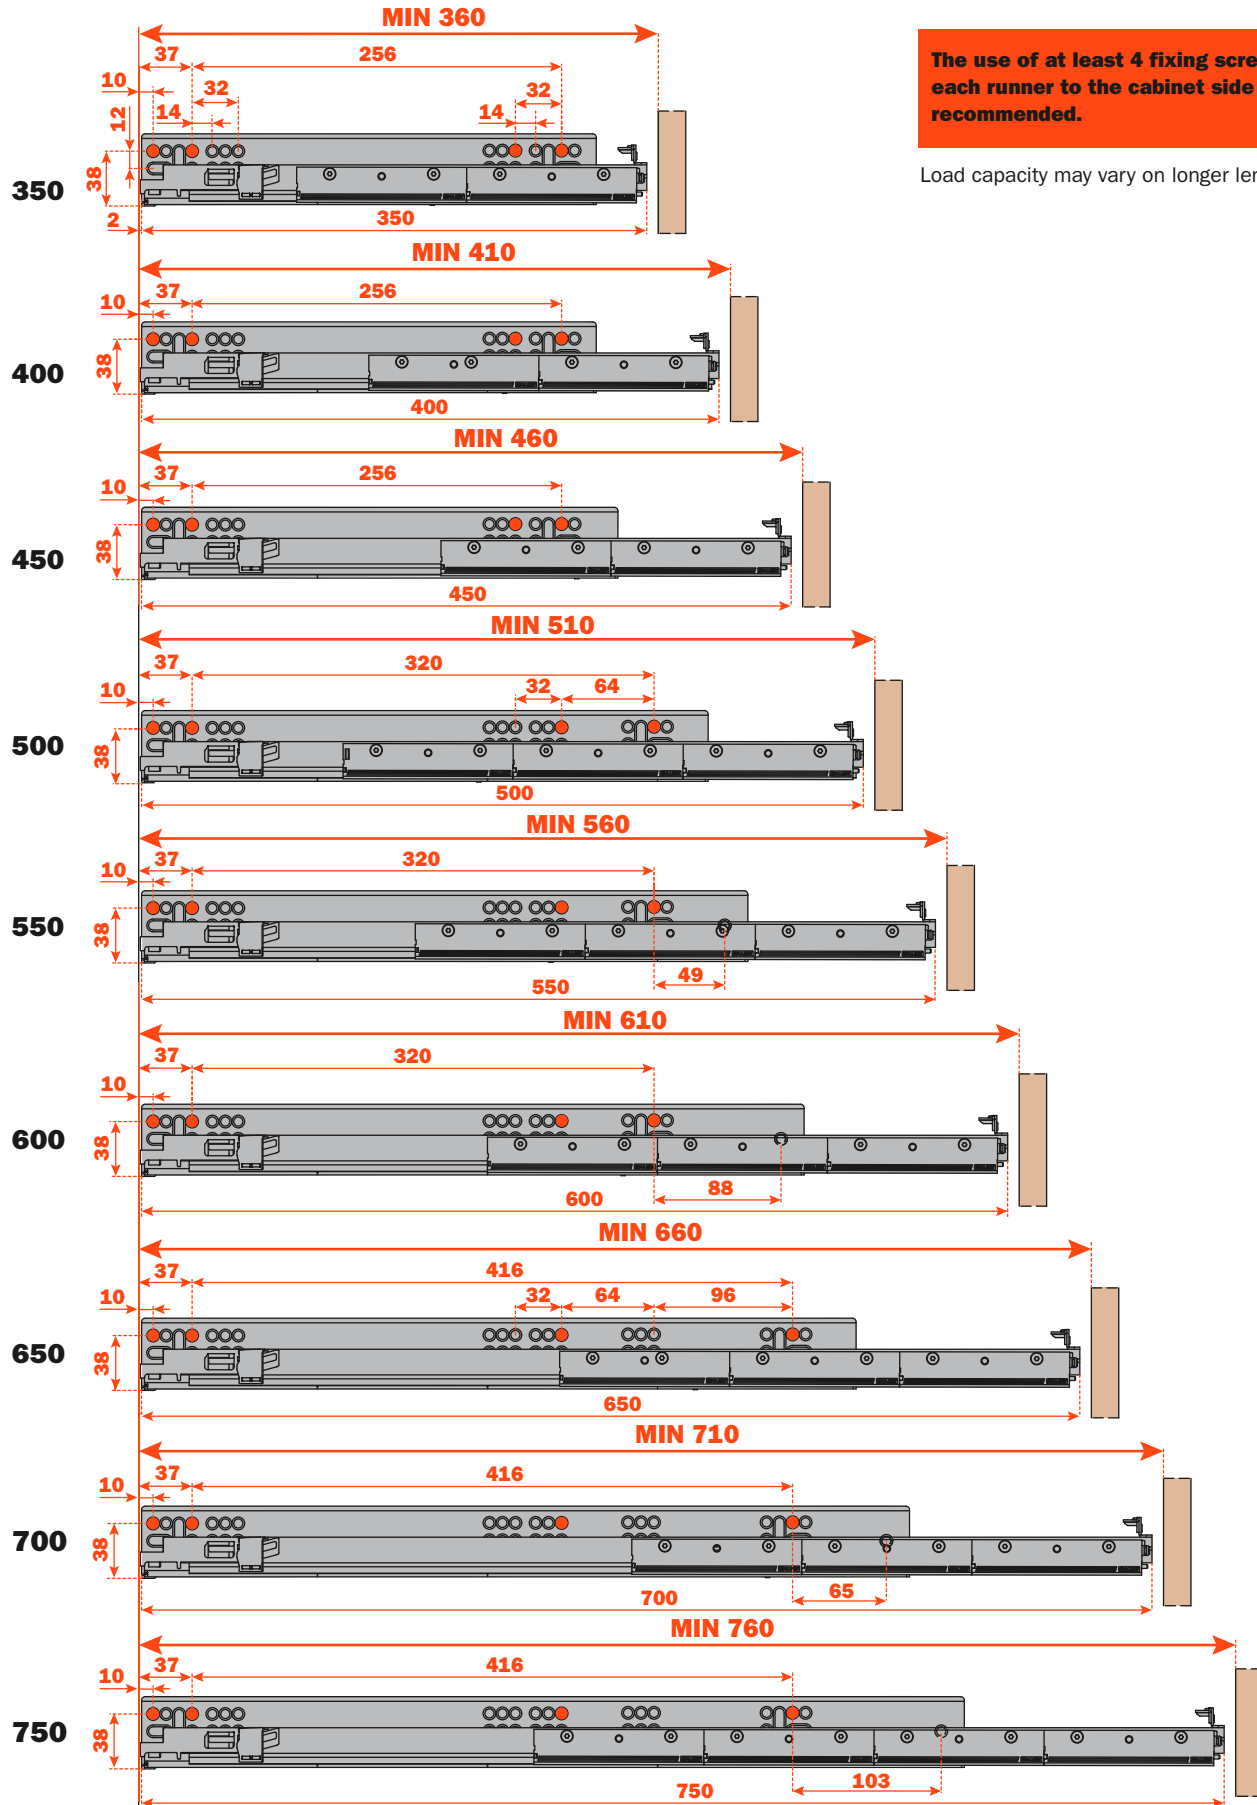


**The use of at least 4 fixing screws for each runner to the cabinet side is highly recommended.**

Load capacity may vary on longer lengths.

# Drawer setting



## Abbreviations

- SP** = Drawer side thickness
- LC** = Drawer depth
- PM** = Cabinet depth
- X** = Cabinet internal width
- LN** = Nominal runner length

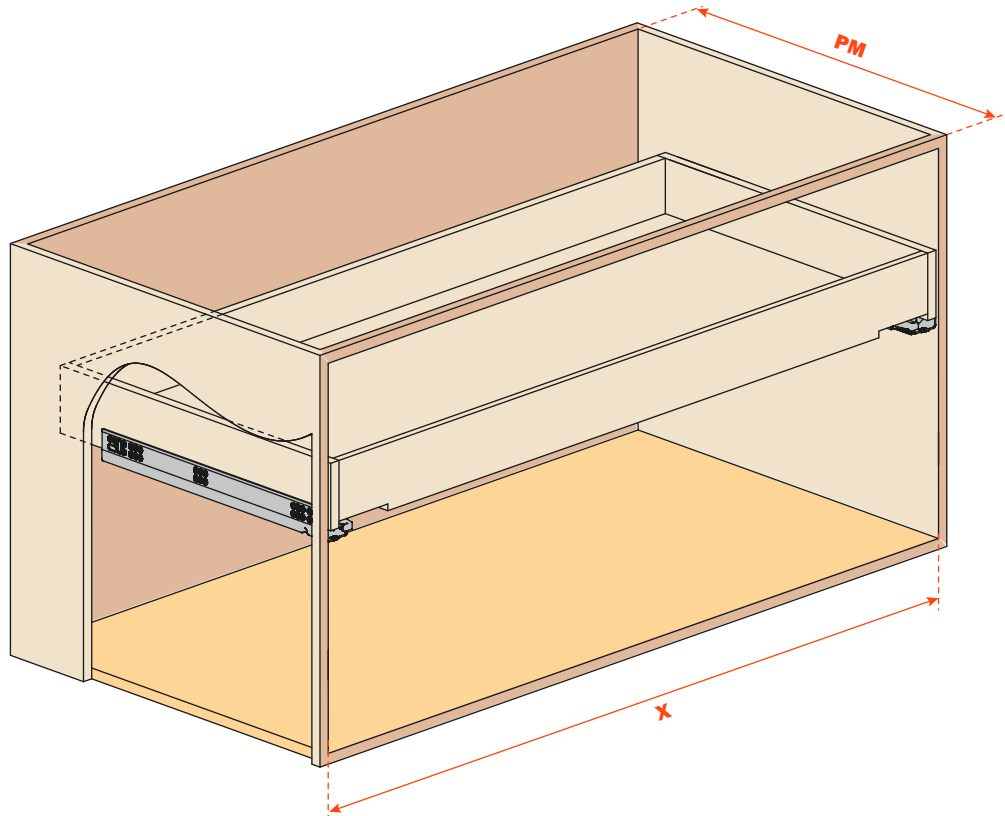

The internal width of the drawer is 42 mm to 43.5 mm less than the internal width of the cabinet


The external drawer depth is 10 mm less than the runner length

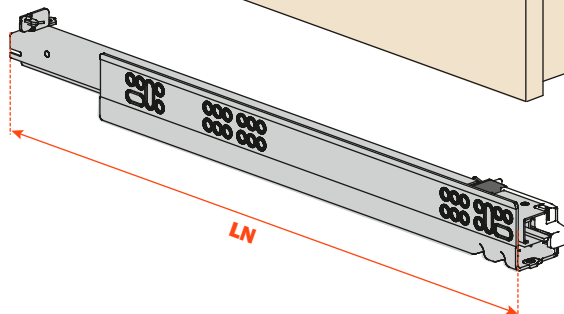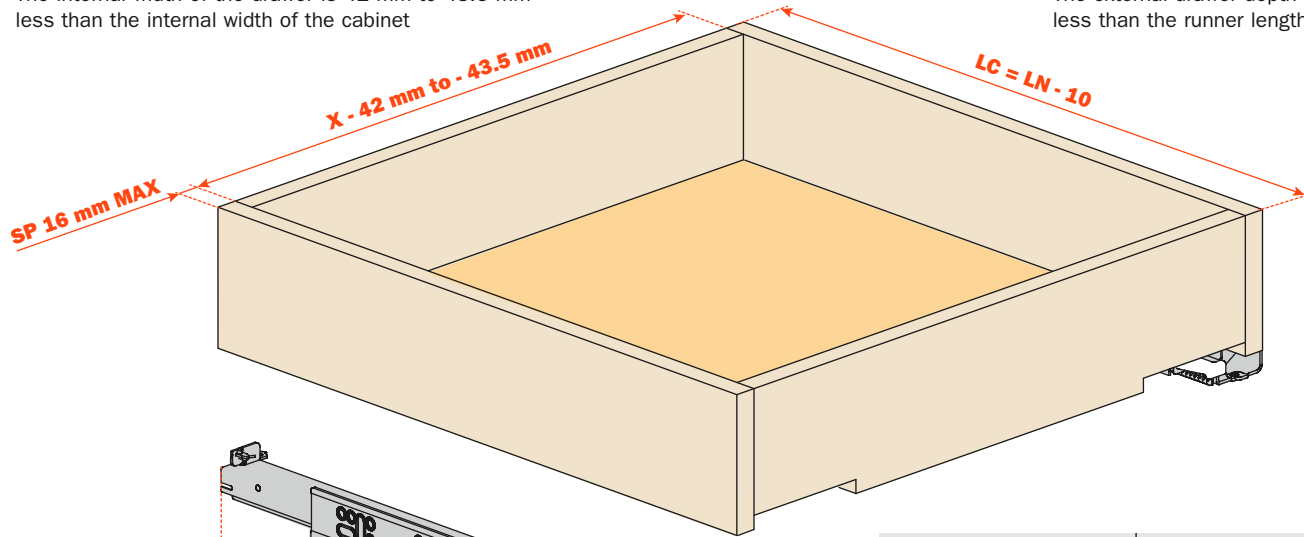


Nominal runner length mm	External drawer depth mm
350	340
400	390
450	440
500	490
550	540
600	590
650	640
700	690
750	740

## Drawer drilling


### 3-SIDED drawer

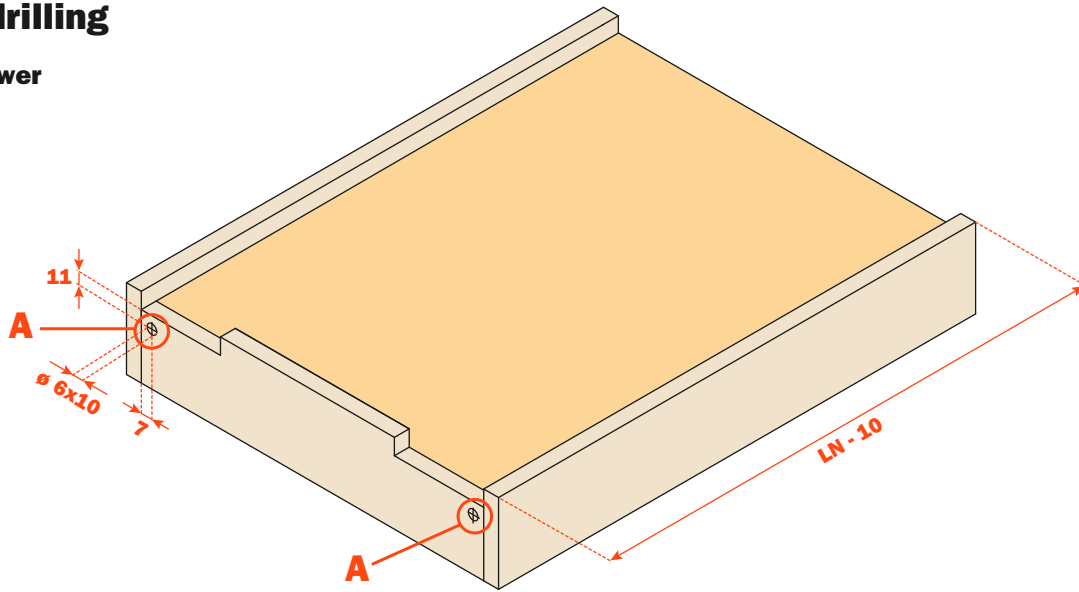


### 4-SIDED drawer

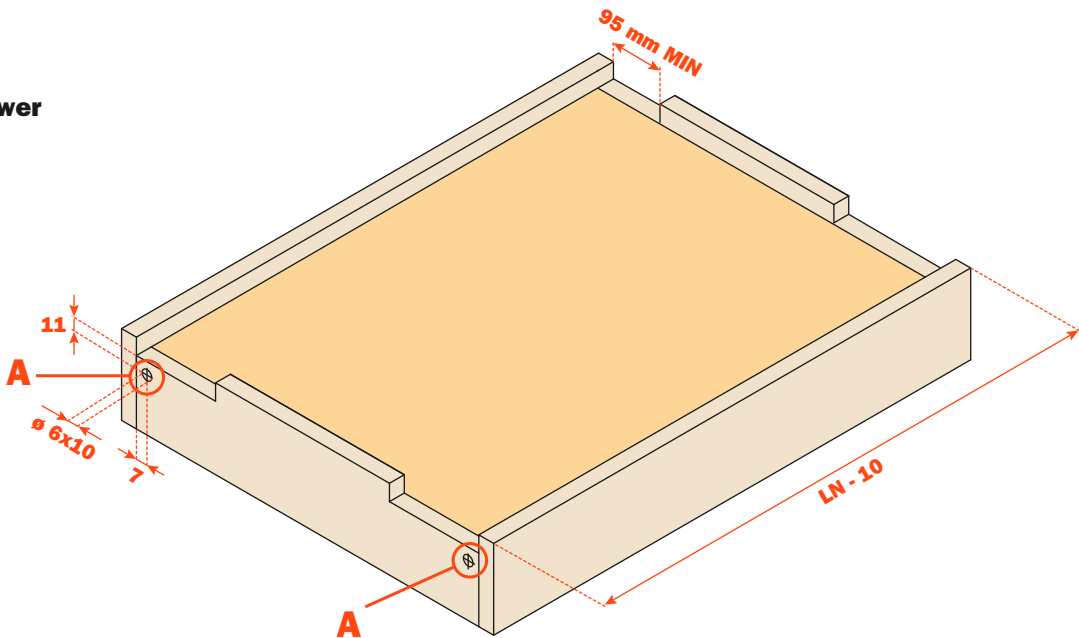


### REAR HOOK

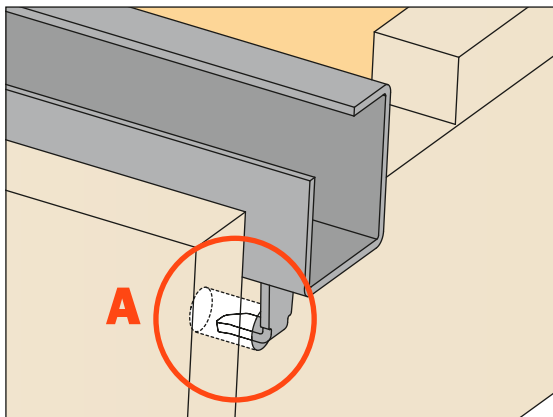

### REAR NOTCH with Smove and Push runners

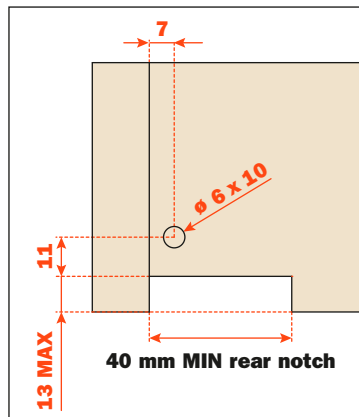


### REAR NOTCH with Push Synchronizer and tilt adjustment lever

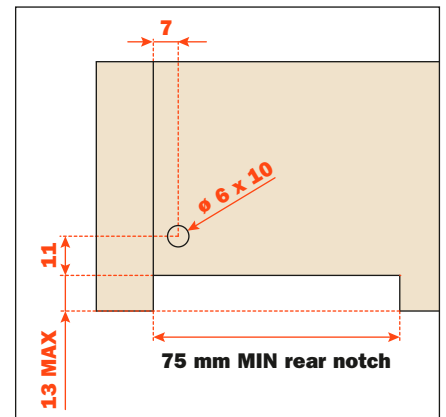

Use **SGD704UGXA drilling template** for rear hook, see page 35.

**F70 Push Synchronizer**, see page 32.  
**AGLRXX3F Tilt adjustment lever**, see page 37.

## Part number composition

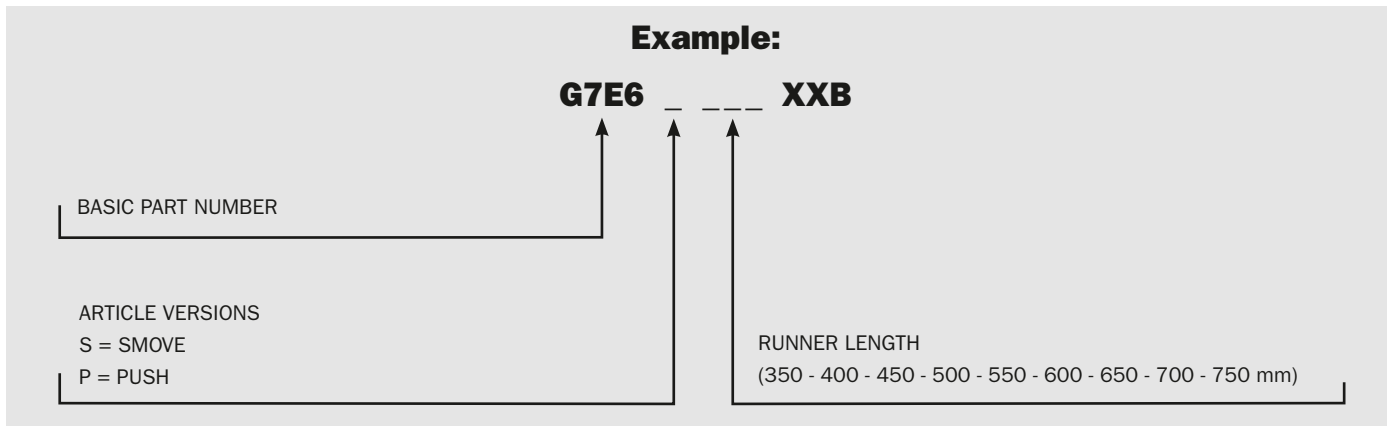

## Industrial packaging

<b>SMOVE</b>	<b>LENGTH</b>	<b>BOX Right runners</b>	<b>BOX Left runners</b>	<b>PALLET Right runners</b>	<b>PALLET Left runners</b>
<b>G7E6S350XXB</b>	350 mm	6 pcs.	6 pcs.	384 pcs.	384 pcs.
<b>G7E6S400XXB</b>	400 mm	6 pcs.	6 pcs.	384 pcs.	384 pcs.
<b>G7E6S450XXB</b>	450 mm	6 pcs.	6 pcs.	384 pcs.	384 pcs.
<b>G7E6S500XXB</b>	500 mm	6 pcs.	6 pcs.	384 pcs.	384 pcs.
<b>G7E6S550XXB</b>	550 mm	6 pcs.	6 pcs.	384 pcs.	384 pcs.
<b>G7E6S600XXB</b>	600 mm	4 pcs.	4 pcs.	256 pcs.	256 pcs.
<b>G7E6S650XXB</b>	650 mm	4 pcs.	4 pcs.	256 pcs.	256 pcs.
<b>G7E6S700XXB</b>	700 mm	4 pcs.	4 pcs.	256 pcs.	256 pcs.
<b>G7E6S750XXB</b>	750 mm	4 pcs.	4 pcs.	256 pcs.	256 pcs.

<b>PUSH</b>	<b>LENGTH</b>	<b>BOX Right runners</b>	<b>BOX Left runners</b>	<b>PALLET Right runners</b>	<b>PALLET Left runners</b>
<b>G7E6P350XXB</b>	350 mm	6 pcs.	6 pcs.	384 pcs.	384 pcs.
<b>G7E6P400XXB</b>	400 mm	6 pcs.	6 pcs.	384 pcs.	384 pcs.
<b>G7E6P450XXB</b>	450 mm	6 pcs.	6 pcs.	384 pcs.	384 pcs.
<b>G7E6P500XXB</b>	500 mm	6 pcs.	6 pcs.	384 pcs.	384 pcs.
<b>G7E6P550XXB</b>	550 mm	6 pcs.	6 pcs.	384 pcs.	384 pcs.
<b>G7E6P600XXB</b>	600 mm	4 pcs.	4 pcs.	256 pcs.	256 pcs.
<b>G7E6P650XXB</b>	650 mm	4 pcs.	4 pcs.	256 pcs.	256 pcs.
<b>G7E6P700XXB</b>	700 mm	4 pcs.	4 pcs.	256 pcs.	256 pcs.
<b>G7E6P750XXB</b>	750 mm	4 pcs.	4 pcs.	256 pcs.	256 pcs.

<b>CLIP</b>	<b>BOX Right clips</b>	<b>BOX Left clips</b>	<b>PALLET Right clips</b>	<b>PALLET Left clips</b>
<b>AFCGXX3B</b>	100 pcs.	100 pcs.	2400 pcs.	2400 pcs.

<b>TILT ADJUSTMENT LEVER</b>	<b>BOX</b>	<b>PALLET</b>
<b>AGLRXX3F</b>	10 boxes 1 box = 12 right pcs. and 12 left pcs.	2400 right pcs. and 2400 left pcs.