

Accessories

Push Synchronizer bar

The synchronization system for Push-to-Open **Progressa⁺** slides has been developed to ensure that wider drawers can be opened with minimum effort, regardless of where pressure is applied. The system links the two runners, which then become a single element; applying pressure on any part of the drawer front (even at the extremities), is sufficient for the Push devices to release and consequently for the drawer to open.

The synchronization can be used with any drawer width; its functionality is at its best with drawers wider than 762 mm (30").


PRODUCT FEATURES:

- frameless or blocked out face frame applications
- smooth and progressive running action
- slide load capacity remains unchanged
- available on any **Progressa⁺** drawer length
- minimum opening (X) = 280 mm (11")
- maximum opening (X) = 1305 mm (51 - 3/8")
- bar length = 1150 cut to size



Technical information - Formula for cutting the bar to length



The assembly of the synchronizer requires a minimum 76.2 mm (3") groove in the rear of the drawer.

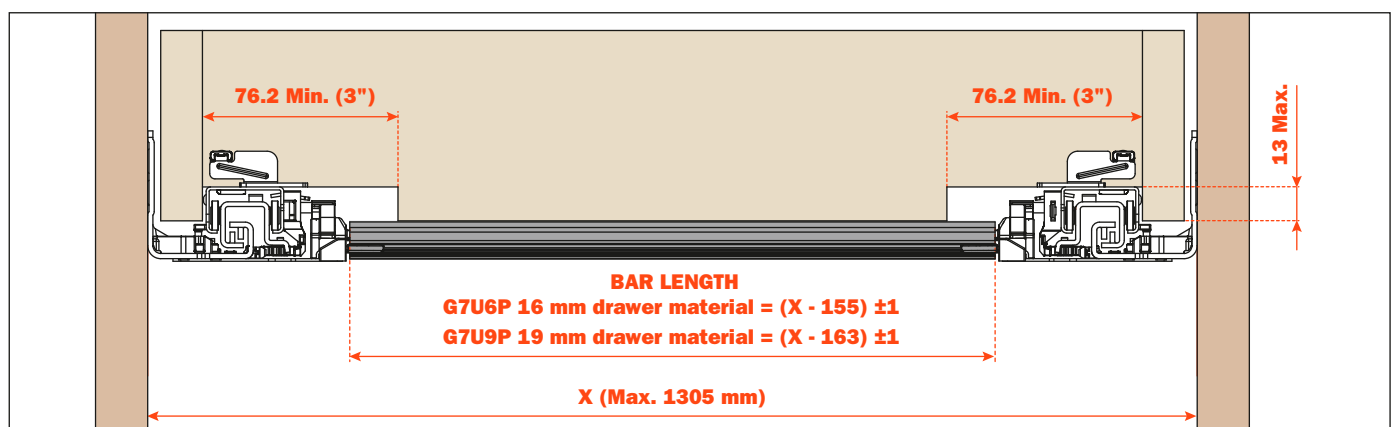


X = Internal width of the cabinet

Assembly instructions


Slide the carrier plates into position on the runners in the direction indicated by the arrows

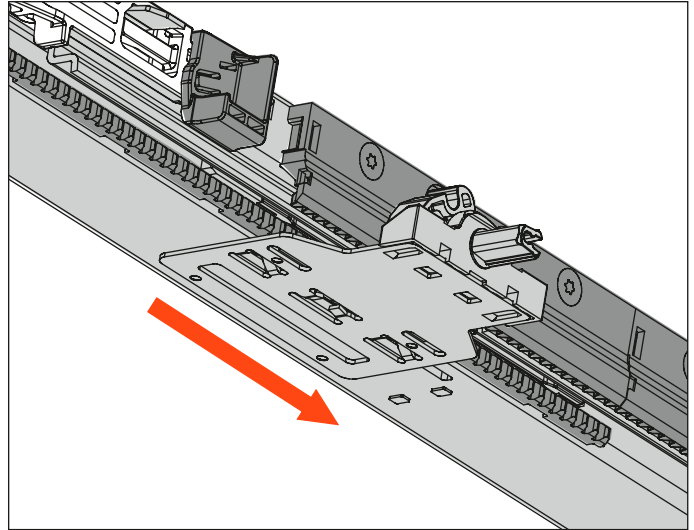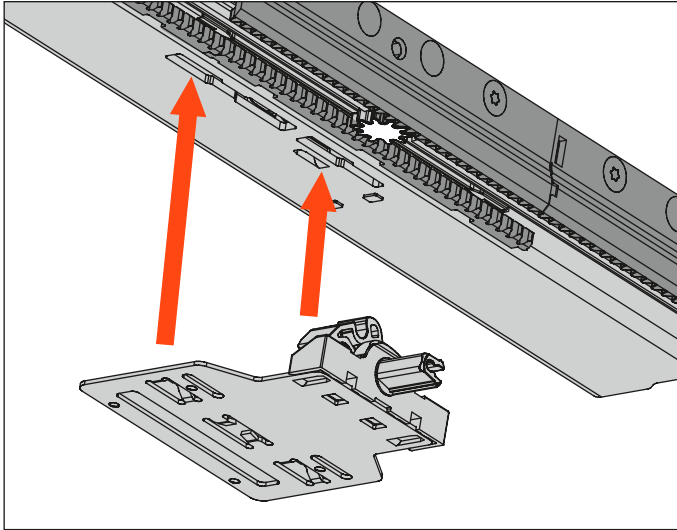

Fitting the driver pins to the runners

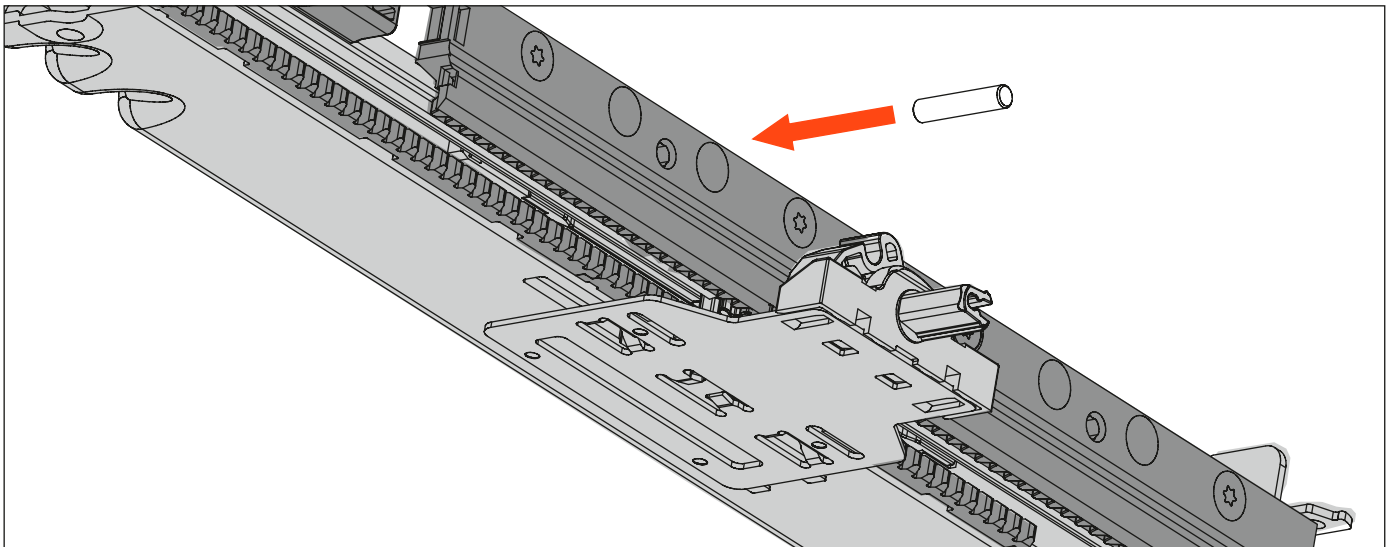


Cut the stabilizer bar to length

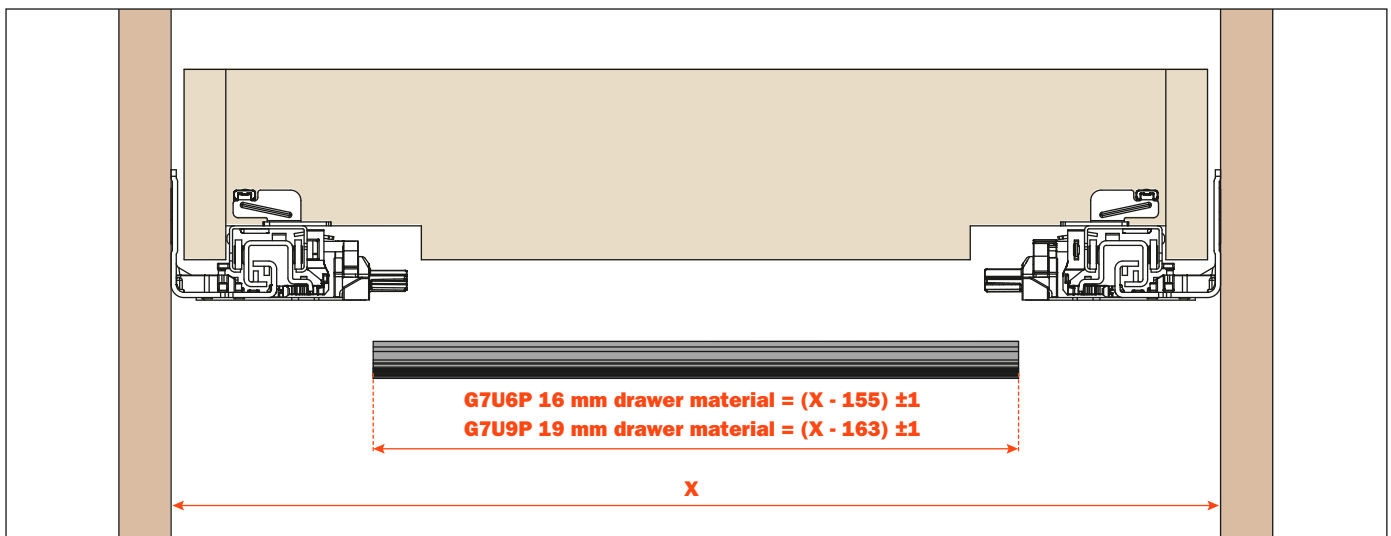


Assembly instructions

Fix the bar to the plates and insert the drawer

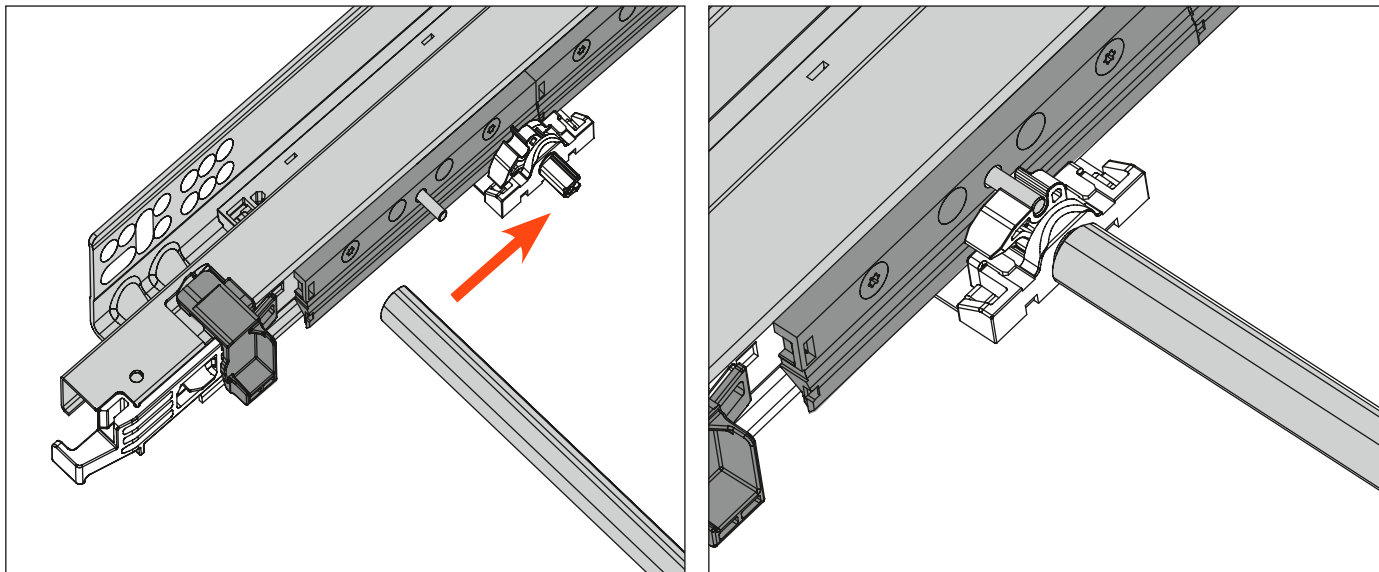

Applying pressure on any part of the drawer front is sufficient for the drawer to open

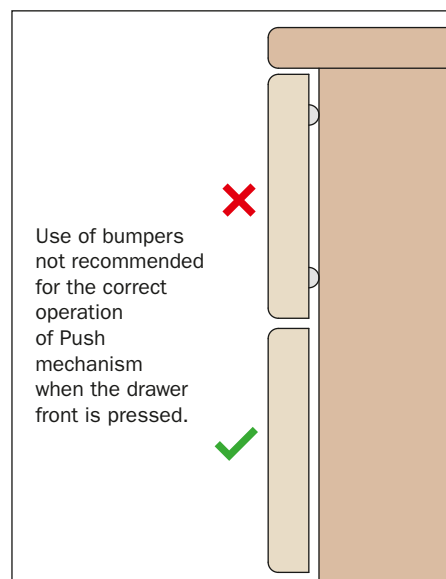

Packaging

SYNCHRONIZER - SINGLE KIT PACKAGING

APKF7X51150

PACKAGING

1 box = 20 single kits



1 KIT CONTAINS:

- 1 synchronizer bar
- 2 driver pins
- 1 right carrier plate and 1 left carrier plate



Metal sockets - For all Progressa and Progressa+ slides

Standard metal socket

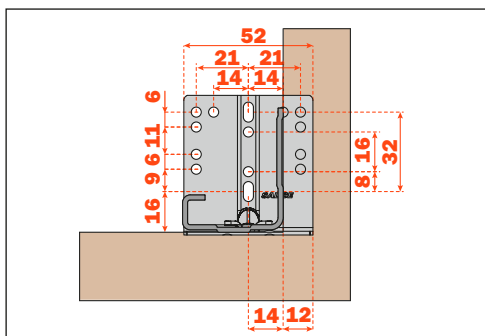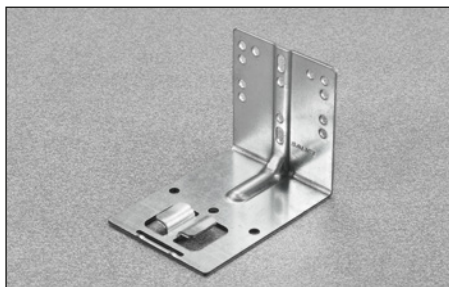


AGSK7C5B

PACKAGING: 1 box = 100 pcs

- For Progressa full extension slides
- Lateral self-alignment feature
- One piece stamped metal, zinc-coated
- Non-handed
- Use a minimum of 4 screws per socket

Narrow metal socket

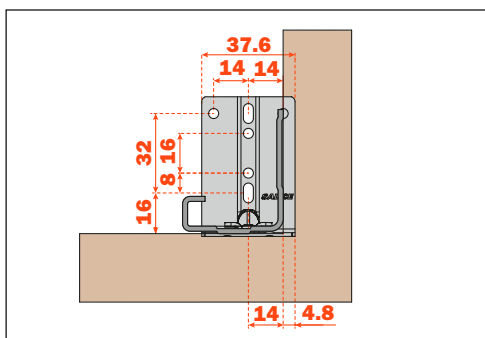



AGSK7R5B

PACKAGING: 1 box = 100 pcs

- For Progressa full extension slides
- Lateral self-alignment feature
- One piece stamped metal, zinc-coated
- Non-handed
- Use a minimum of 4 screws per socket

Plastic sockets - For Progressa slides

Plug in socket

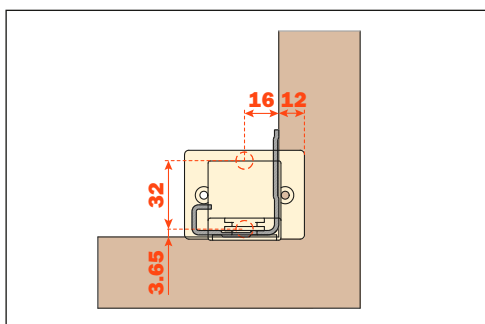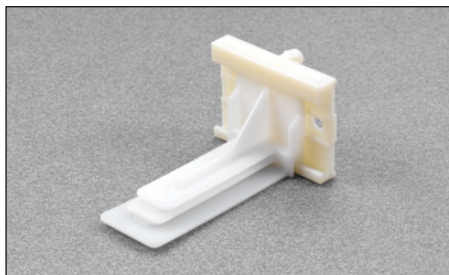


ASOG5G7AJYD

PACKAGING: 1 box = 100 pcs

- For Progressa full extension slides
- Lateral self-alignment feature
- Two pieces synthetic, natural color ABS
- Non-handed
- 8 mm (5/16") dowels
- Screw-on back

Screw on socket


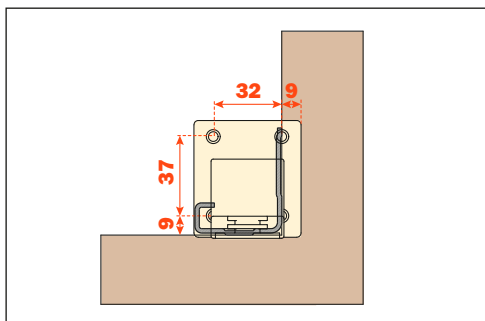


ASOG5G7AJND

PACKAGING: 1 box = 100 pcs

- For Progressa full extension slides
- Lateral self-alignment feature
- Two pieces synthetic, natural color ABS
- Non-handed
- Screw-on back

Screw on socket for 9" slides

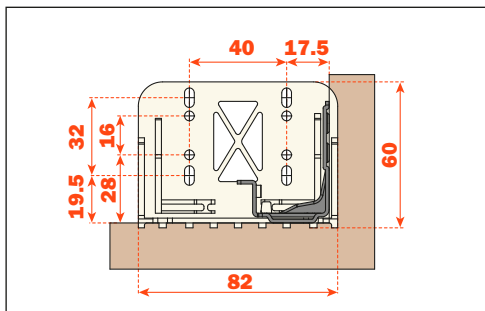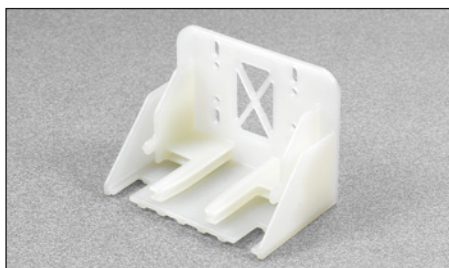

ASO755NAND9

PACKAGING: 1 box = 100 pcs

- For 9" slides
- Minimum inside cabinet depth: 290 mm
- One piece synthetic natural color
- Lateral self-alignment feature
- Non-handed
- Use at least two fixing screws

Drilling templates for drawers - For all Progressa, Progressa⁺ and Progressa⁺ Shelf slides

Pre-drilling for the clips reduces the possibility of splitting the wood, thus assuring the correct and level installation of the clips.

The correct and level mounting assures a smooth assembly and operation of the drawer slide.

ASGD704U3XA

PACKAGING: 1 box = 1 pc.



AFCGXX3B
(right and left)



AFCGX43B
(right and left)




AFCGX43B
(right and left)




Back drilling for hook



Pre-bore for rear hook for proper alignment and depth (min. depth = 10 mm or 13/32")

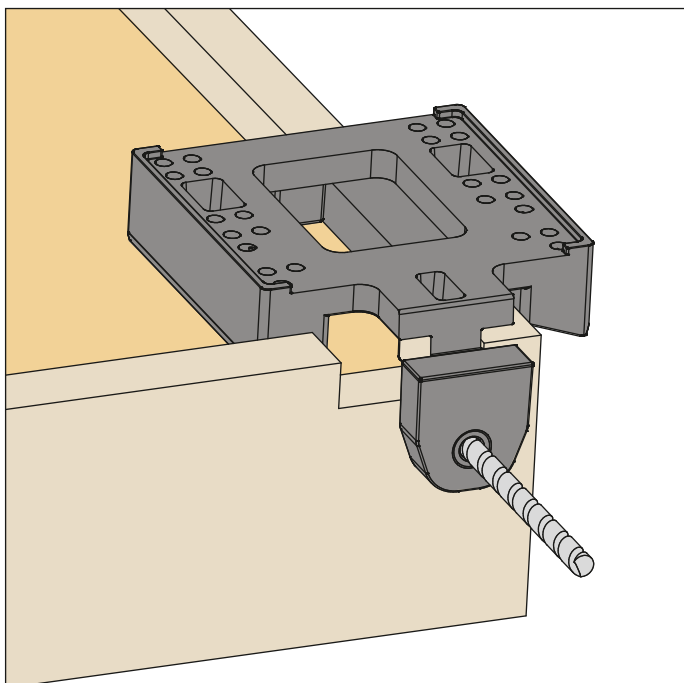

Use a \varnothing 6 mm (1/4") drill bit


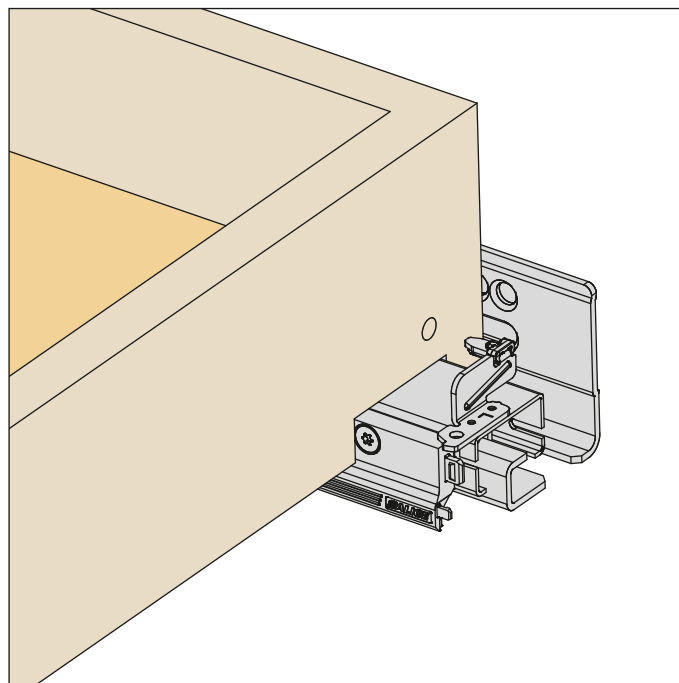


Angled drilling for clips, fixing on the sub-front

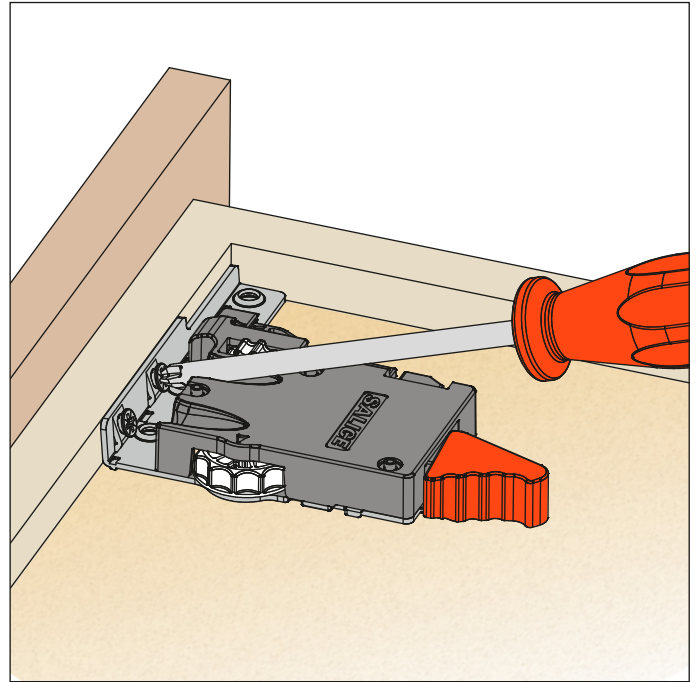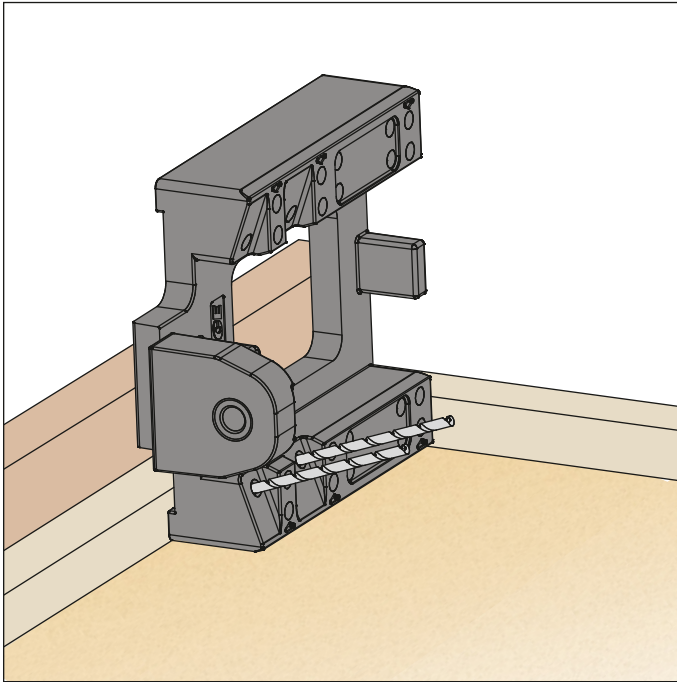

Use a \varnothing 2.5 mm (3/32") drill bit



Vertical drilling for clips, fixing on the bottom

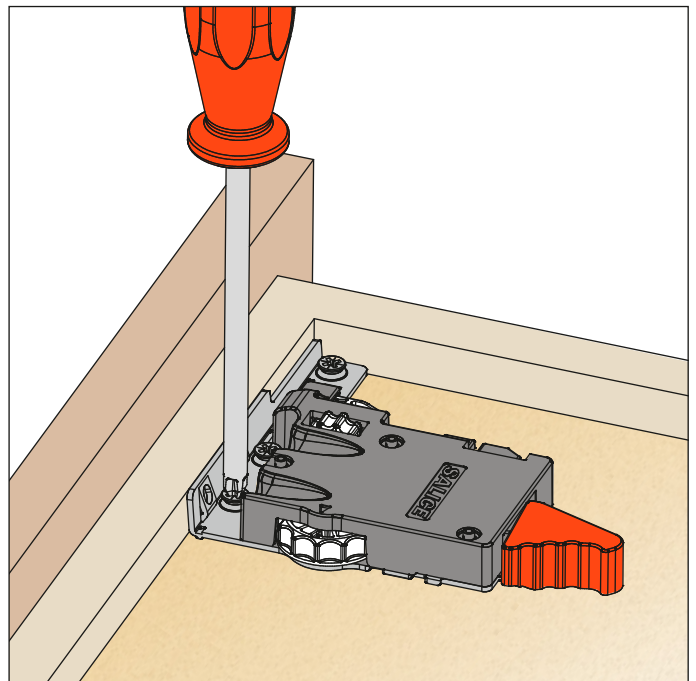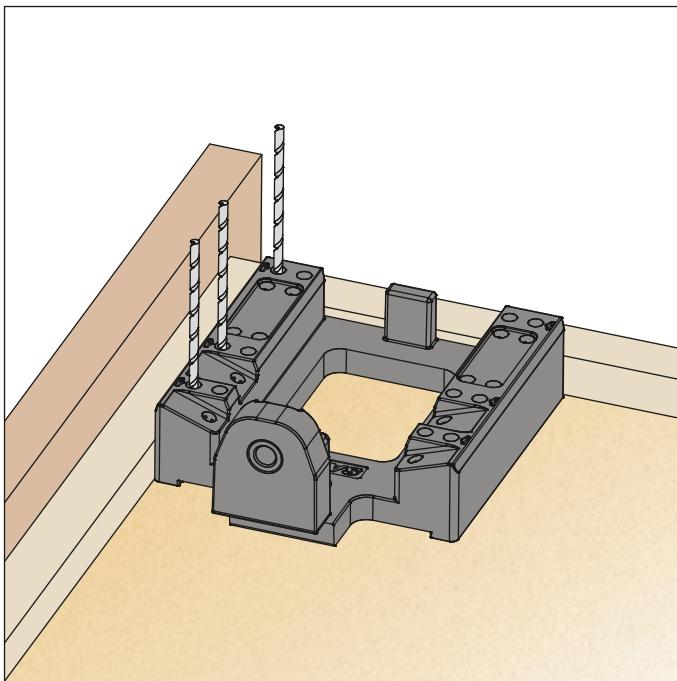


Use a \varnothing 2.5 mm (3/32") drill bit

Drilling templates for drawers

Fixing directly on drawer bottom

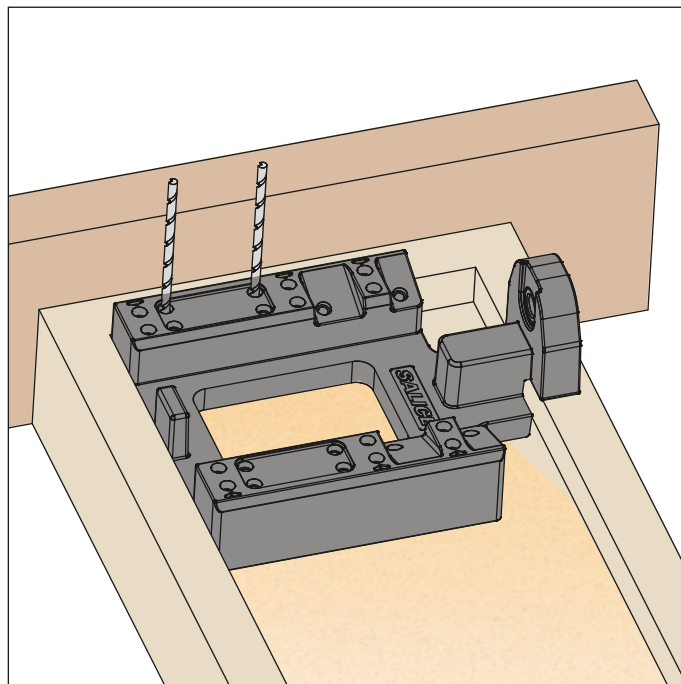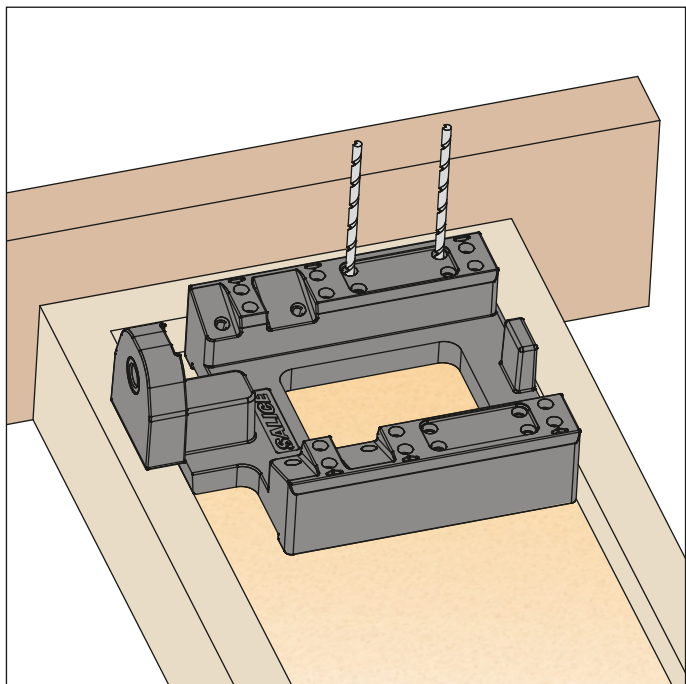

Use a \varnothing 2.5 mm (3/32") drill bit

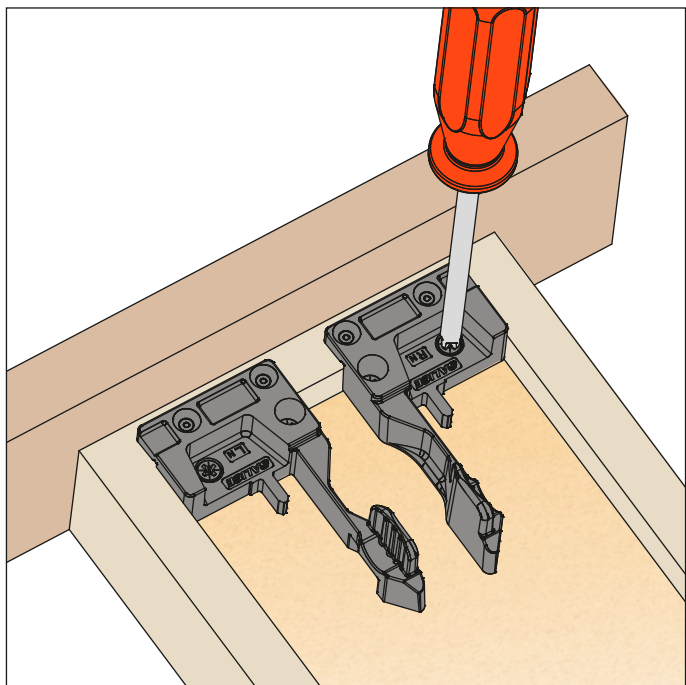


Drilling templates for drawers - For all Progressa, Progressa⁺ and Progressa⁺ Shelf slides

Pre-drilling for the clips reduces the possibility of splitting the wood, thus assuring the correct and level installation of the clips.

The correct and level mounting assures a smooth assembly and operation of the drawer slide.

ASGD504U6XA

PACKAGING: 1 box = 1 pc.

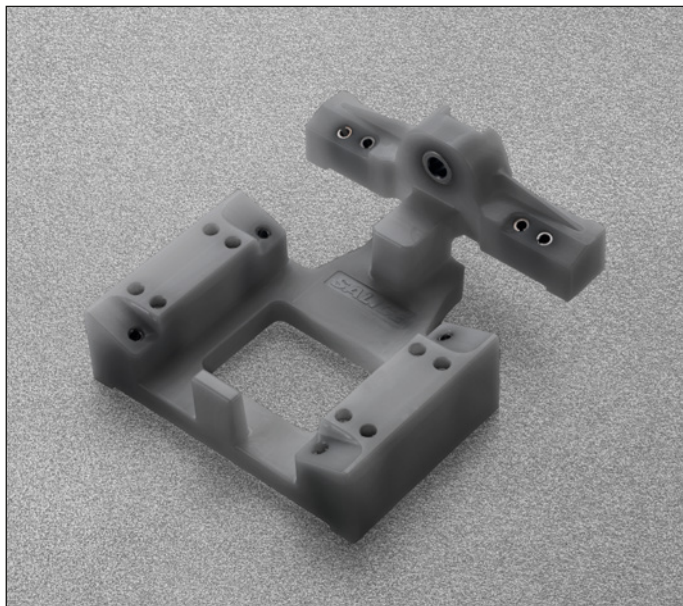



AFCEX56B

(right and left)



Back drilling for hook


Pre-bore for rear hook for proper alignment and depth (min. depth = 10 mm or 13/32")

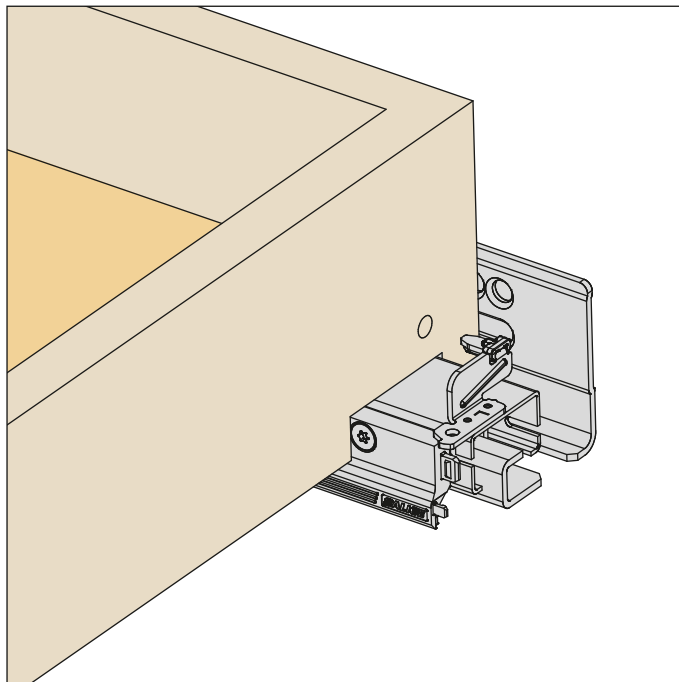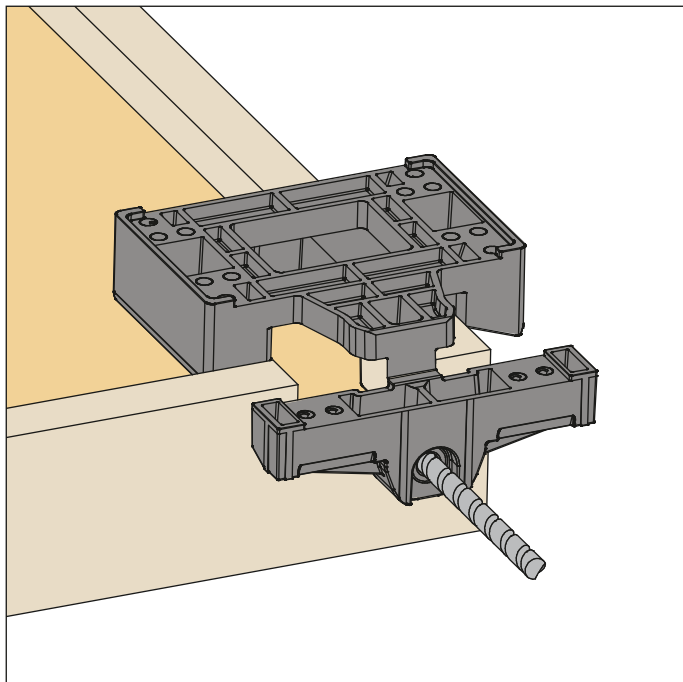


Use a \varnothing 6 mm (1/4") drill bit

Drilling templates for drawers

Fixing the clip on the drawer member

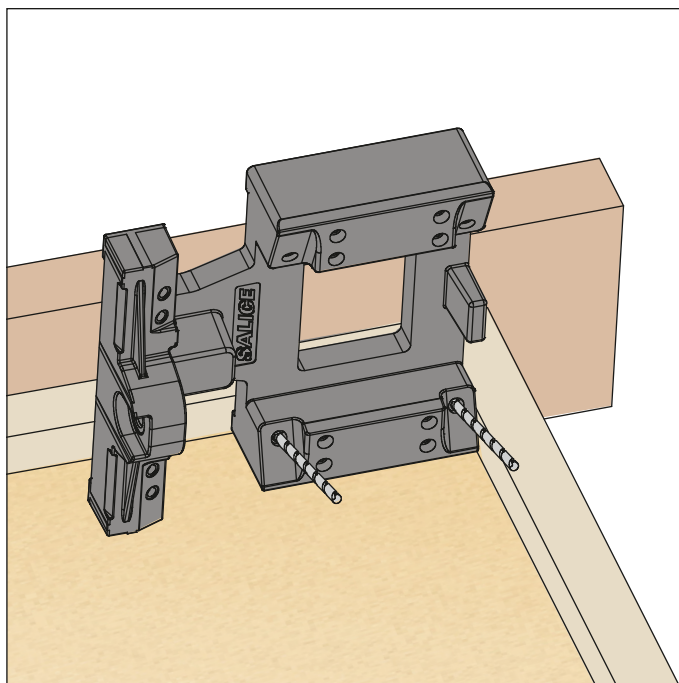


Use a $\varnothing 2.5$ mm (3/32") drill bit

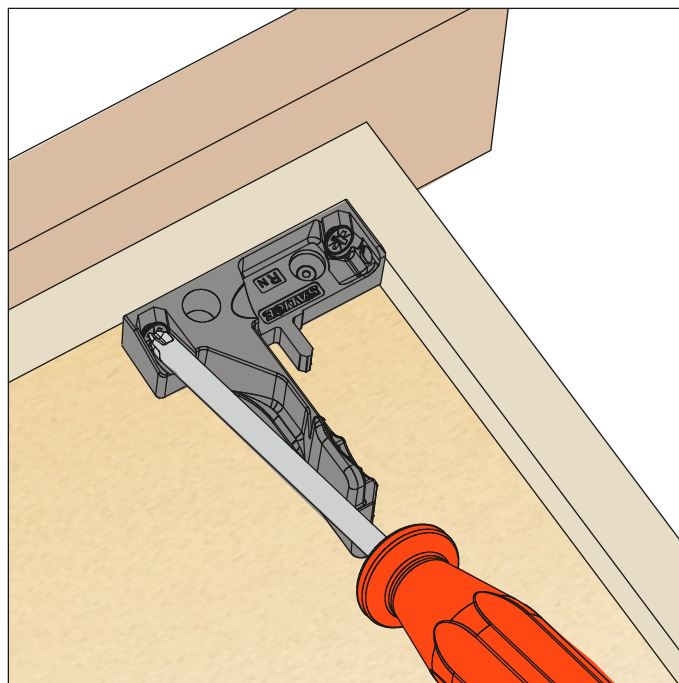


The use of 6 x 5/8" screws is recommended for a correct operation of the clips


Vertical drilling for clips, fixing on the bottom

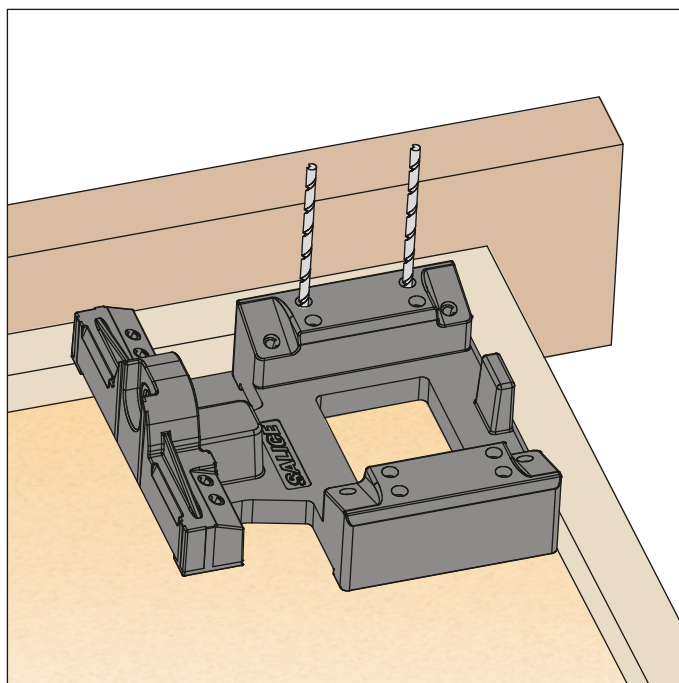


Use a $\varnothing 2.5$ mm (3/32") drill bit

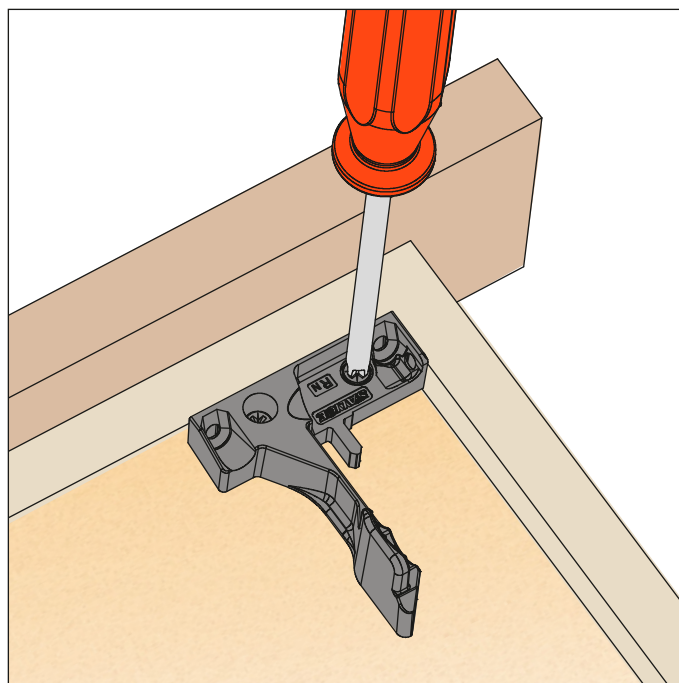

Optional lateral fixing

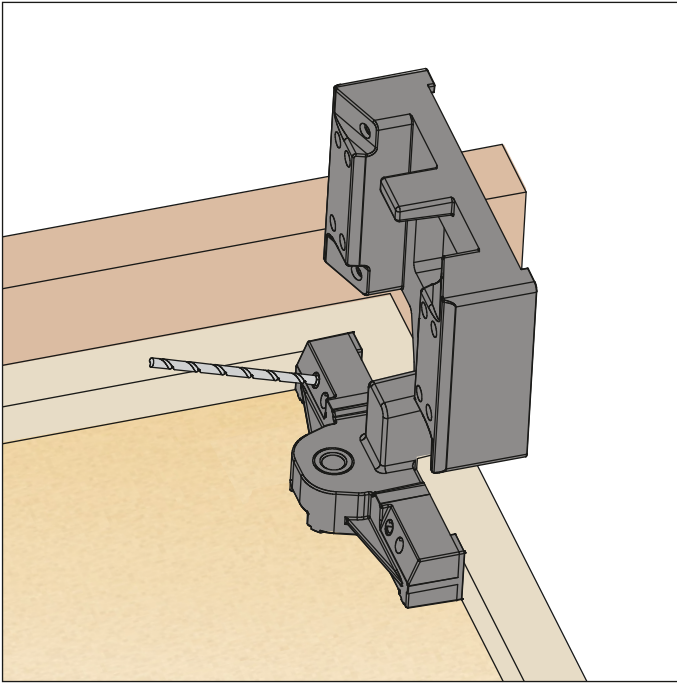


Use a \varnothing 2.5 mm (3/32") drill bit

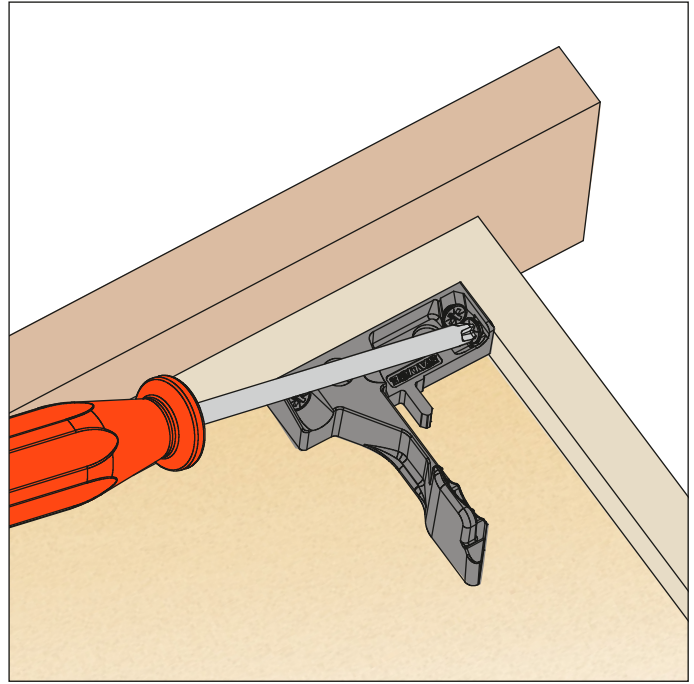

The use of 6 x 5/8" screws is recommended for a correct operation of the clips

Accessories - For all Progressa and Progressa⁺ slides

Tilt adjustment lever

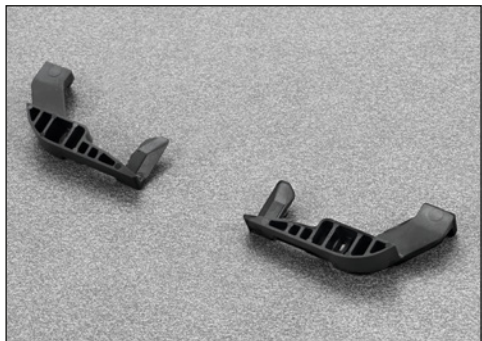


AGLRXX3F

PACKAGING: 1 box = 12 pcs right / 12 pcs left

Technical information, see page 27.


Side spacer

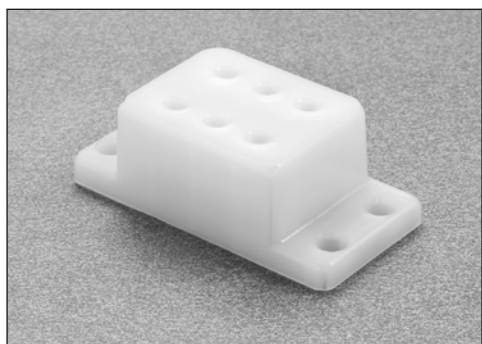


ASPACERFUT

PACKAGING: 1 box = 100 pcs

For spacing out Progressa runners for clearance on interior roll-outs.

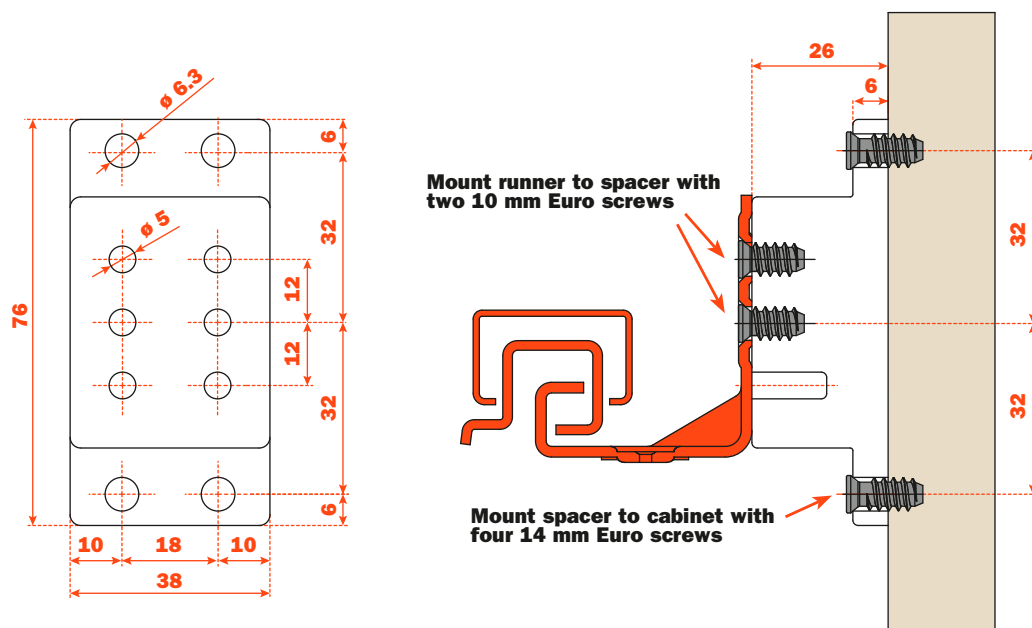

Spacer for 1/2" drawer sub-fronts

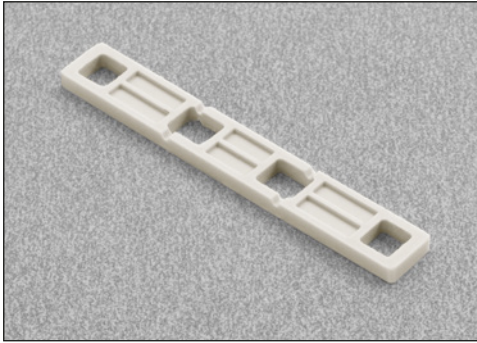

AFSFXXB

For drawer sides with sub-fronts between 12 and 13 mm (1/2"), we recommend the use of the build-up spacer.




PACKAGING: 1 box = 100 pcs

When drawer sub-fronts are too thin, they may not engage properly with the front locking devices on the drawer slides, leading to compromised functionality.




The Front Locking Device Spacer for Thin Drawer Sub-Fronts is a precision-engineered solution for Progressa slides, designed specifically to accommodate sub-front thicknesses of 12 mm (15/32") and 13 mm (1/2").

This spacer can only be used with the AFCGXX3B or the AFCEX56B front locking devices as shown below.


To be used with **AFCGXX3B** front locking device (right and left)

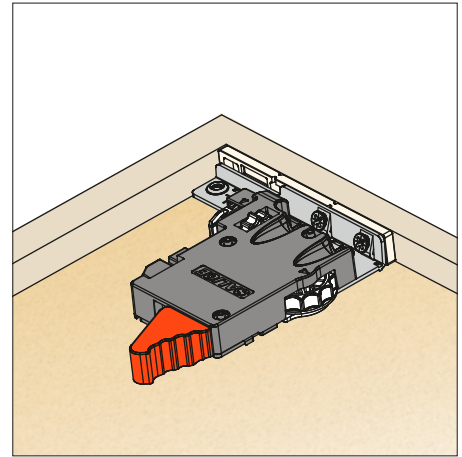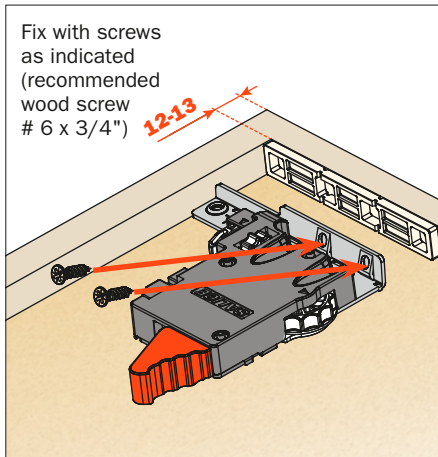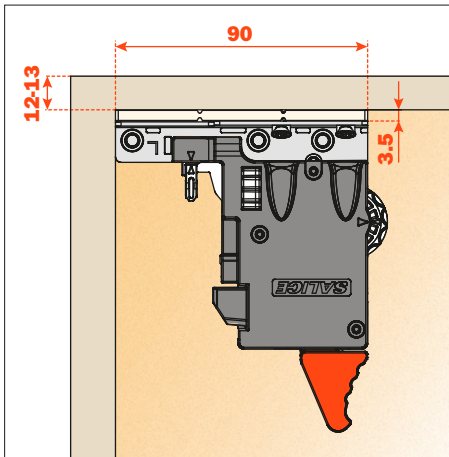

To be used with **AFCEX56B** front locking device (right and left)

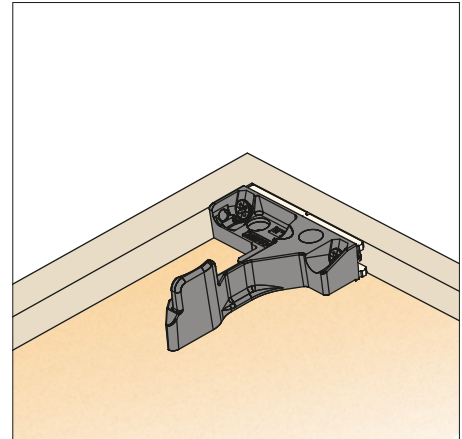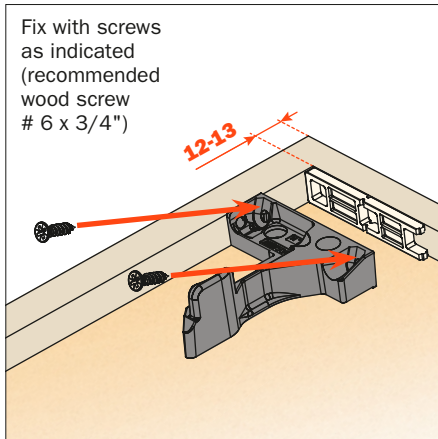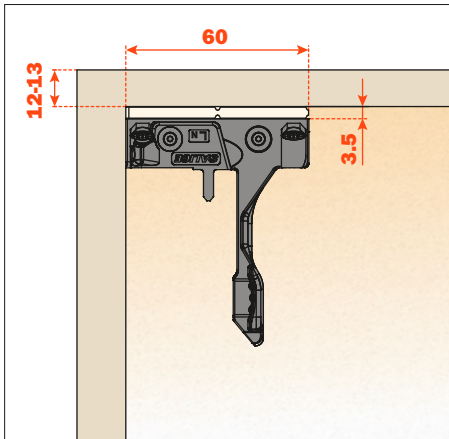


Spacer can be fit to any size by breaking tabs

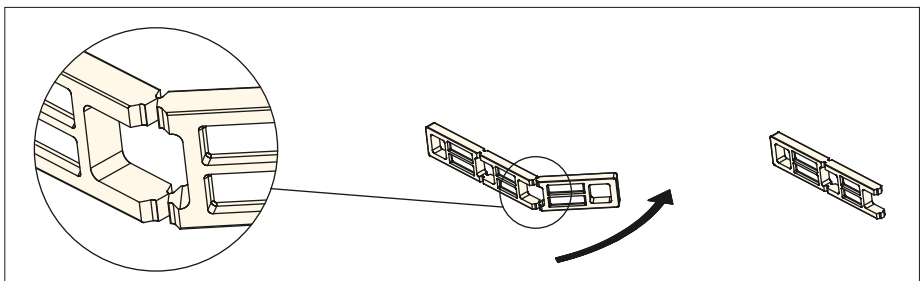

Accessories - For Progressa+ Shelf slides

Rear-fixed bracket and magnet - Lock-open function for runners and drawers


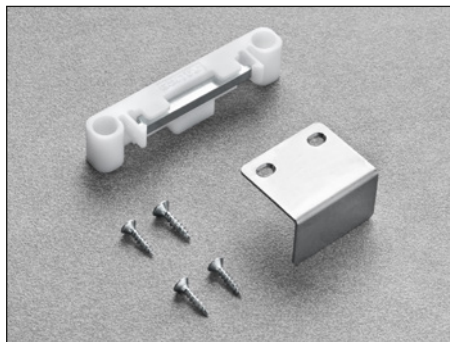


AROSXXY

PACKAGING: 1 box = 20 magnets, 20 brackets. Screws included.

The shelf is held at the maximum opening position by means of a rear-fixed bracket and a magnet.

Rear hook bracket

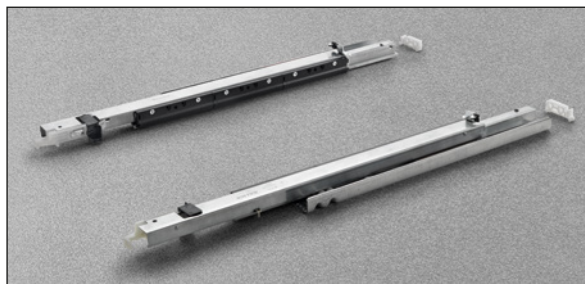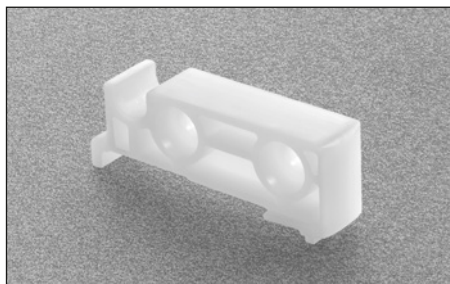


AGAPXXYI

PACKAGING: 1 box = 100 pcs


For shelves that are less than 12 mm thick, the runner can be used together with the rear hook bracket (10 mm thickness) thus eliminating the need for the rear hole in the shelf.

Assembly instructions


1 A) Fix the bracket, aligned with the back of the shelf.

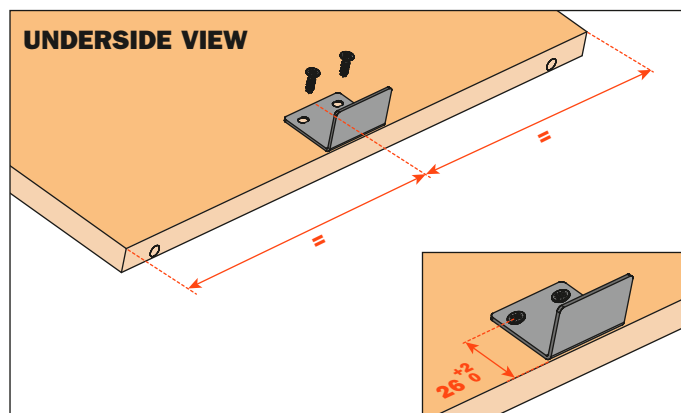


1 B) Fix the bracket to the shelf with the rear hook support. The bracket needs to be aligned to the rear hook support.

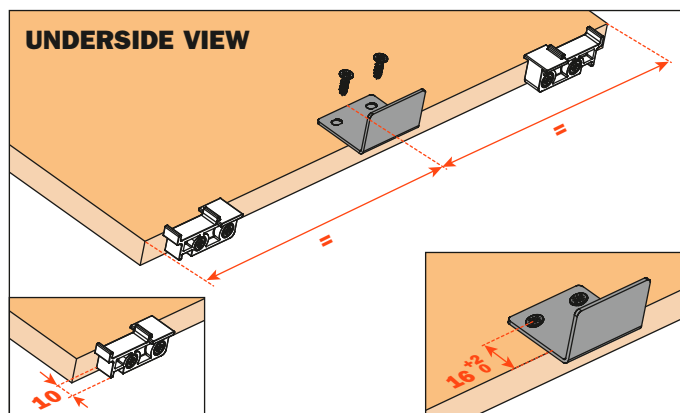

2) Fix the magnet to the bottom.

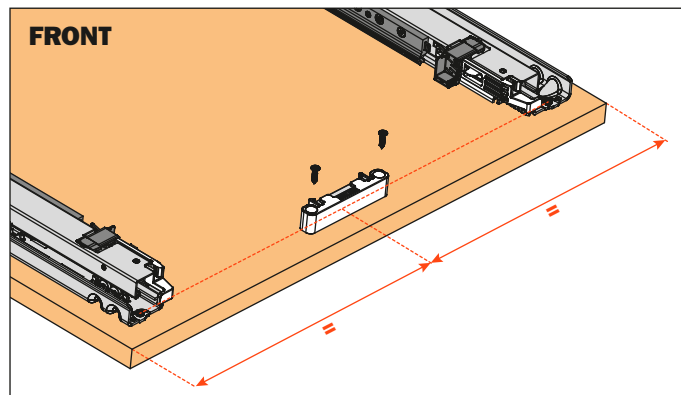

3) The shelf is held at the maximum opening position.

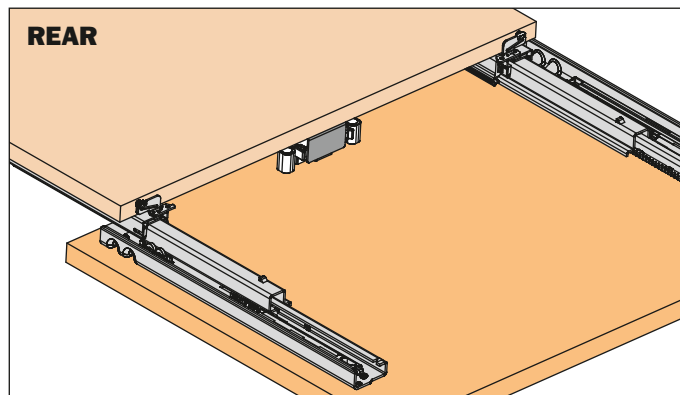

Accessories - For all Progressa, Progressa+ and Progressa+ Shelf slides

Wood screw




V234X164I

PACKAGING: 1 box = 100 pcs

Wood screw # 6 x 16 mm (5/8")


Euro screw



V136X114I

PACKAGING: 1 box = 100 pcs

Euro screw # 6 x 11 mm (7/16")



V136X154I

PACKAGING: 1 box = 100 pcs

Euro screw # 6 x 14.5 mm (9/16")

Pozi driver




D2A7XCXCP

PACKAGING: 1 box = 100 pcs

Accessories - For all Progressa, Progressa+ and Progressa+ Shelf slides**Ø 6 mm drill bit for rear hook****TDB7406R**

PACKAGING: 1 box = 1 pc.

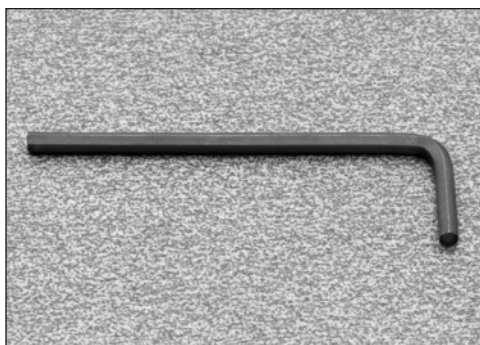Hex key to lock the stop collar set screw onto the 6 mm drill bit**TLKEY332**

PACKAGING: 1 box = 1 pc.

Drill bit stop collar for 6 mm bit**TSC06MM**

PACKAGING: 1 box = 1 pc.