

## **Accessories**

## Push Synchronizer bar

The synchronization system for Push-to-Open **Progressa+ Push** and **Progressa+ Shelf Push** slides has been developed to ensure that wider drawers can be opened with minimum effort, regardless of where pressure is applied.

The system links the two runners, which then become a single element; applying pressure on any part of the drawer front (even at the extremities), is sufficient for the Push devices to release and consequently for the drawer to open.

The synchronization can be used with any drawer width; its functionality is at its best with drawers wider than 762 mm (30").


### PRODUCT FEATURES:

- frameless or blocked out face frame applications
- smooth and progressive running action
- slide load capacity remains unchanged
- available on any **Progressa+ Push** and **Progressa+ Shelf Push** runners length
- minimum opening (X) = 280 mm
- maximum opening (X) = 1305 mm
- bar length = 1150 cut to size



## Technical information - Formula for cutting the bar to length


The assembly of the synchronizer requires a minimum 76 mm notch in the rear of the drawer

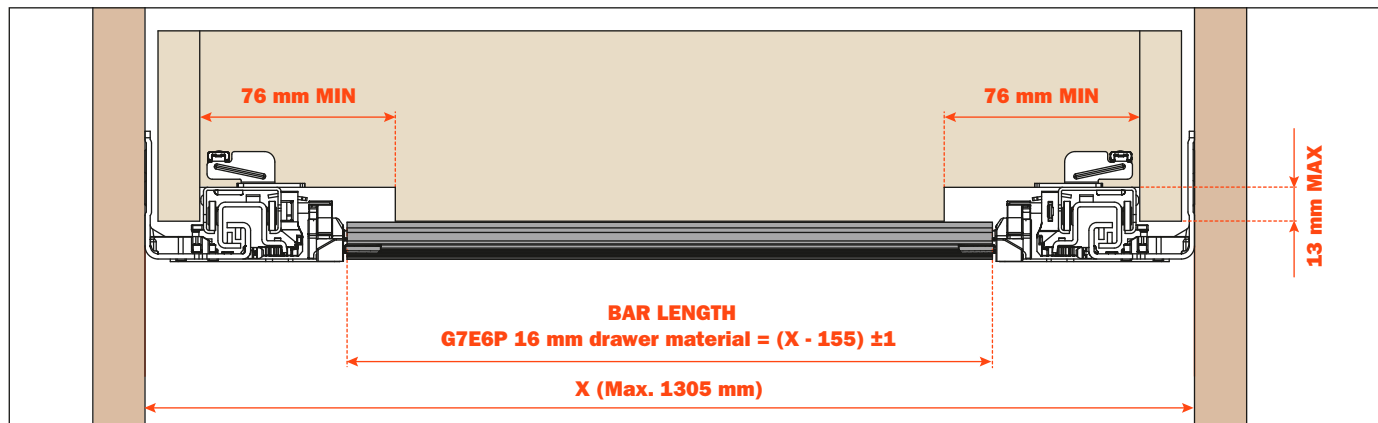


**X = Internal width of the cabinet**

## Assembly instructions


Insert and slide the carrier plates into position on the runners in the direction indicated by the arrows

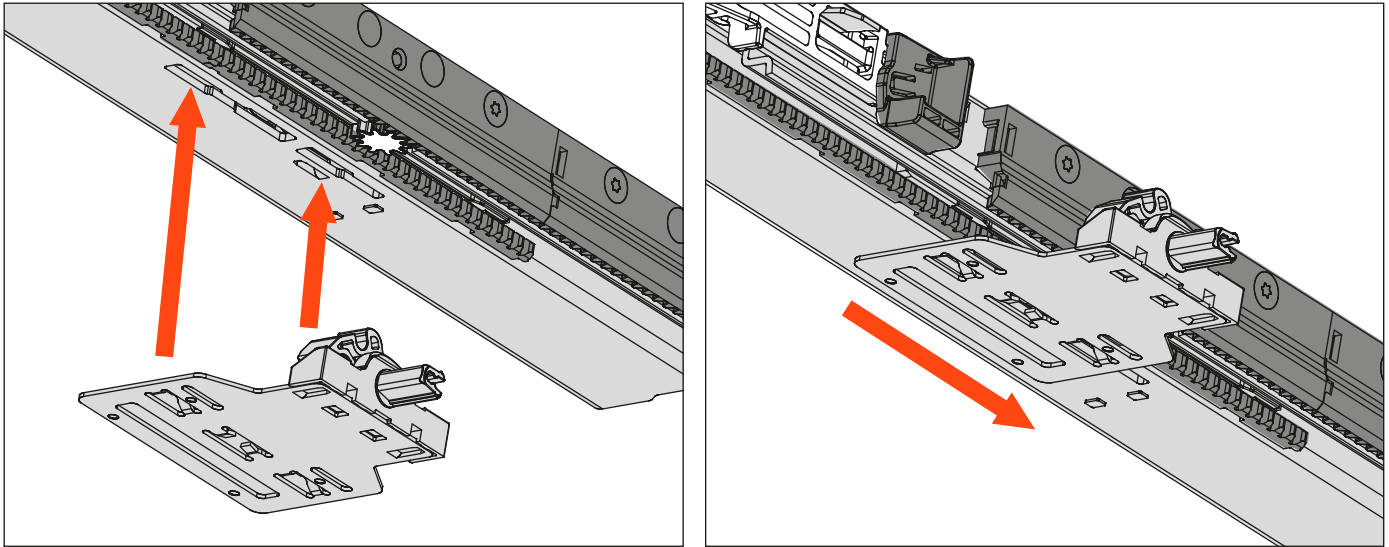

Fitting the driver pins to the runners

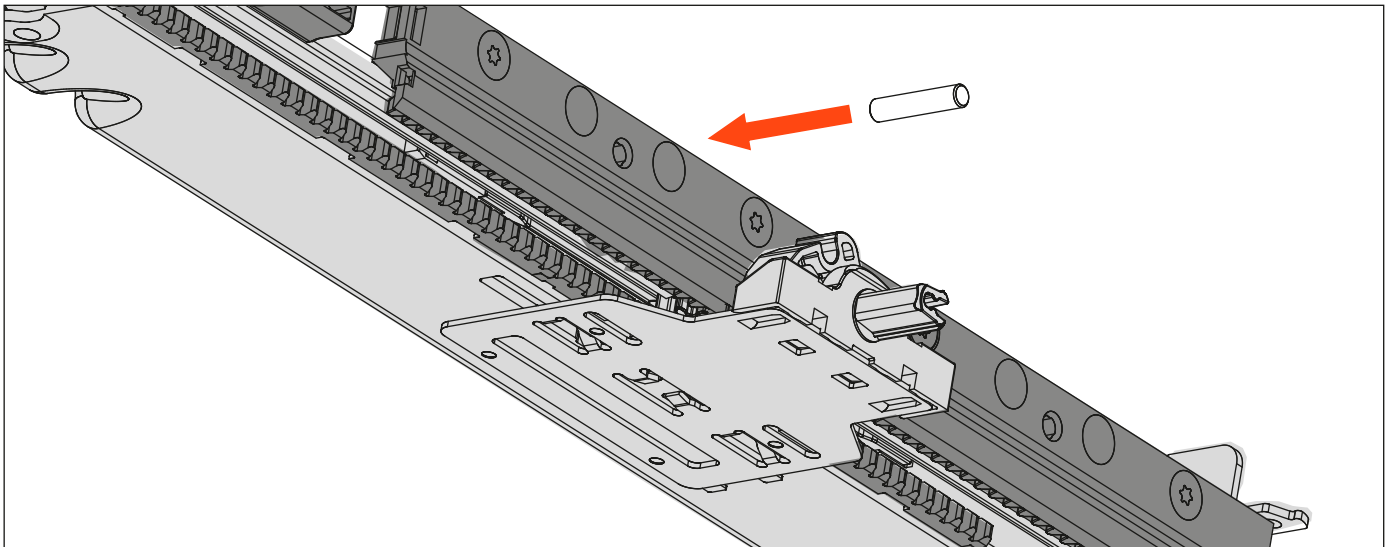


Cut the synchronizer bar to length

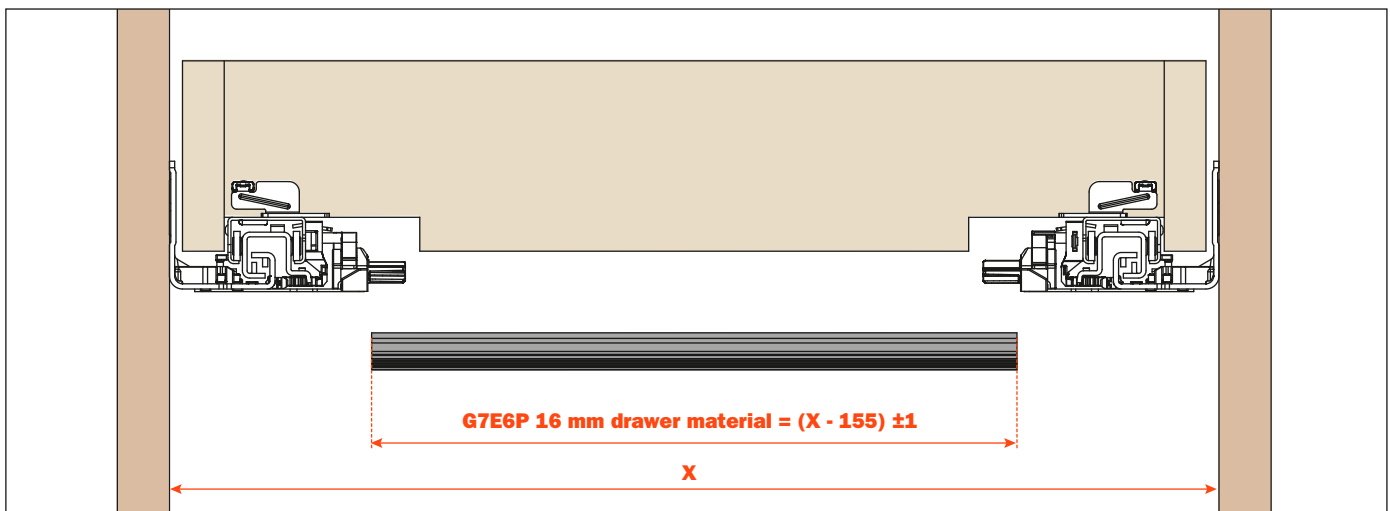


## Push synchronizer - Assembly instructions

Fix the bar to the plates and insert the drawer

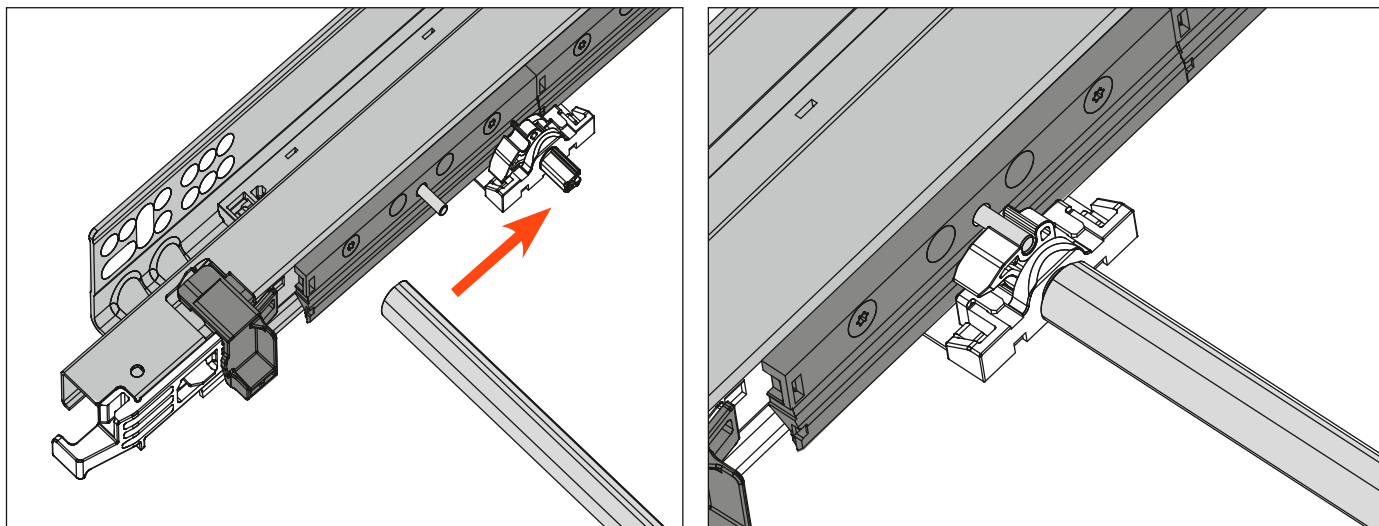

Applying pressure on any part of the drawer front is sufficient for the drawer to open

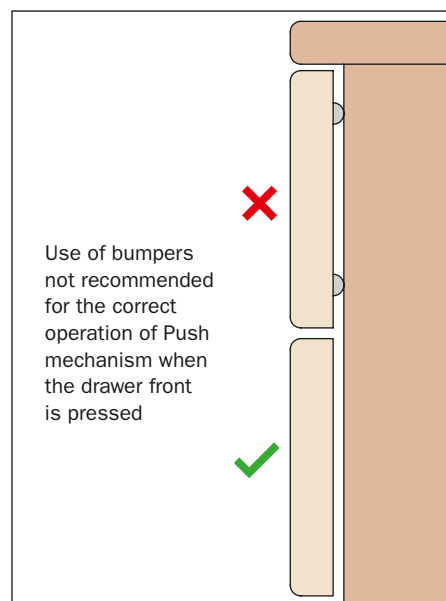

## Packaging

### SINGLE KIT PACKAGING

#### APKF7X51150

PACKAGING: 1 box = 20 single kits

1 KIT CONTAINS:

- 1 stabilizer bar
- 2 driver pins
- 1 right carrier plate and 1 left carrier plate







## Drilling templates for drawers - For all Progressa, Progressa<sup>+</sup> and Progressa<sup>+</sup> Shelf slides

Pre-drilling for the clips reduces the possibility of splitting the wood, thus assuring the correct and level installation of the clips.

The correct and level mounting assures a smooth assembly and operation of the drawer slide.

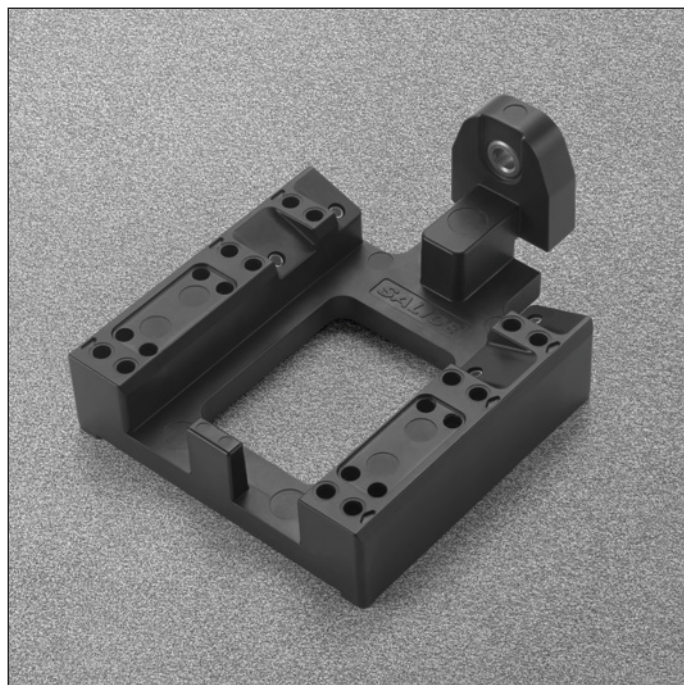

**Front locking device**  
**AFCGXX3B**  
**Right and left**


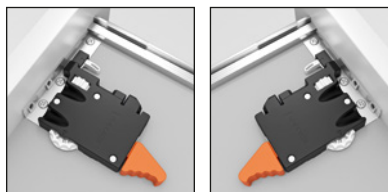


**Drilling template**  
**ASGD704U3XA**

PACKAGING: 1 box = 1 pc.

### Back drilling for hook

Pre-bore for rear hook for proper alignment and depth (min. depth = 10 mm)

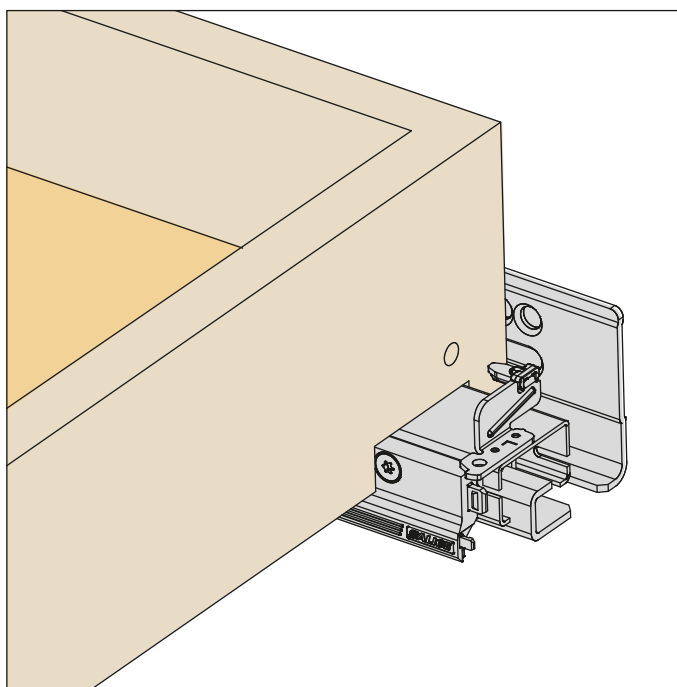
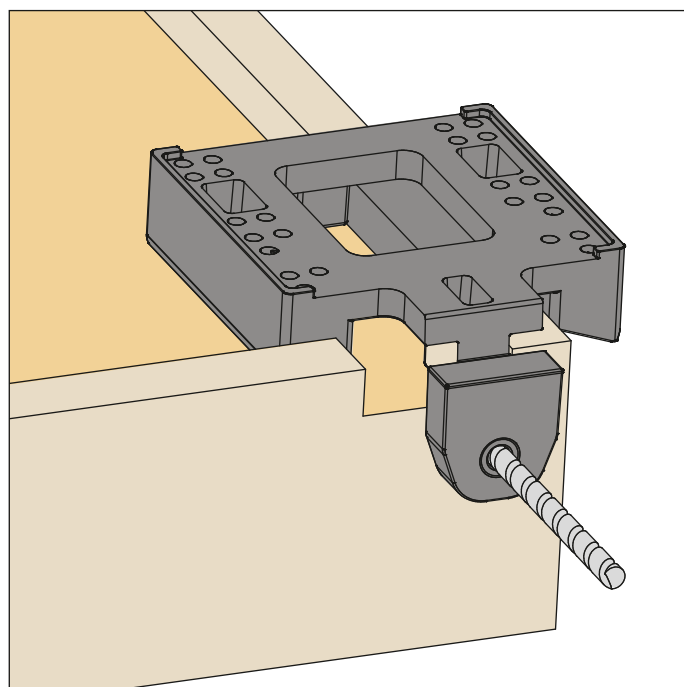


Use a  $\varnothing$  6 mm drill bit

Technical information, see page 10.



## Drilling templates for drawers

Pre-drilling  $\varnothing$  2.5 mm, to assemble the clips to the front of the drawer

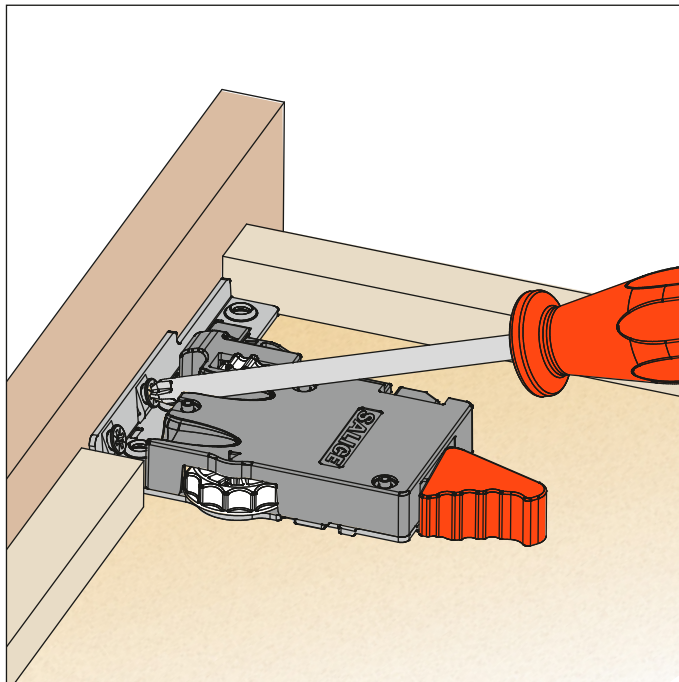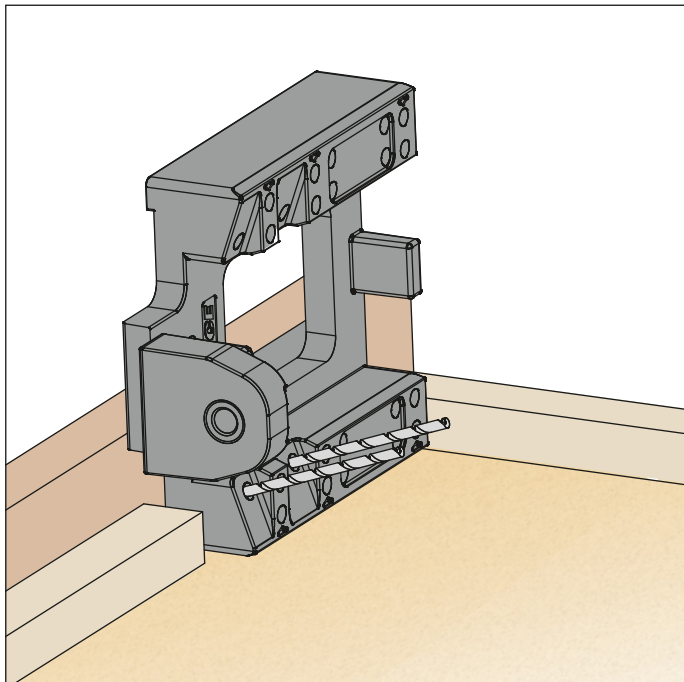


The use of  $\varnothing$  4 x 16 mm screws is recommended for a correct operation of the clips

Pre-drilling  $\varnothing$  2.5 mm, to assemble the clips to the drawer bottom

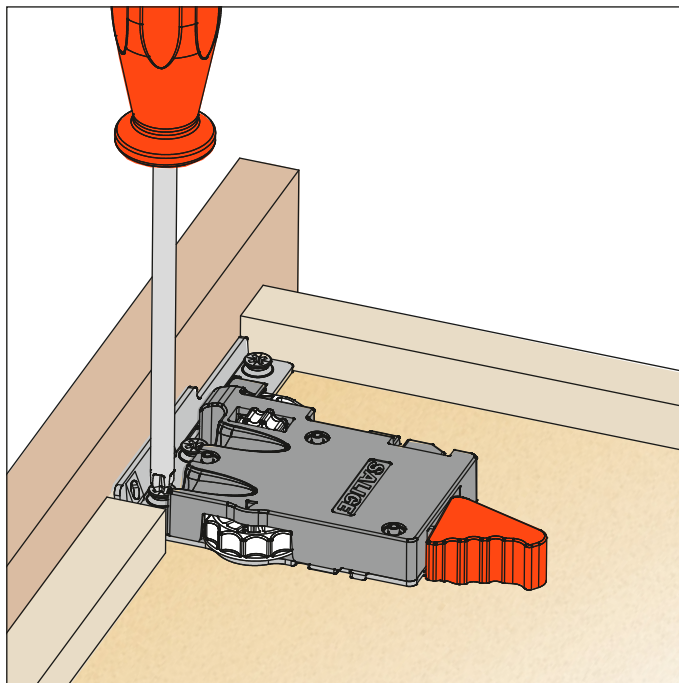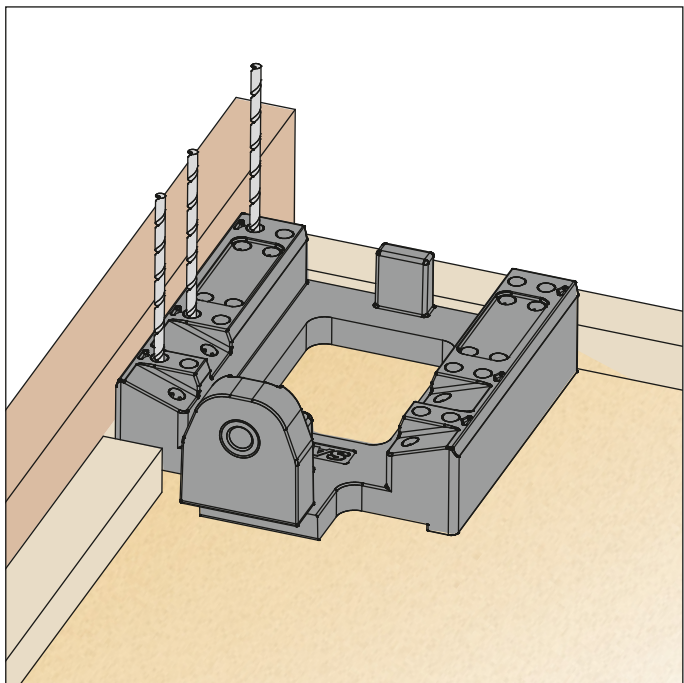


## Drilling templates for drawers - For all Progressa, Progressa<sup>+</sup> and Progressa<sup>+</sup> Shelf slides

Pre-drilling for the clips reduces the possibility of splitting the wood, thus assuring the correct and level installation of the clips.  
The correct and level mounting assures a smooth assembly and operation of the drawer slide.

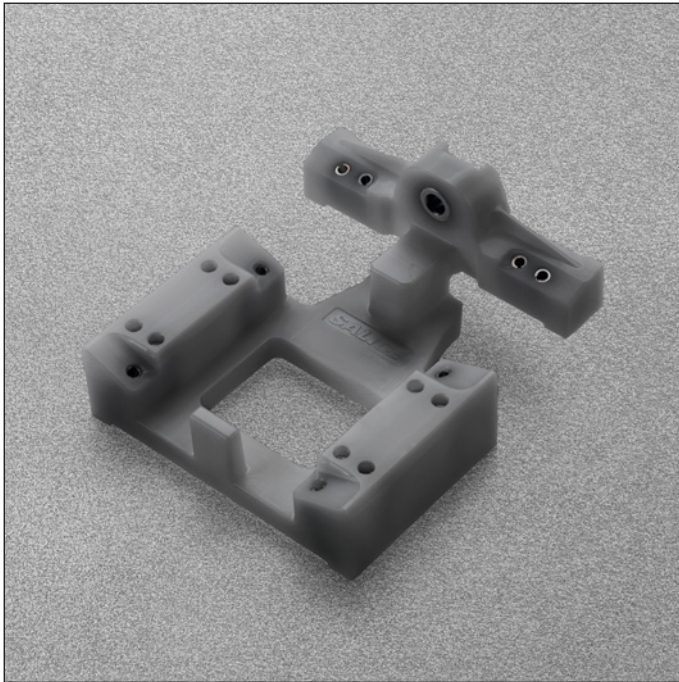

**Front locking device**  
**AFCEX56B**  
**Right and left**

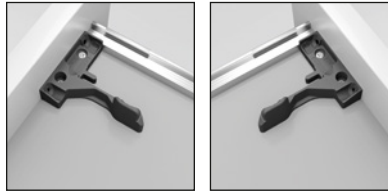



**Drilling template**  
**ASGD504U6XA**

PACKAGING: 1 box = 1 pc.

---

### Back drilling for hook



Pre-bore for rear hook for proper alignment and depth (min. depth = 10 mm)

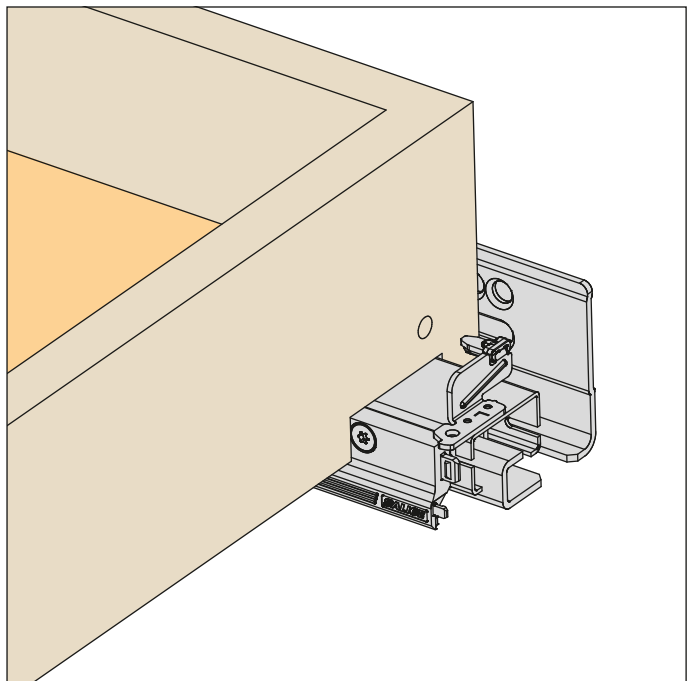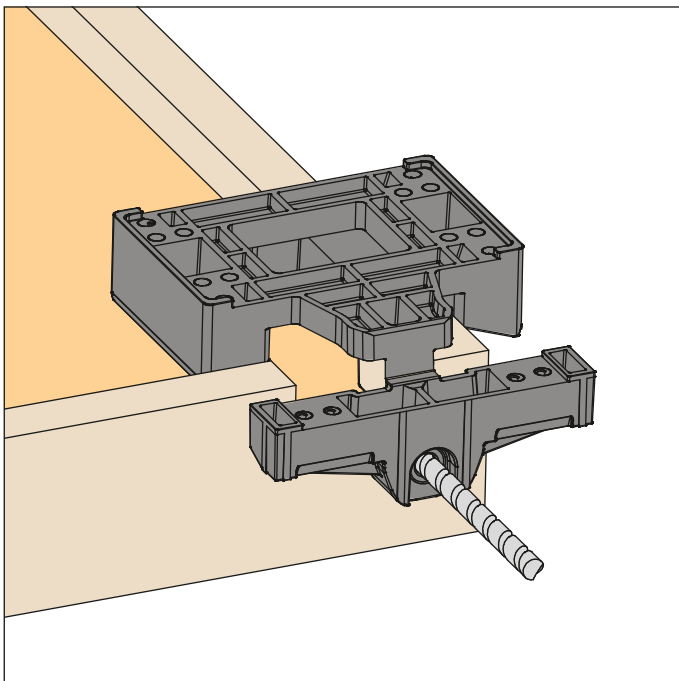

Use a  $\varnothing$  6 mm drill bit  
Technical information, see page 10.



## Drilling templates for drawers

### Fixing the clip on the drawer member

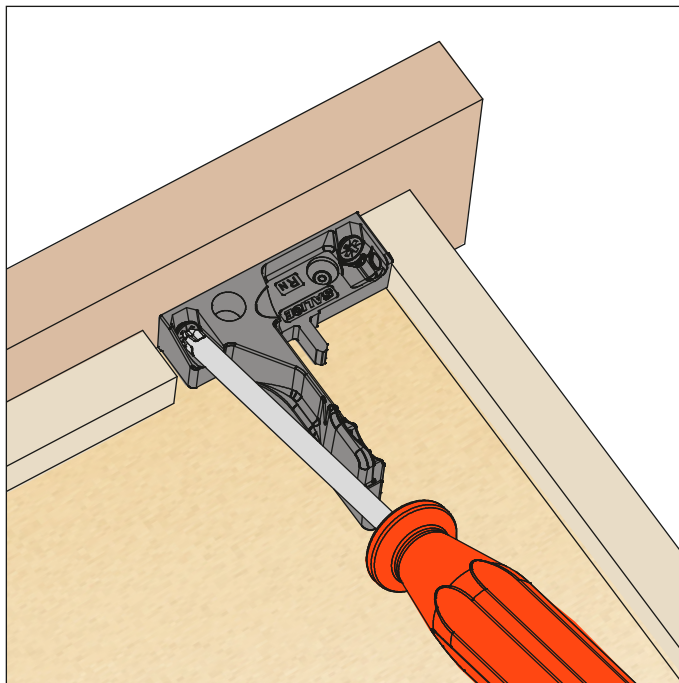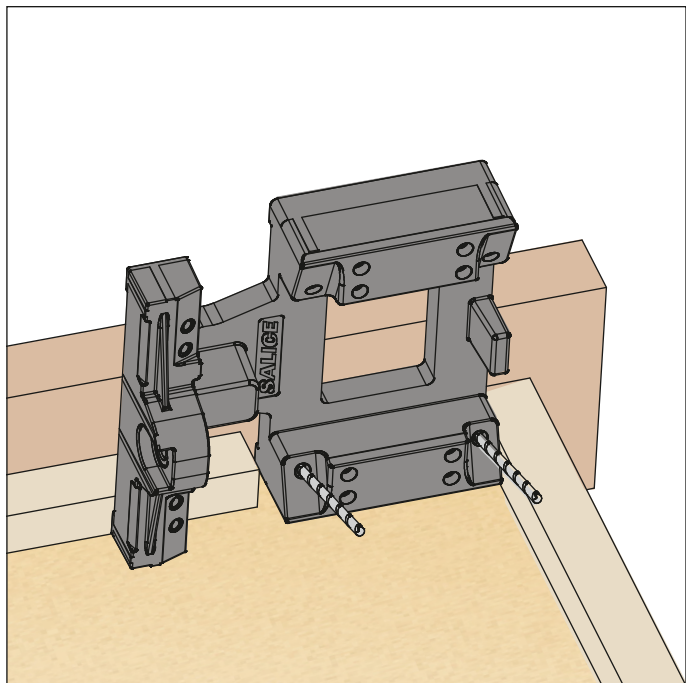



The use of  $\varnothing 6 \times 16$  mm screws is recommended for a correct operation of the clips

### Vertical drilling for clips, fixing on the bottom

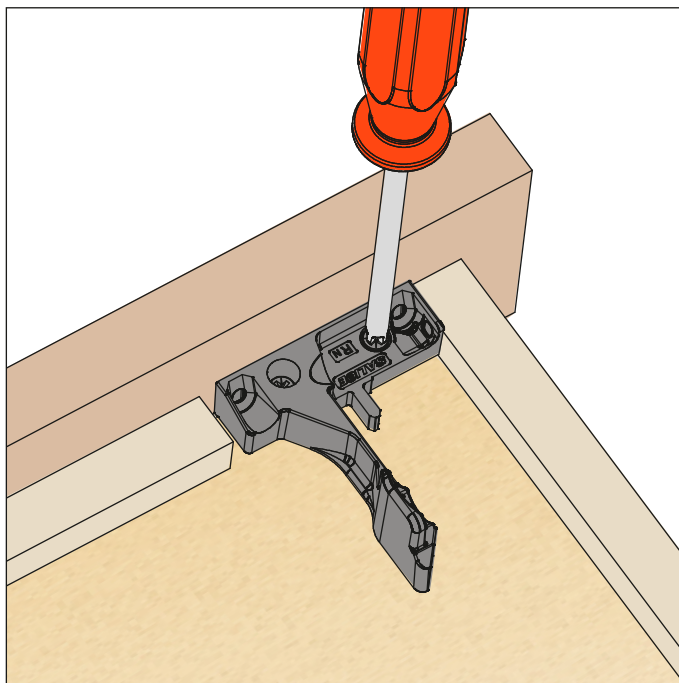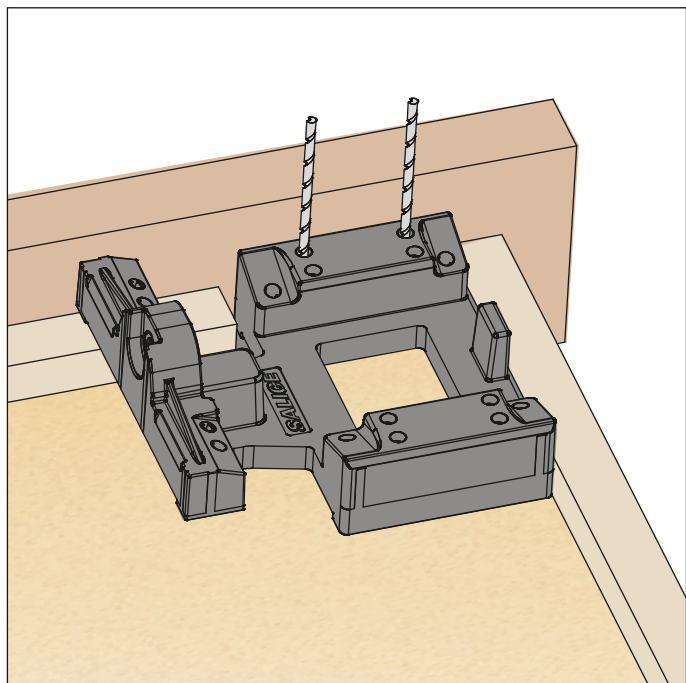




### Optional lateral fixing

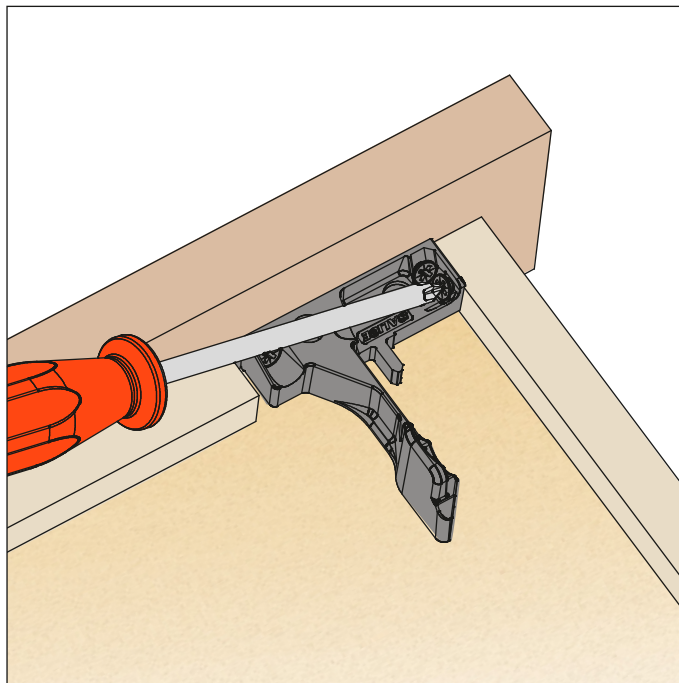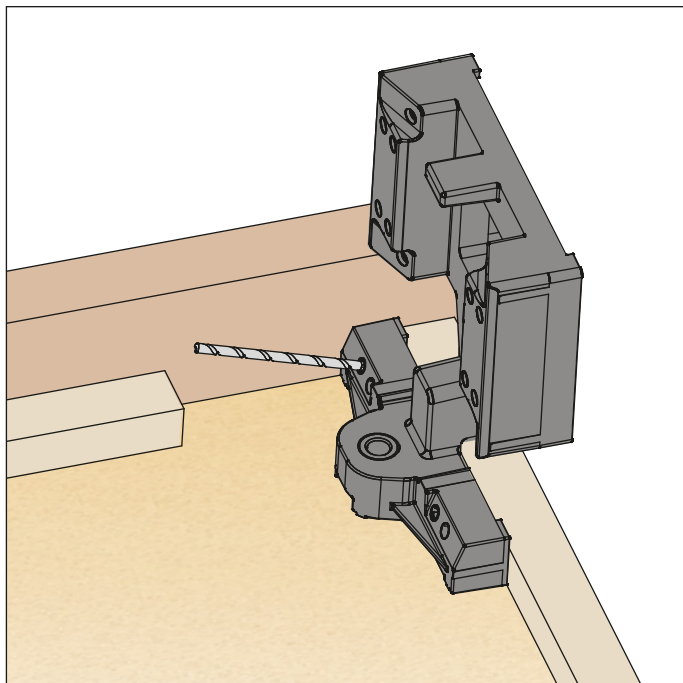

The use of  $\varnothing 6 \times 16$  mm screws is recommended for a correct operation of the clips

## Accessories - For all Progressa and Progressa<sup>+</sup> slides

### Tilt adjustment lever

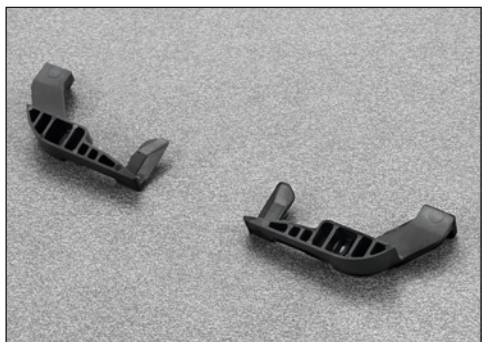

#### AGLRXX3F

PACKAGING: 1 box = 12 pcs right / 12 pcs left

Technical information, see page 23.


### Side spacer




#### ASPACERFUT

For spacing out Progressa runners for clearance on interior roll-outs.

PACKAGING: 1 box = 100 pcs

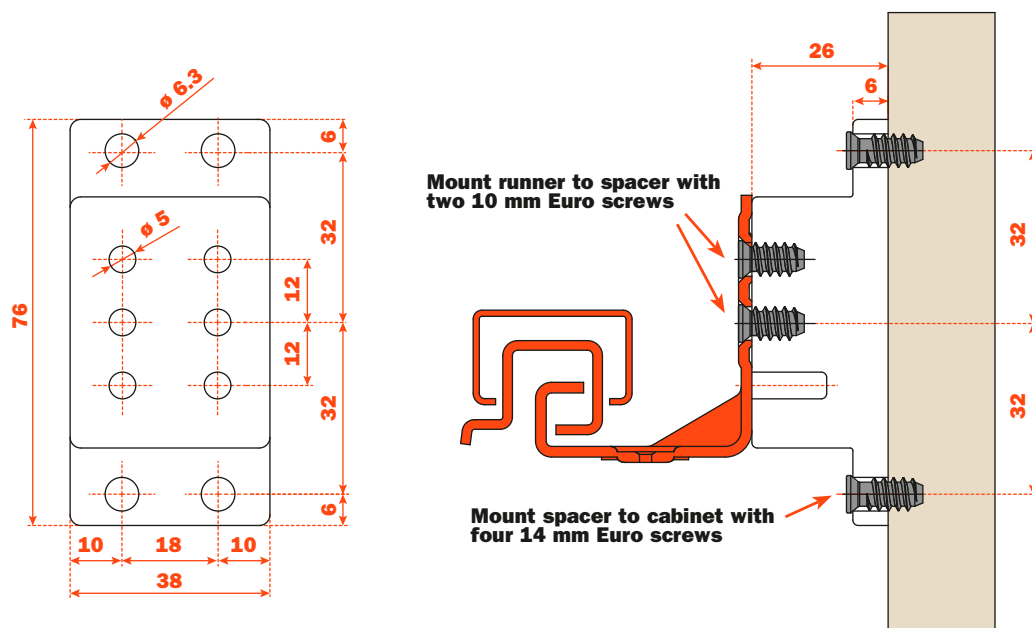

## Spacer for 1/2" drawer sub-fronts

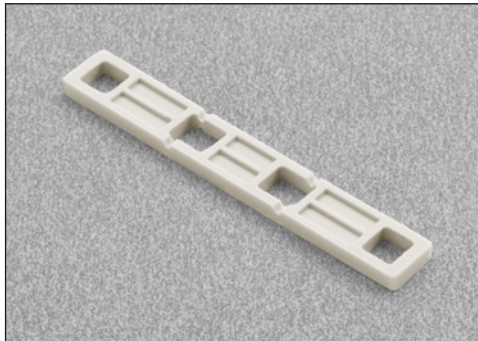

### AFSFXXB

For drawer sides with sub-fronts between 12 and 13 mm (1/2"), we recommend the use of the build-up spacer




PACKAGING: 1 box = 100 pcs

When drawer sub-fronts are too thin, they may not engage properly with the front locking devices on the drawer slides, leading to compromised functionality.




The Front Locking Device Spacer for Thin Drawer Sub-Fronts is a precision-engineered solution for Progressa slides, designed specifically to accommodate sub-front thicknesses of 12 mm (15/32") and 13 mm (1/2").

This spacer can only be used with the AFCGXX3B or the AFCEX56B front locking devices as shown below.


To be used with **AFCGXX3B** front locking device (right and left)

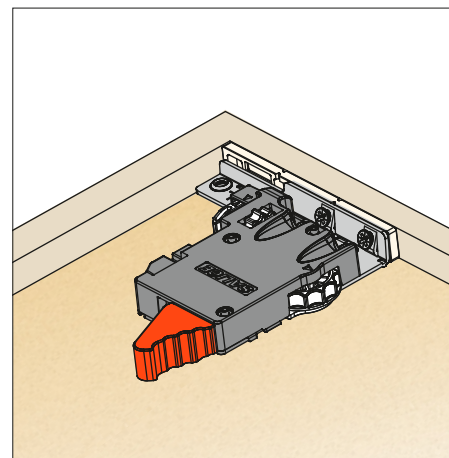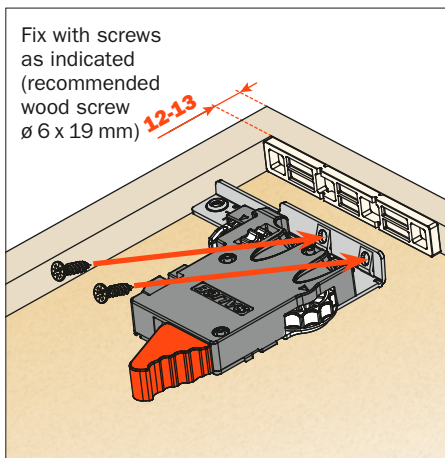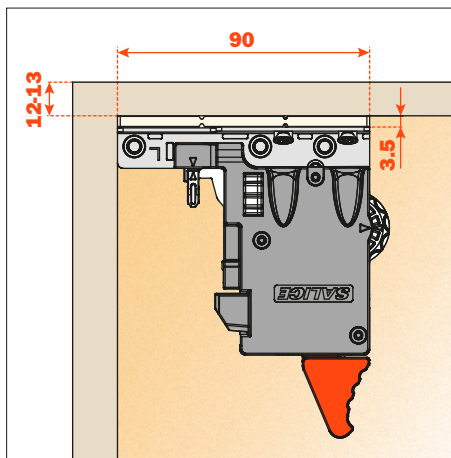

To be used with **AFCEX56B** front locking device (right and left)

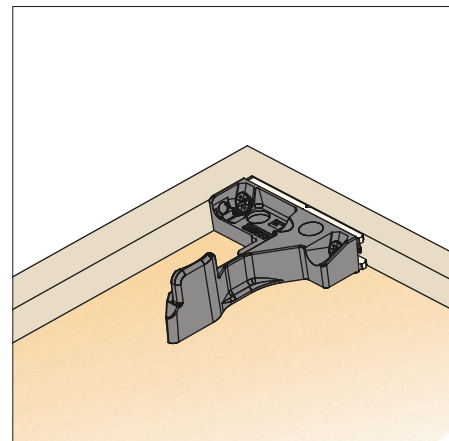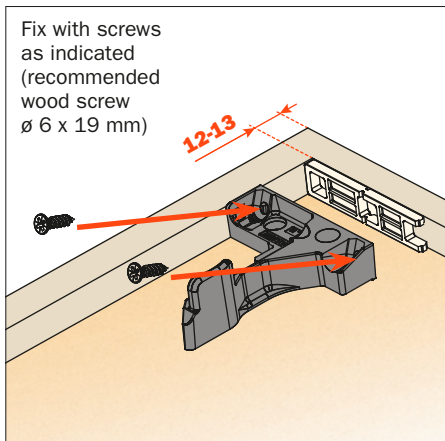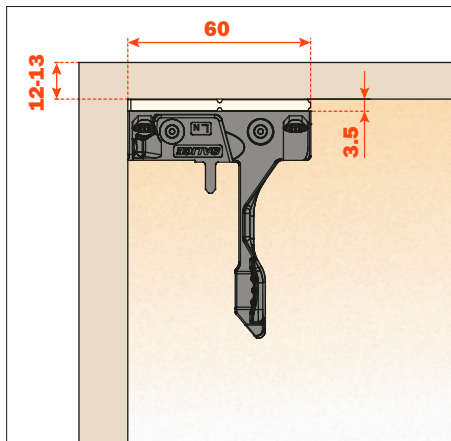

Spacer can be fit to any size by breaking tabs

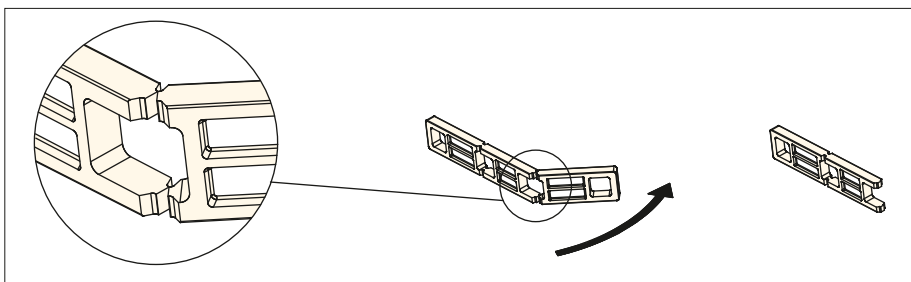

## Accessories - For all Progressa, Progressa+ and Progressa+ Shelf slides

### Wood screw




#### V234X164I

Wood screw # 6 x 16 mm (5/8")

PACKAGING: 1 box = 100 pcs


### Euro screw



#### V136X114I

Euro screw # 6 x 11 mm (7/16")

PACKAGING: 1 box = 100 pcs



#### V136X154I

Euro screw # 6 x 14.5 mm (9/16")

PACKAGING: 1 box = 100 pcs

### Pozi driver



#### D2A7XCXCP


PACKAGING  
1 box = 100 pcs



**Accessories - For all Progressa, Progressa+ and Progressa+ Shelf slides****Ø 6 mm drill bit for rear hook****TDB7406R**

PACKAGING 1 box = 1 pc.

---

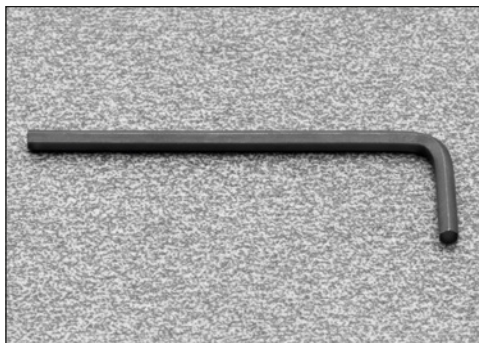**Hex key to lock the stop collar set screw onto the 6 mm drill bit****TLKEY332**

PACKAGING 1 box = 1 pc.

---

**Drill bit stop collar for 6 mm bit****TSC06MM**

PACKAGING 1 box = 1 pc.