



**Progressa+**  
**Push to open**

## Progressa+ - Full extension runner for 13 mm (1/2") to 16 mm (5/8") drawer material thickness

### Push to open




**PUSH: THE OPENING SYSTEM FOR HANDLE-LESS DRAWERS IS FULLY INTEGRATED IN THE RUNNER.**  
**A SLIGHT PRESSURE OF THE DRAWER FRONT IS ENOUGH FOR THE DRAWER TO OPEN.**

#### Product features

- 70 kg Dynamic load capacity
- Available in the full range of lengths from 350 mm to 750 mm in 50 mm increments
- Full extension with a synchronized mechanism
- Integrated Push opening system
- Elongated holes for depth and height adjustment
- Adjustable clips allow for easy drawer insertion and removal
- The drawer is latched when closed
- Frameless or blocked out face frame applications
- Tool free height adjustments + 2.5 mm
- Tool free depth adjustments +/- 3 mm
- Tool free side adjustments +/- 1.5 mm
- Meets and exceeds Ansi BHMA A156.9-2020 Grade 1 standard
- Optional:
  - tool free tilt adjustment +3 mm
  - Push Synchronizer
- 13 mm (1/2") to 16 mm (5/8") drawer material thickness
- Compatible with Lineabox drawers
- Finish: bright zinc-plated
- 100% Made in Italy

#### Dimensions

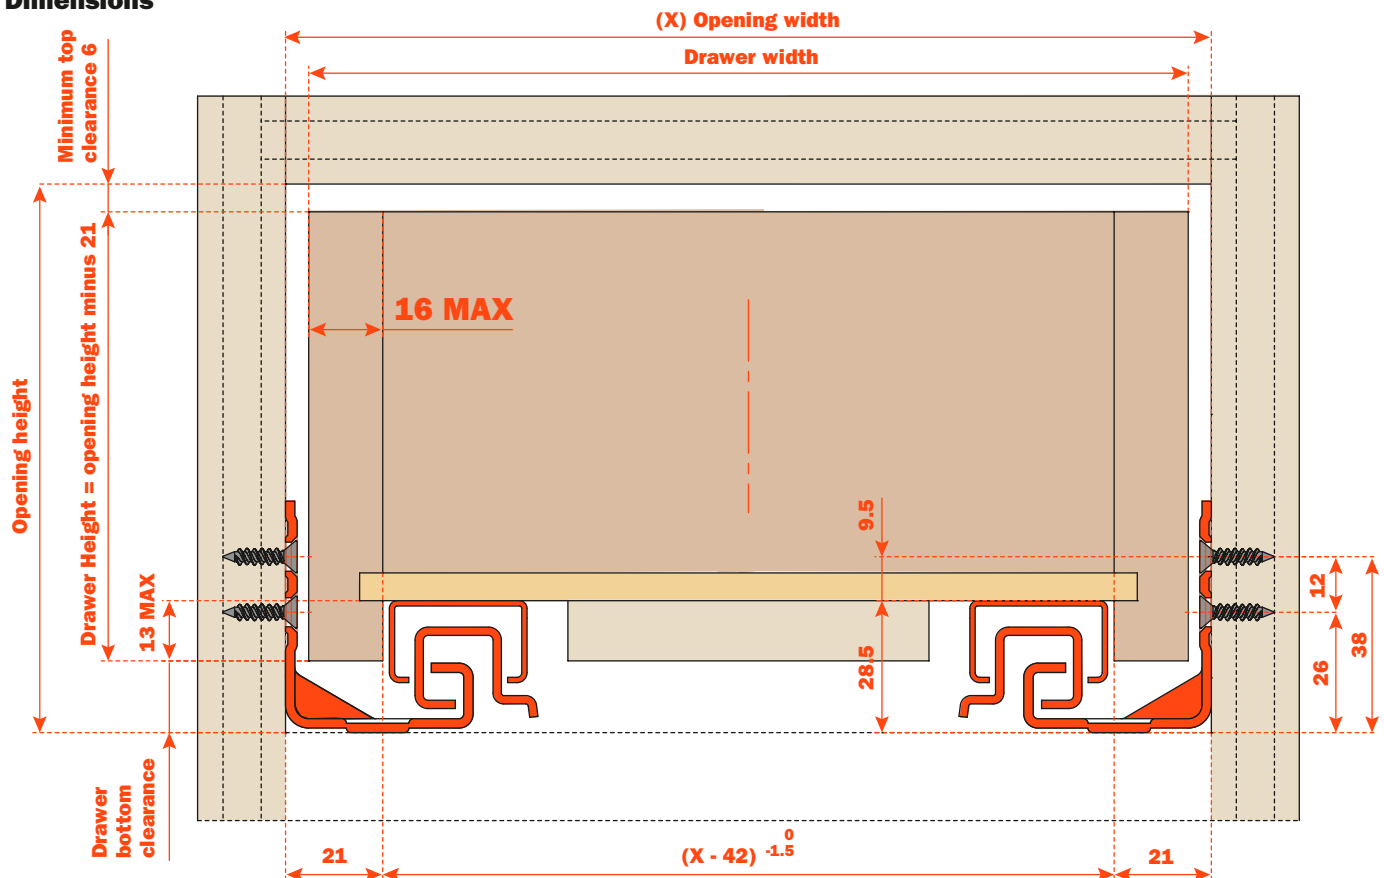

#### CALCULATION FORMULA FOR OUTSIDE DRAWER WIDTH

For drawer side thickness of	16 mm (5/8")	15 mm (19/32")	14 mm (9/16")	13 mm (1/2")	12 mm (7/16")
Deduct from inside cabinet width	10 mm (3/8")	12 mm (7/16")	14 mm (9/16")	16 mm (5/8")	18 mm (21/32")

Example: For a 15" inside cabinet width and a 5/8" thick drawer, subtract 3/8" from the inside width of 15" = 14-5/8" drawer width.


**Note:** Drawer side material thickness may vary. Make sure you take precise measurements when calculating outside drawer width using the table above. Inside drawer width must equal opening width minus 42 mm (1-21/32") for Progressa+ runners to align and function optimally.



## Part number



BASIC PART NUMBER	RUNNER LENGTH (LN) mm	MIN. DEPTH OF THE CABINET (PM) mm
<b>G7E6P350XXF6</b>	350	360
<b>G7E6P400XXF6</b>	400	410
<b>G7E6P450XXF6</b>	450	460
<b>G7E6P500XXF6</b>	500	510
<b>G7E6P550XXF6</b>	550	560
<b>G7E6P600XXF2</b>	600	610
<b>G7E6P650XXF2</b>	650	660
<b>G7E6P700XXF2</b>	700	710
<b>G7E6P750XXF2</b>	750	760

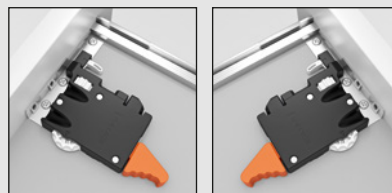

### **AFCGXX3B** Right and left

PACKAGING  
2 boxes = 100 pcs right and 100 pcs left