


# Silentia

**Hinges with adjustable integrated soft-close mechanism operated by twin silicone-oil dampers housed in the hinge cup.**

**The decelerating effect is adjusted by using a simple switch.**


**Bright nickel plated steel cup and arm.**  
**Dimensions of the Ø 35 mm cup.**

## Technical features

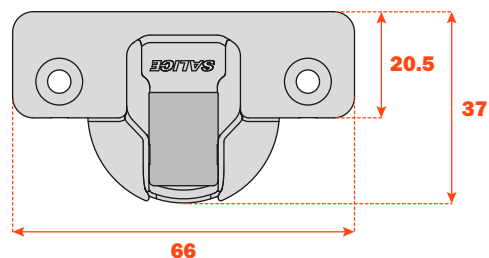

Constant "L" value of 1.3 mm (it does not change during side adjustment).

Approx. number of hinges required according to the door dimension and weight.

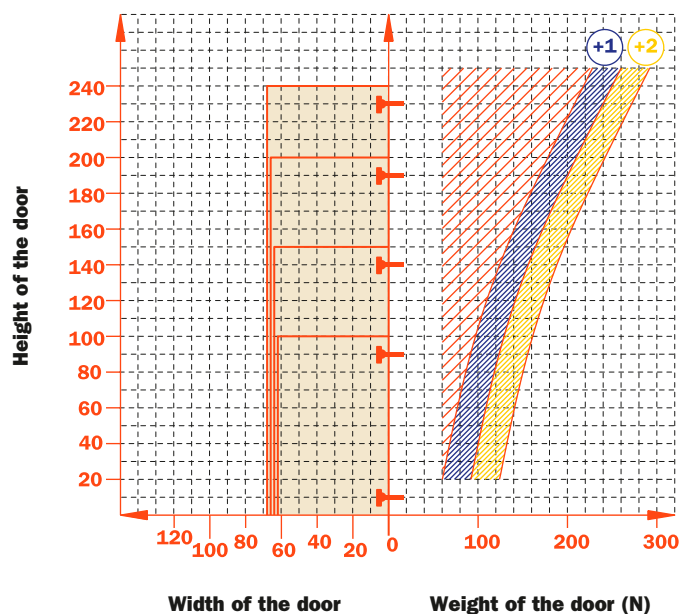

## Adjustments





Compensated side adjustment from -1.5 mm to +4.5 mm.  
 Height adjustment  $\pm 2$  mm.  
 Depth adjustment with Series 200 mounting plates +2.8 mm.  
 Depth adjustment with Domi snap-on mounting plates from -0.5 mm to +2.8 mm.  
 Anti-sliding safety stop.







## Mounting plates

Symmetrical and asymmetrical bright nickel plated steel or die-cast Series 200 mounting plates.  
 Snap-on assembly on Domi mounting plates.  
 Positioning with pre-determined stop on traditional Series 200 mounting plates.


N.B. : Use POZIDRIVE No. 2 screwdrivers for all screws.

Drillings and fixings

	 110°      155°	 110°      155°	 110°      155°			
Wood screw 	A	A	P	P	U	U

	 110°      155°	 110°      155°	 110°      155°			
Rapido 	6	6	7	7	2	2
Dowel 	B	B	R	R	W	W
Logica 	I	I	J	J	Q	Q

Use this table to identify the available drillings and fixings.  
Fill the third position of the hinge code number with the letter or the number corresponding to your choice. I.e.: C7\_6AE9.  
↑  
Fill this position with the chosen letter or number.

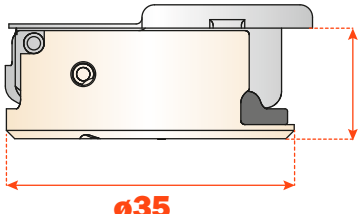


13.5

ø35

110° opening  
and complementary hinges

155° opening

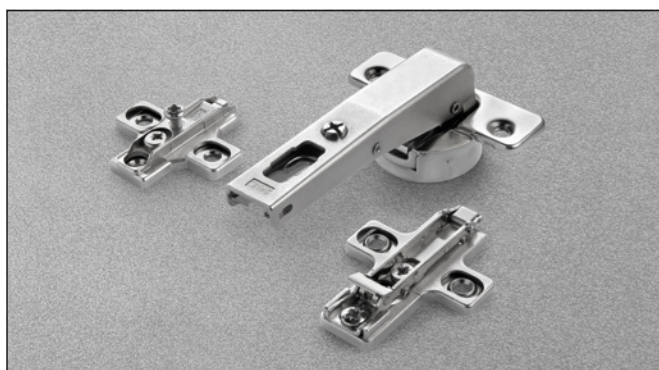

## Technical information

**Hinges with adjustable integrated soft-close mechanism operated by twin silicone-oil dampers housed in the hinge cup. The decelerating effect is adjusted by using a simple switch.**

### Crampon hinges.

**For cabinet sides with 37x32 mm standard drilling.**

**Hinges for min. 16 mm thick doors.**

**13.5 mm deep cup.**



110° opening.

Possible drilling distance on the door (K): from 3 to 6 mm.

Compatible with all traditional Series 200 mounting plates and with all Domi snap-on mounting plates.

**Packing** • Boxes 150 pcs. • Pallets 3.600 pcs.

Use the tables "Drillings and fixings" at page 39 to complete the code number of the desired hinge.


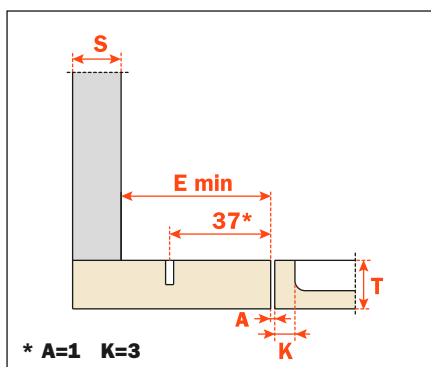
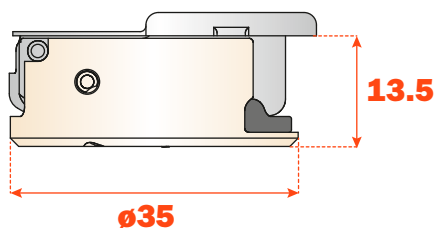


**C7\_6NE9AC**


### E min:

- 61 mm for Series 200 mounting plates.
- 70 mm for Domi snap-on mounting plates.
- 74 mm for Domi snap-on mounting plates with back cam.

Heights of mounting plates for every assembly.

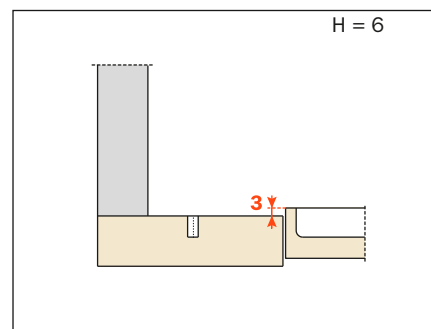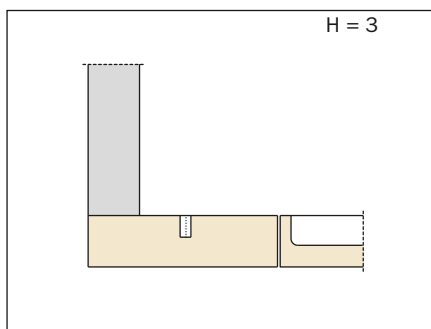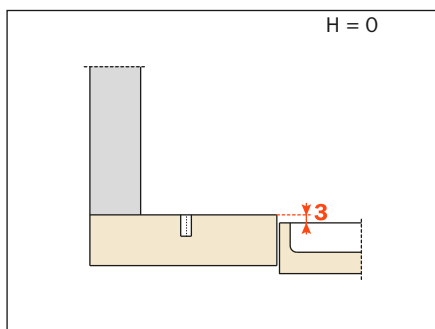

# Silentia<sup>+</sup> • Series 700 • Complementary hinges

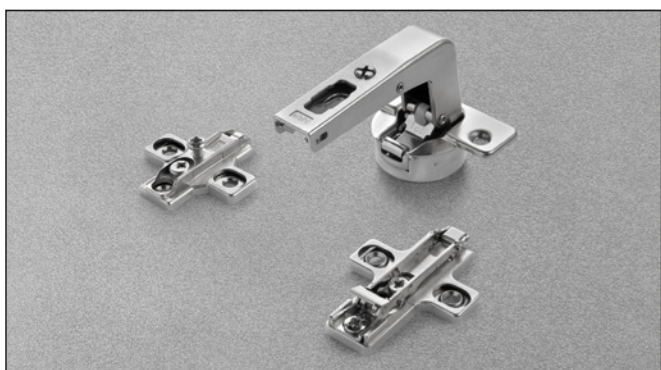

## Technical information

Hinges with adjustable integrated soft-close mechanism operated by twin silicone-oil dampers housed in the hinge cup. The decelerating effect is adjusted by using a simple switch.

### Long crampon hinges.

Hinges for min. 16 mm thick doors.

13.5 mm deep cup.



110° opening.

Possible drilling distance on the door (K): from 3 to 6 mm.

Compatible with all traditional Series 200 mounting plates and with all Domi snap-on mounting plates.

**Packing** • Boxes 150 pcs. • Pallets 3.600 pcs.

Use the tables "Drillings and fixings" at page 37 to complete the code number of the desired hinge.


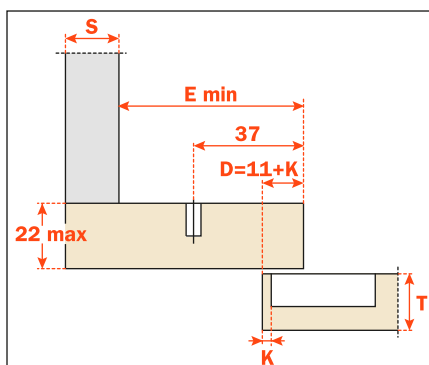
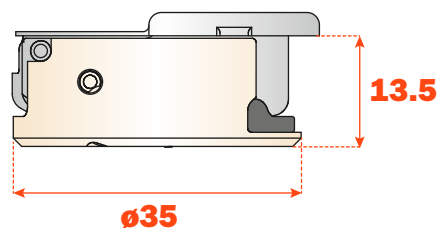



## C7\_6NE9AM

### E min:

- 61 mm for Series 200 mounting plates.
- 70 mm for Domi snap-on mounting plates.
- 74 mm for Domi snap-on mounting plates with back cam.

Heights of mounting plates for every assembly.

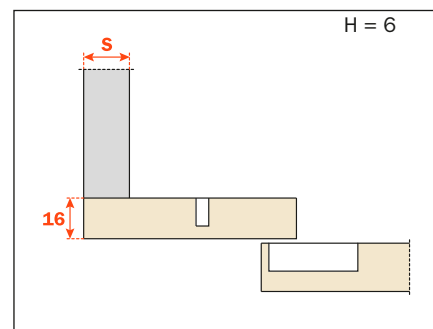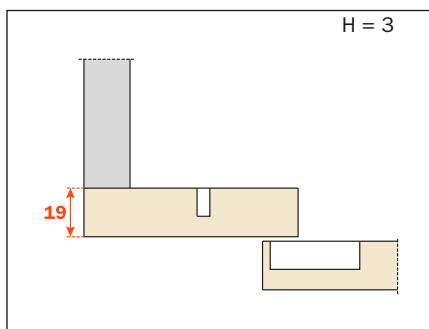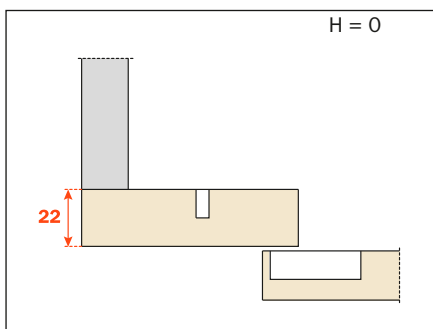

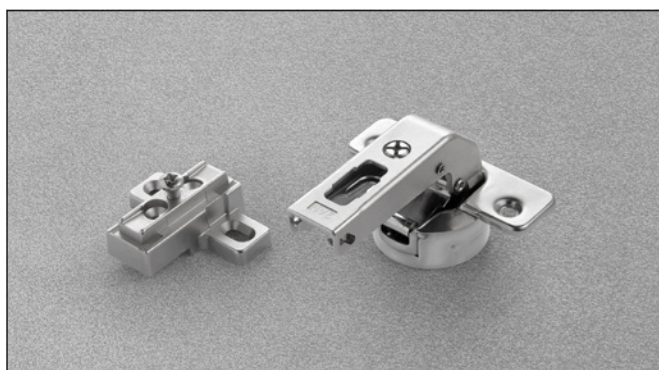

## Technical information

**Hinges with adjustable integrated soft-close mechanism operated by twin silicone-oil dampers housed in the hinge cup. The decelerating effect is adjusted by using a simple switch.**

### Crampon hinges.

**For smaller spaces with 15x32 mm drilling.**

**Hinges for min. 16 mm thick doors.**

**13.5 mm deep cup.**

110° opening.



Possible drilling distance on the door (K): from 3 to 6 mm.

Compatible with all traditional Series 200 mounting plates, 28x32 mm drilling.

**NOT COMPATIBLE** with Domi snap-on mounting plates.

**Packing** • Boxes 150 pcs. • Pallets 3.600 pcs.

Use the tables "Drillings and fixings" at page 37 to complete the code number of the desired hinge.

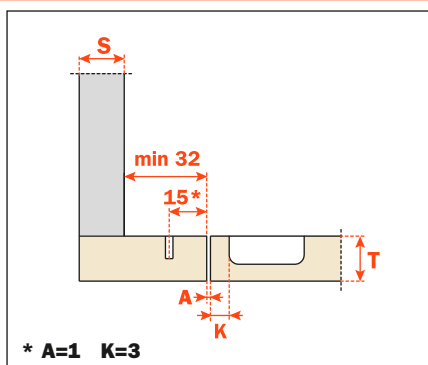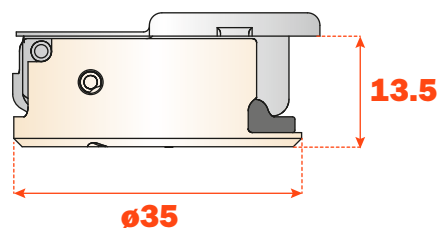

**C7\_6NE9**

Heights of mounting plates for every assembly.

