

Silentia


• Series 200 for thicker doors

Technical features

Hinges with adjustable integrated soft-close mechanism operated by twin silicone-oil dampers housed in the hinge cup.


The decelerating effect is adjusted by using a simple switch.

Bright nickel plated steel cup and arm.
Dimensions of the Ø 35 mm cup.

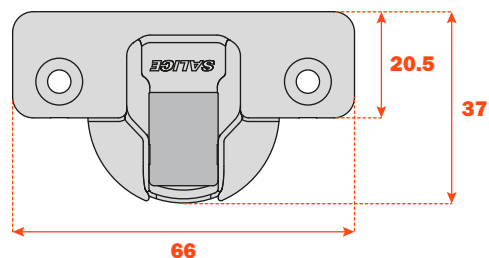

Constant "L" value of 1.3 mm (it does not change during side adjustment).

Approx. number of hinges required according to the door dimension and weight.

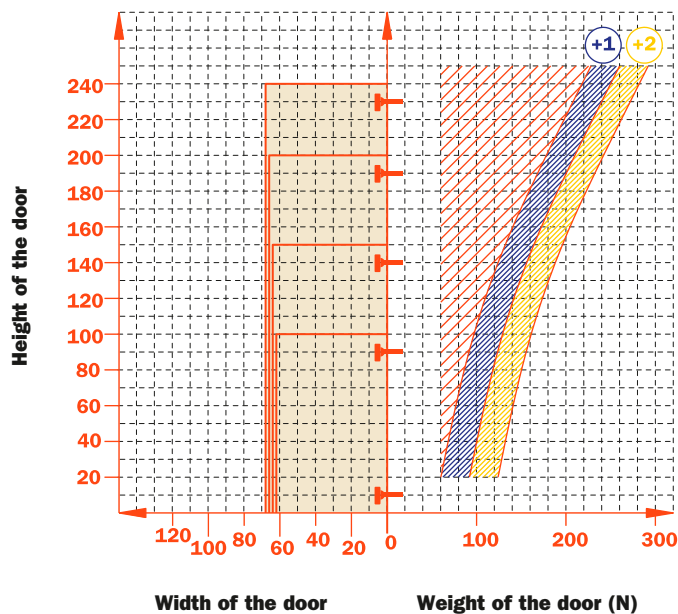

Adjustments

Compensating side adjustment from -1.5 mm to +4.5 mm.
Height adjustment ± 2 mm.
Depth adjustment with Series 200 mounting plates +2.8 mm.
Depth adjustment with Domi snap-on mounting plates from -0.5 mm to +2.8 mm.
Anti-sliding safety stop.

Mounting plates

Symmetrical and asymmetrical bright nickel plated steel or die-cast Series 200 mounting plates.
Snap-on assembly on Domi mounting plates.
Positioning with pre-determined stop on traditional Series 200 mounting plates.

N.B. : Use POZIDRIVE No. 2 screwdrivers for all screws.

Drillings and fixings


Wood screw		94°	155°	A	A	U

Rapido		6	6	7	7	2	2
Dowel		B	B	R	R	W	W
Logica		I	I	J	J	Q	Q


Use this table to identify the available drillings and fixings.

Fill the third position of the hinge code number with the letter or the number corresponding to your choice. I.e.: C2_BAE9.

↑
Fill this position with the chosen letter or number.

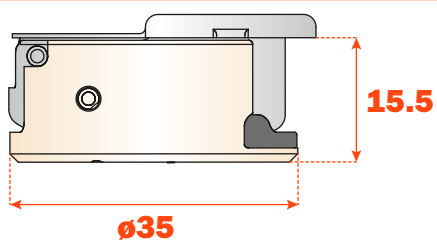


94° opening and complementary hinges

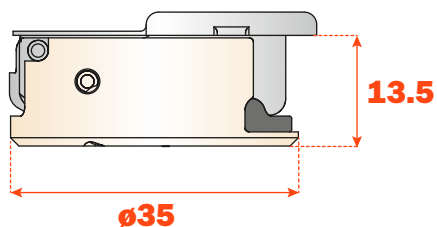

155° opening

Silentia+ • Series 200 for thicker doors • Complementary hinges

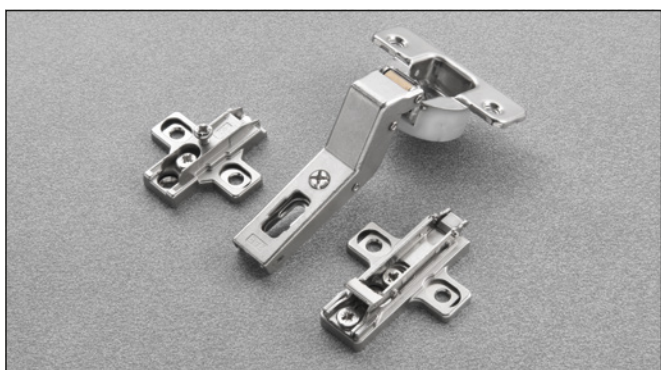

Technical information

Hinges with adjustable integrated soft-close mechanism operated by twin silicone-oil dampers housed in the hinge cup. The decelerating effect is adjusted by using a simple switch.


For wooden doors with positive angled assembly.
Hinges for min. 18 mm thick doors.
15.5 mm deep cup.

94° opening.
 Possible drilling distance on the door (K): from 3 to 9 mm.
 Compatible with all traditional Series 200 mounting plates and with all Domi snap-on mounting plates.


Packing • Boxes 150 pcs. • Pallets 3.600 pcs.

The solution of assembly problems where doors are mounted at a positive angle requires the verification of drilling distances by a practical trial.
 Please do not hesitate to consult our technical support department for assistance.

Use the tables "Drillings and fixings" at page 21 to complete the code number of the desired hinge.

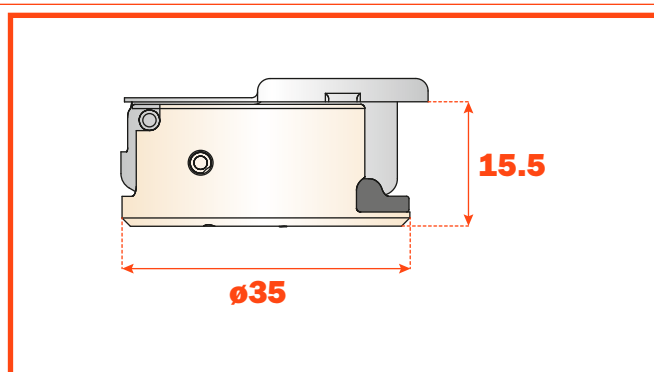


Arm 15°

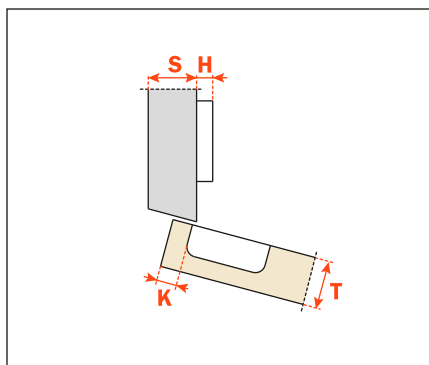


C2_BZE9

Arm 24°

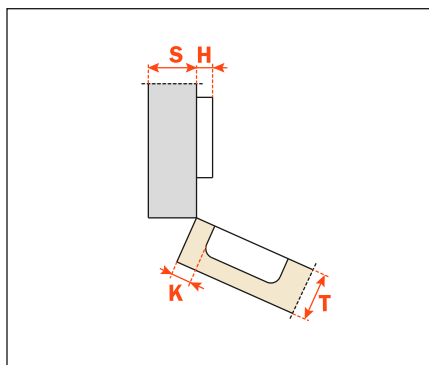


C2_BUE9

Arm 30°

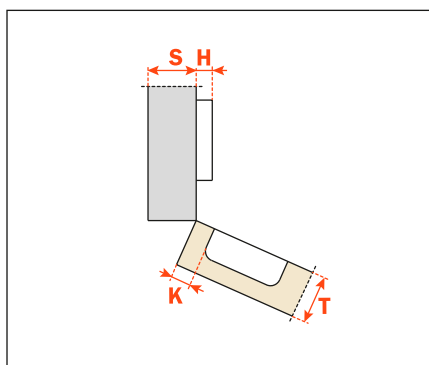


C2_BEE9

Arm 30°

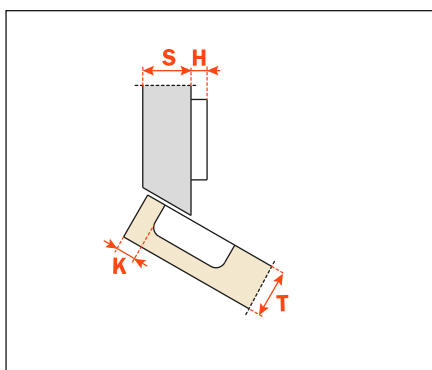


C2_BTE9

Arm 37°

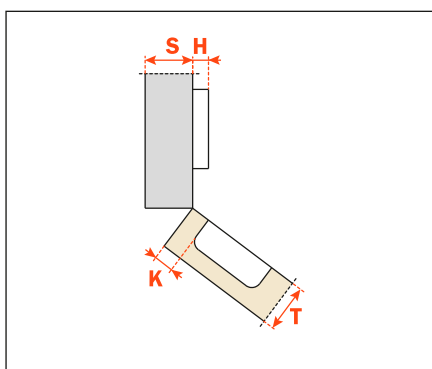


C2_BKE9

Arm 45°

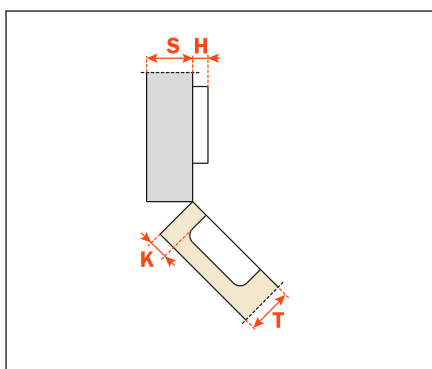


C2_BME9

Arm 45°

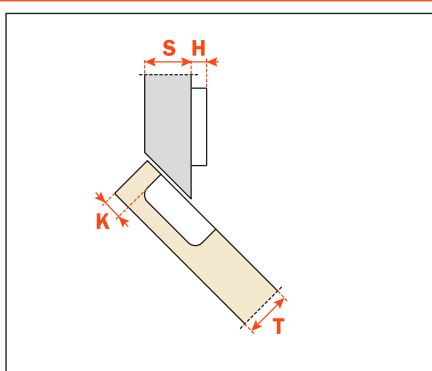

C2_BVE9

Arm 45°

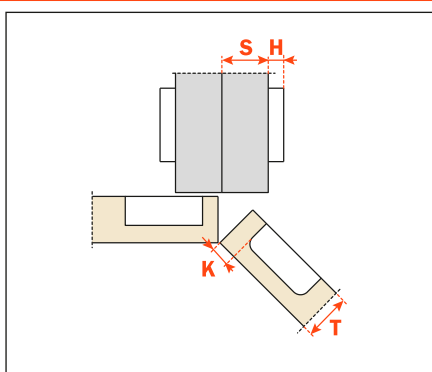

C2_BME9AC