


# Silentia+ • For metal profiles

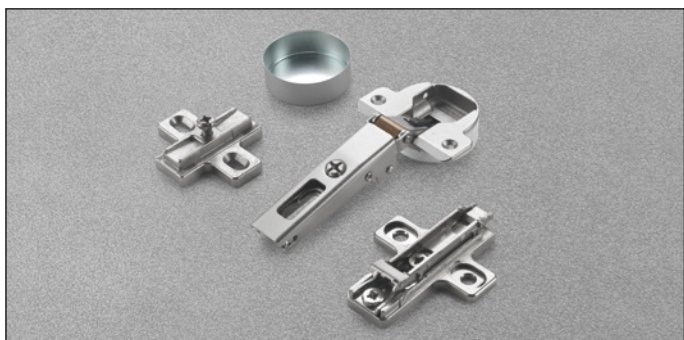

## Technical information

**Hinges with adjustable integrated soft-close mechanism operated by twin silicone-oil dampers housed in the hinge cup. The decelerating effect is adjusted by using a simple switch.**


**Hinges specially developed for use with metal profiles.**


105° opening.

We recommend the use of countersunk flat head self tapping screws  $\varnothing 2.9 \times 6.5$  UNI 6955 DIN 7982 to fix C1Z6 hinges.


Compatible with all traditional Series 200 mounting plates and with all Domi snap-on mounting plates.


Full overlay / A crank - **0 mm**

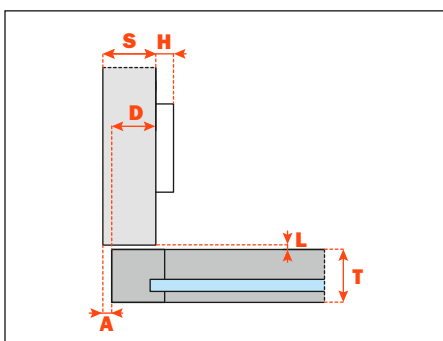


Attachment	Nickel
 $\varnothing 2.9 \times 6.5$ UNI 6955 DIN 7982	C1Z6AE9


1/2" overlay / D crank - **5 mm**

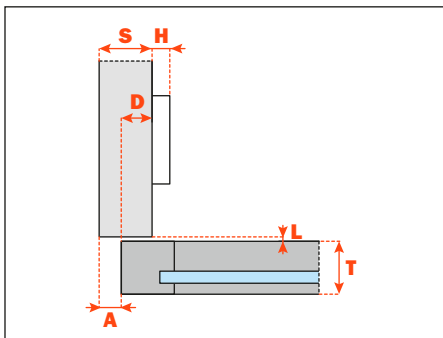


Attachment	Nickel
 $\varnothing 2.9 \times 6.5$ UNI 6955 DIN 7982	C1Z6DE9


Half overlay / G crank - **9 mm**

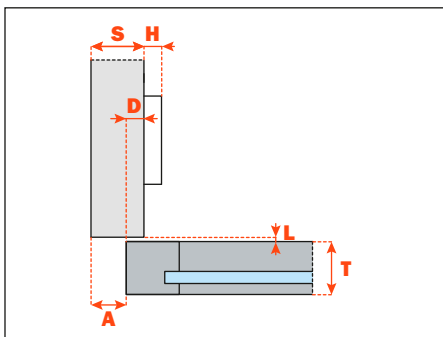

Attachment	Nickel
 $\varnothing 2.9 \times 6.5$ UNI 6955 DIN 7982	C1Z6GE9



Inset / P crank - **17 mm**

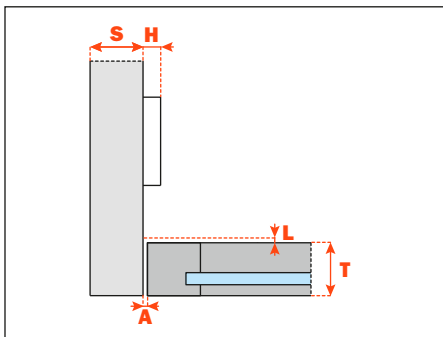

Attachment	Nickel
 $\varnothing 2.9 \times 6.5$ UNI 6955 DIN 7982	C1Z6PE9

## Drilling of the metal profile

Countersunk flat head self tapping screws  $\varnothing 2.9 \times 6.5$  UNI 6955 - DIN 7982

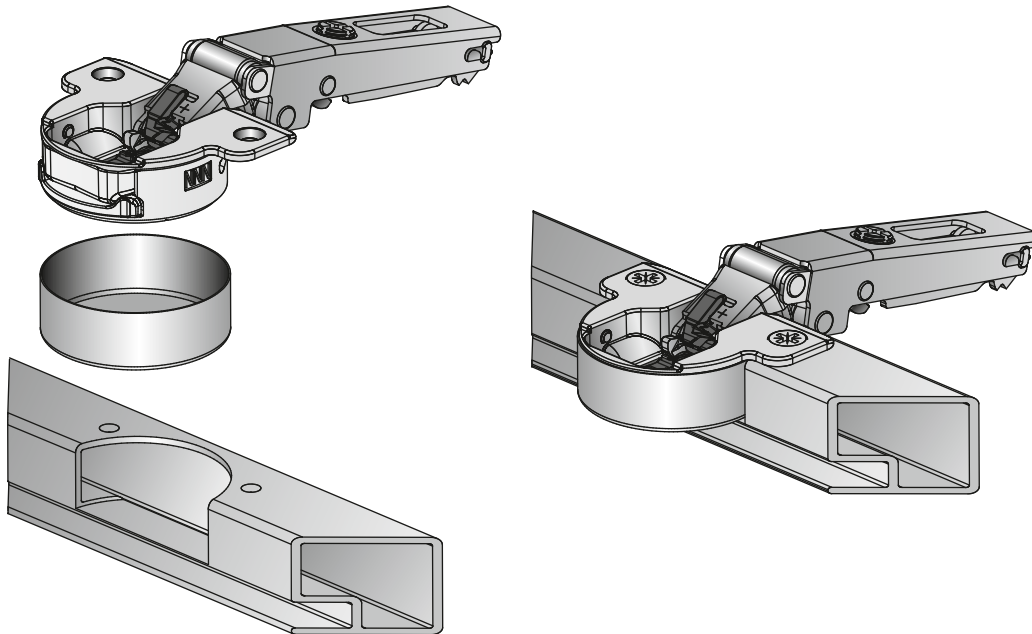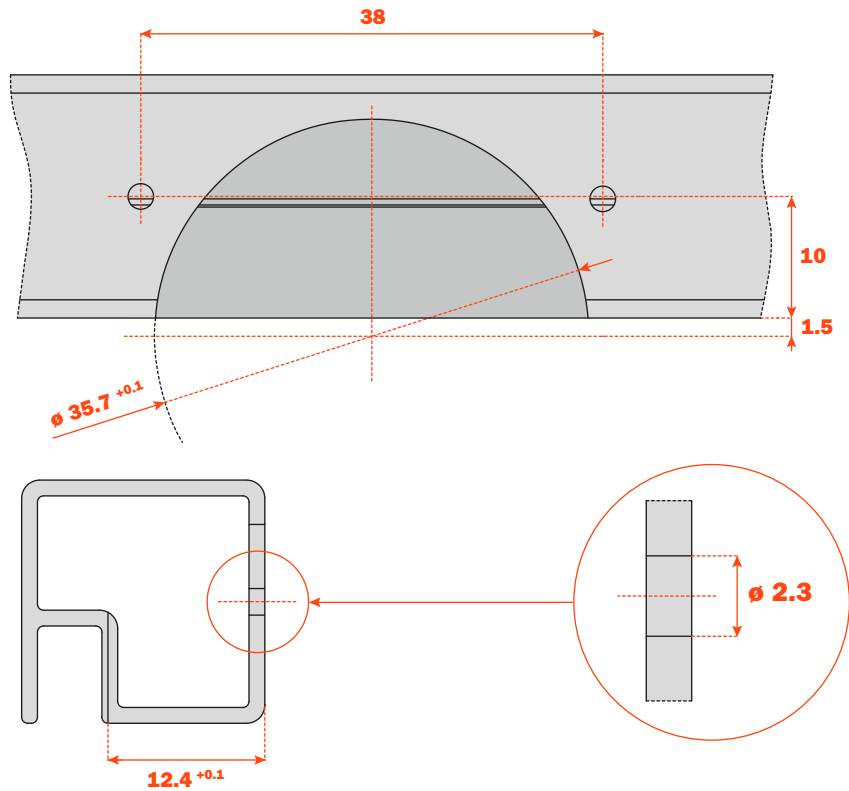

### D1Z6HSK

Fancy cover for hinge  
(should be ordered separately)