



The Series 200 make up an integrated system of hinges developed to provide a solution to any situation involving concealed hinges.

Bright nickel plated steel cup and arm.
Dimensions of the \varnothing 35 mm cup.

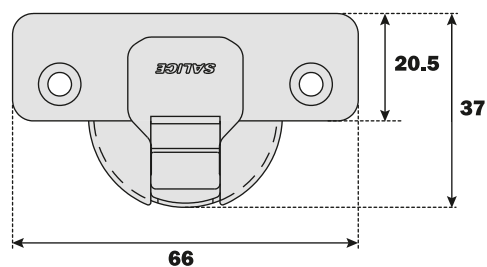

Constant "L" value of 0.7 mm (it does not change during side adjustment).

Approx. number of hinges required according to the door dimension and weight.

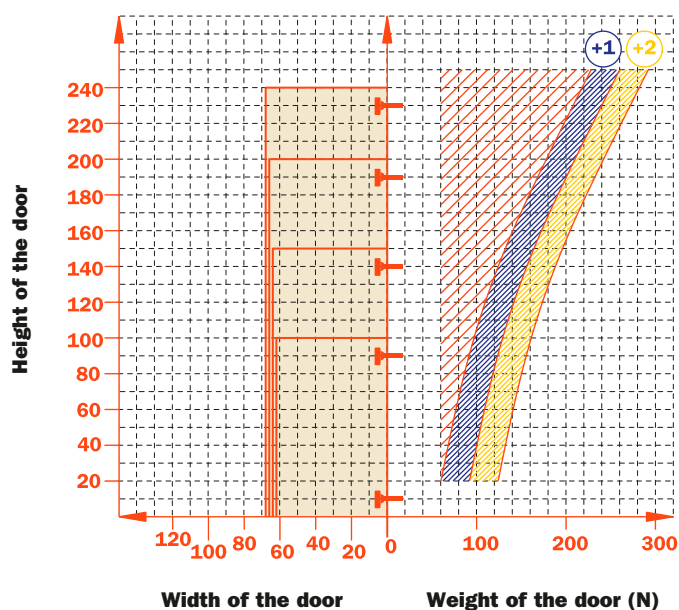

Adjustments

Compensating side adjustment from - 1.5 to + 4.5 mm.
Height adjustment \pm 2 mm.
Depth adjustment with Series 200 mounting plates + 2.8 mm.
Depth adjustment with Domi snap-on mounting plates from - 0.5 mm to + 2.8 mm.
Anti-sliding safety stop.

Mounting plates

Symmetrical and asymmetrical bright nickel plated steel or die-cast Series 200 mounting plates.
Snap-on assembly on Domi mounting plates.
Positioning with pre-determined stop on traditional Series 200 mounting plates.

N.B. : Use POZIDRIVE No. 2 screwdrivers for all screws.




Wood screw		94° 110° 155°	94° 110° 155°
	A A A	P P P	U U U

Rapido		94° 110° 155°	94° 110° 155°
	6 6 6	7 7 7	2 2 2
Dowel		B B B	R R R
	W W W		
Logica		I I I	J J J
	Q Q Q		

Use this table to identify the available drillings and fixings.
Fill the third position of the hinge code number with the letter or the number corresponding to your choice. I.e.: C2_PA99.

↑
 Fill this position with the chosen letter or number.

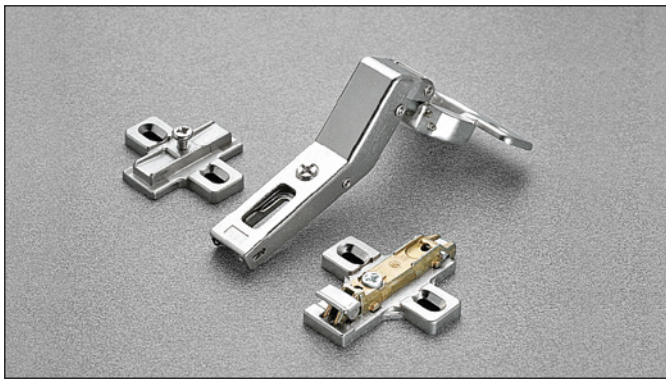

Technical information

Push hinges are reverse-sprung so that the door self-opens when the release device is activated.

Hinges for wooden doors with positive angled assembly.

11 mm deep metal cup.

94° opening.

Possible drilling distance on the door (K): from 3 to 9 mm.

Compatible with all traditional Series 200 mounting plates and with all Domi snap-on mounting plates.


Packing

Boxes 150 pcs.


Pallets 3.600 pcs.

The solution of assembly problems where doors are mounted at a positive angle requires the verification of drilling distances by a practical trial. Please do not hesitate to consult our technical support department for assistance.

Use the tables "Drillings and fixings" at page 27 to complete the code number of the desired hinge.

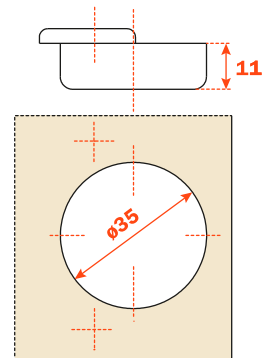


Arm 15°

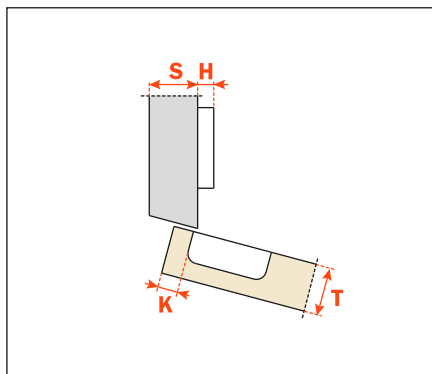


C2_VZ99

Arm 24°

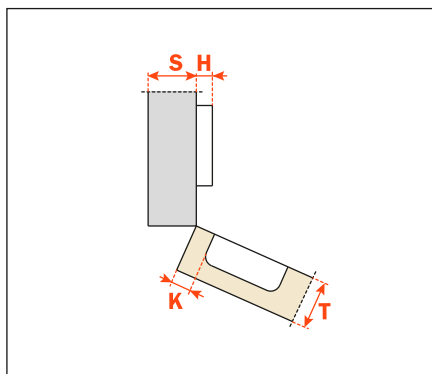


C2_VU99

Arm 30°

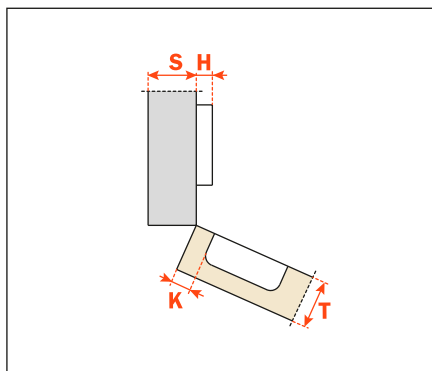


C2_VE99

Arm 30°

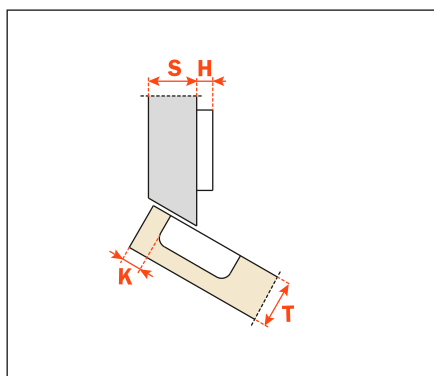


C2_VT99

Arm 37°

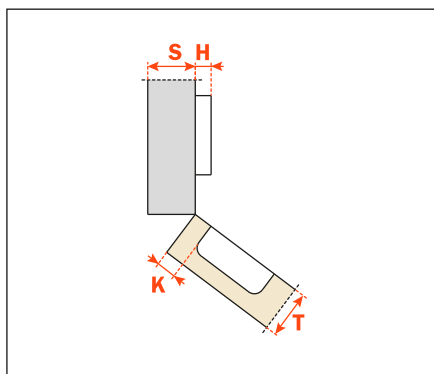


C2_VK99

Arm 45°

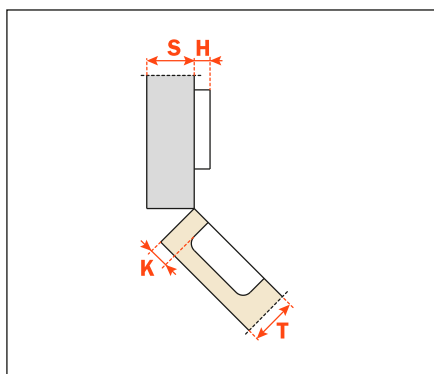


C2_VM99

Arm 45°

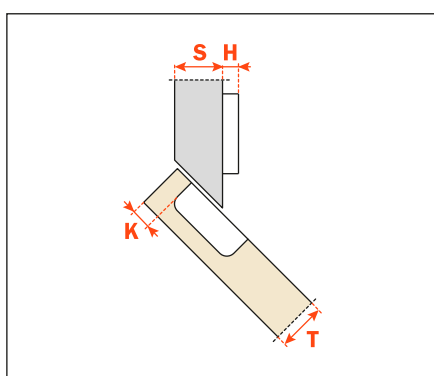

C2_VV99

Arm 45°

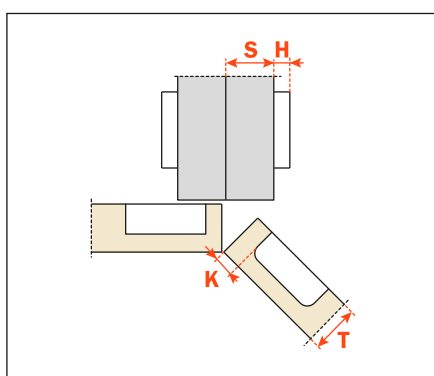

C2_VM99AC