



Accessories

Air - Packing

INDUSTRIAL PACKING



Closing/Opening action	Nickel-plated finish	Titanium finish	Industrial packing
Soft close	CEL6DE9XXI	CEL6DE6XXI	Boxes 100 pcs. Pallets 2.400 pcs. Fixing screws included*
*Push	CELPD99XXI	CELPD66XXI	
Unsprung hinge	CEL4D99XXI	CEL4D66XXI	

* Use the magnetic release devices (see pages 16 and 17)

Closing/Opening action	Nickel-plated finish	Titanium finish	Industrial packing
Soft close	CEL6SE9XXI	CEL6SE6XXI	Boxes 100 pcs. Pallets 2.400 pcs. Fixing screws included
*Push	CELP9S99XXI	CELP9S66XXI	
Unsprung hinge	CEL4S99XXI	CEL4S66XXI	

* Use the magnetic release devices (see pages 16 and 17)

DOOR-SET PACKING



Closing/Opening action	Nickel-plated finish	Titanium finish	Door-set packing
Soft close	CEL6XE9XXV	CEL6XE6XXV	Boxes 72 bags Pallets 864 bags 1 bag contains 1 door-set of hinges and fixing screws
*Push	CELPX99XXV	CELPX66XXV	


* Use the magnetic release devices (see pages 16 and 17)

Accessories for aluminium frame




Corner connectors for the frame assembly of the doors and the fixing of the hinge.

Part number	Description	Packing
DEL6BSFV02	For doors with minimum overlay on the top of 16.5 mm.	Boxes of 25 bags • 1 bag contains: 4 corner connectors and assembly screws
DEL5BSFV02	For doors with minimum overlay on the top of 15 mm.	Boxes of 25 bags • 1 bag contains: 4 corner connectors and assembly screws

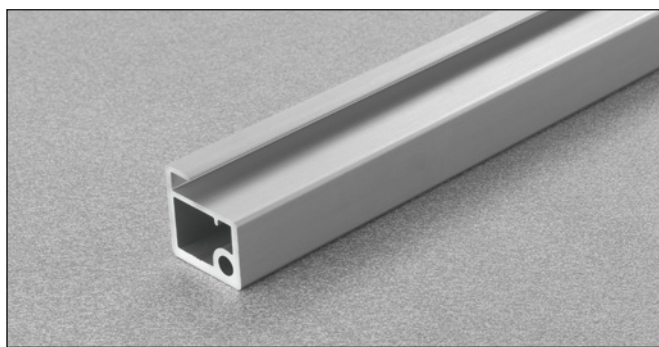


Aluminium door profile, width 26 mm, for glass insertion (4 mm).

Part number	Packing	Length
DEL6LP300P	12 lengths in anodised aluminium	3 metres
DEL6LP300T	12 lengths in Titanium finish	3 metres

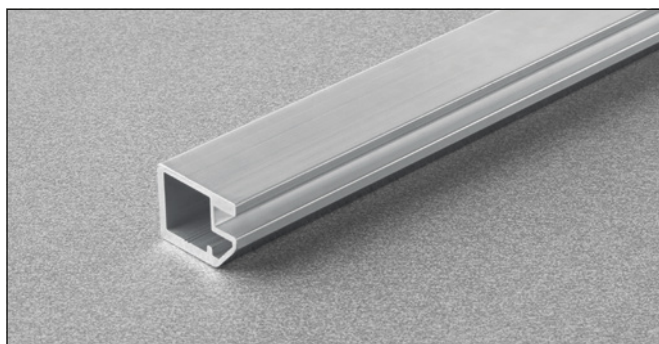

Aluminium door profile, width 19 mm, for glass insertion (4 mm).

Part number	Packing	Length
DEL9LP300P	14 lengths in anodised aluminium	3 metres
DEL9LP300T	14 lengths in Titanium finish	3 metres

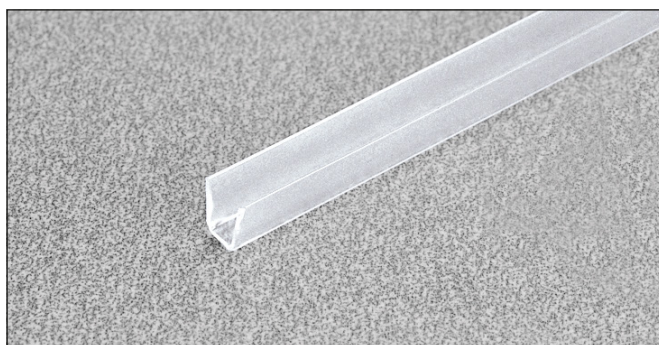



Gasket for glass.

Part number	Packing	Length
D206AG3000	120 gaskets	3 metres

Air - Aluminium frame assembly



The profiles which make up the door must be cut and the ends mitred at 45°, and milled for the insertion of the corner connectors.

Insert the corner connectors into the profile and fix them with the screws provided.

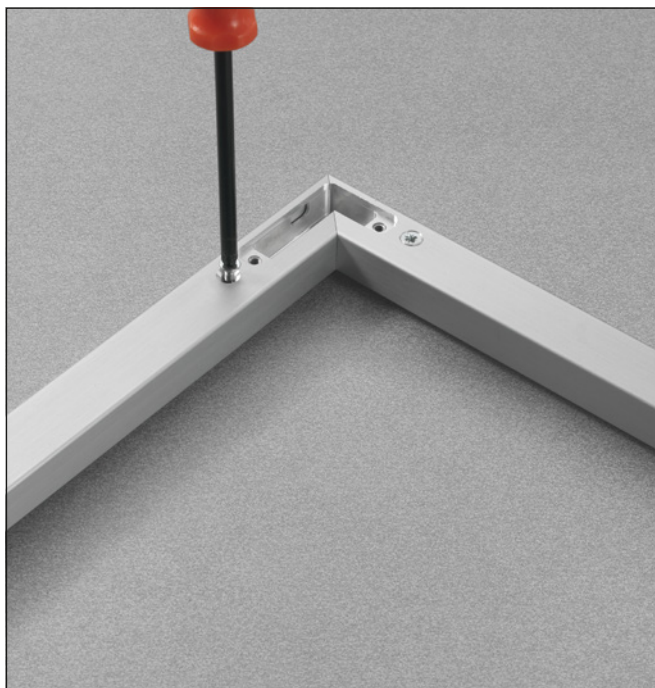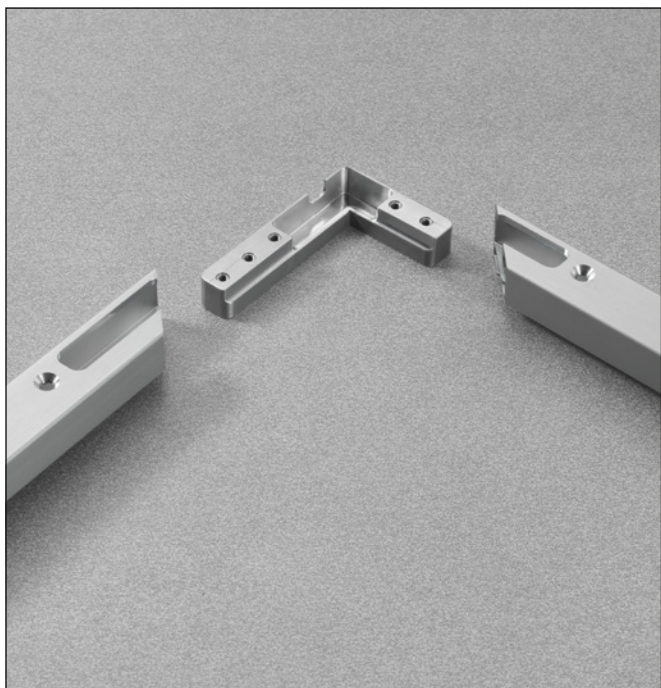


Insert the hinges into the recesses.

Fix with the screws provided.

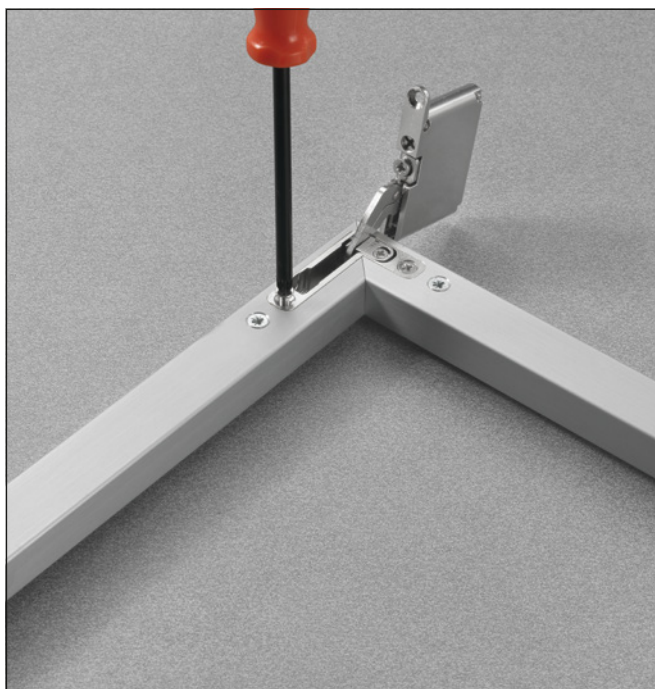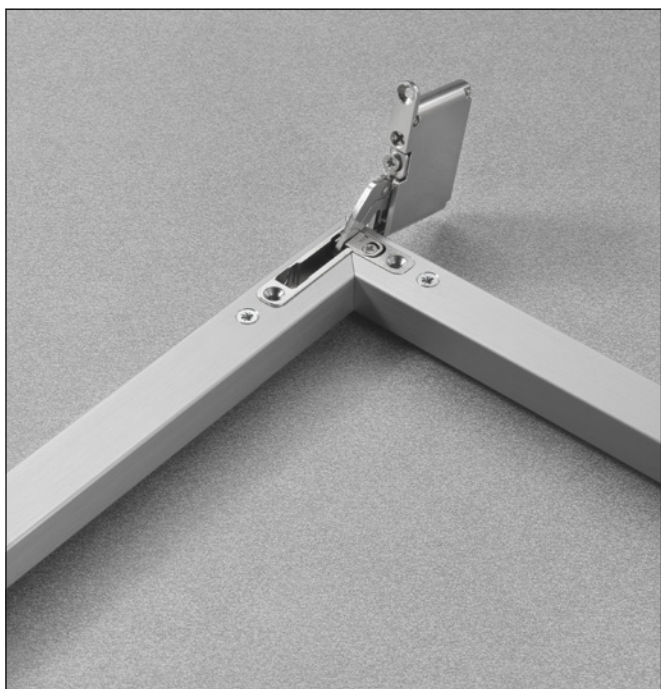

Accessories

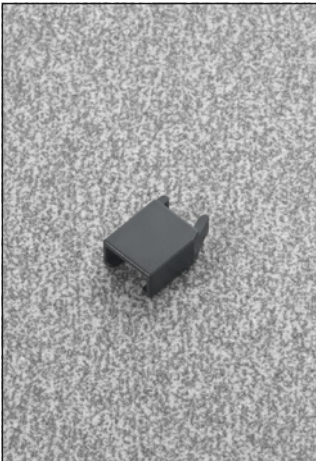

Restrictor to reduce opening angle to 92 deg.

Part number	Packing
SEL637X3	Boxes of 500 pieces



Holders for cup, to be inserted into the door .
They allow an easier insertion of the hinge as well as hiding any surface imperfections caused by the machining of the door.



Part number	Packing
SELX86X6XD	Boxes of 100 pieces
SELX86X6XS	Boxes of 100 pieces



Holders for arm, to be inserted and attached into the top or bottom panel of the cabinet to provide additional support for Air when it is used in thinner materials as well as hiding any surface imperfections caused by the machining of the cabinet.

Part number	Packing
SELX77X9	Boxes of 36 bags • 1 bag contains: 2 holders 2 fixing screws for hinges
SELX77X6	Boxes of 36 bags • 1 bag contains: 2 holders 2 fixing screws for hinges