



Hinges for thinner door.

Bright nickel plated steel cup and arm.
Dimensions of the Ø 35 mm cup.

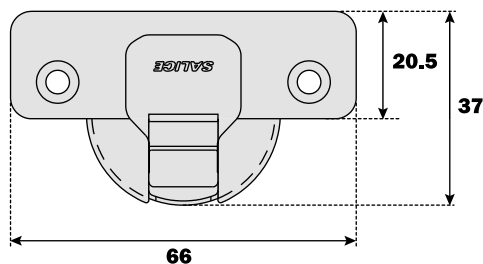

Constant "L" value of 0.7 mm (it does not change during side adjustment).

Approx. number of hinges required according to the door dimension and weight.

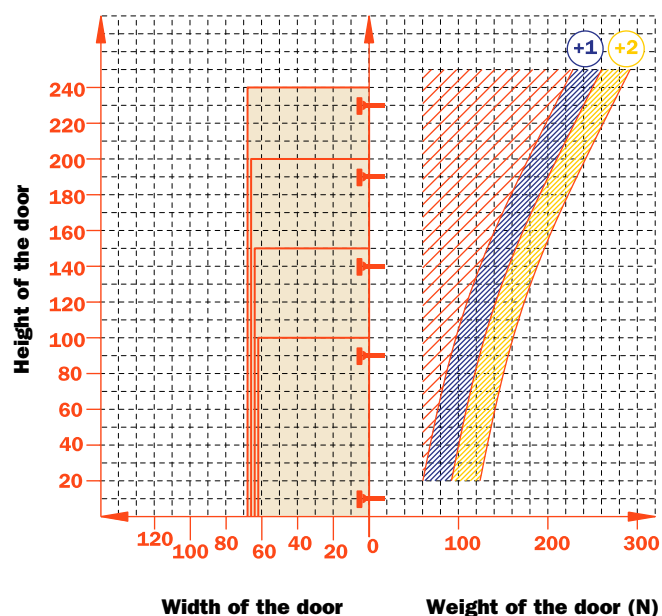

Adjustments

Compensated side adjustment from -1.5 mm to +4.5 mm.
Height adjustment ± 2 mm.
Depth adjustment with Series 200 mounting plates +2.8 mm.
Depth adjustment with Domi snap-on mounting plates from -0.5 mm to +2.8 mm.
Anti-sliding safety stop.

Mounting plates

Symmetrical and asymmetrical bright nickel plated steel or die-cast Series 200 mounting plates.
Snap-on assembly on Domi mounting plates.
Positioning with pre-determined stop on traditional Series 200 mounting plates.

N.B. : Use POZIDRIVE No. 2 screwdrivers for all screws.

Drillings and fixings

Wood screw	A	A	
	P	P	
	U	U	

Dowel	B	B	

Use this table to identify the available drillings and fixings.

Fill the third position of the hinge code number with the letter or the number corresponding to your choice. I.e.: C1_6A99.

↑
Fill this position with the chosen letter or number.



Technical information

**Hinges for wooden doors with positive angled assembly.
For min. 10 mm thick doors.**

8mm deep metal cup.
105° opening.
Possible drilling distance on the door (K): from 3 to 6 mm.
Compatible with all traditional Series 200 mounting plates and with all Domi snap-on mounting plates.


Packing

Boxes 150 pcs.
Pallets 3.600 pcs.


CA sprung hinge

The solution of assembly problems where doors are mounted at a positive angle requires the verification of drilling distances by a practical trial. Please do not hesitate to consult our technical support department for assistance.

Use the tables "Drillings and fixings" at page 3 to complete the code number of the desired hinge.

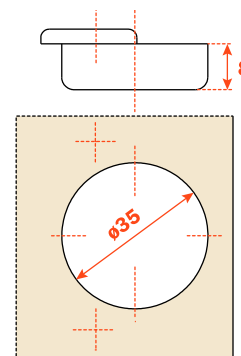


Arm **15°**

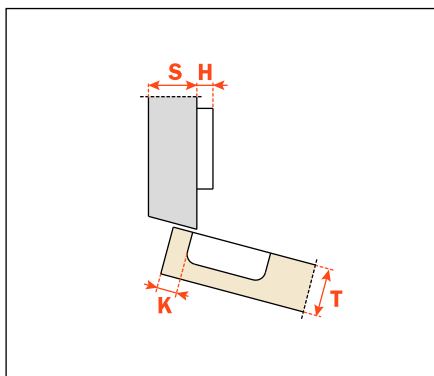


CA - C1_6Z99

Arm **24°**

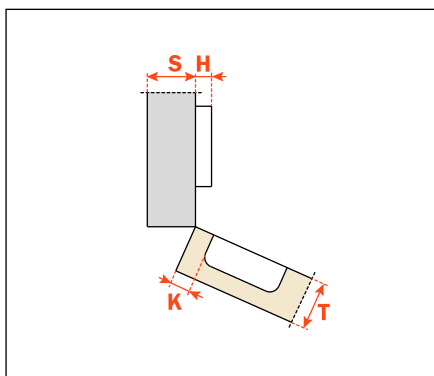


CA - C1_6U99

Arm **30°**

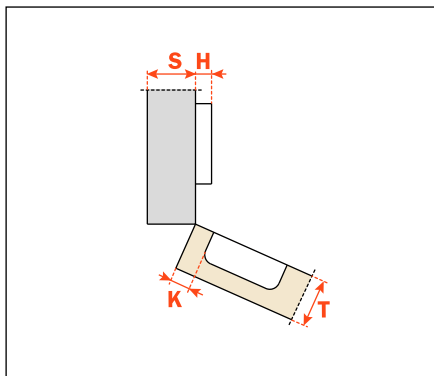


CA - C1_6E99

Arm 30°

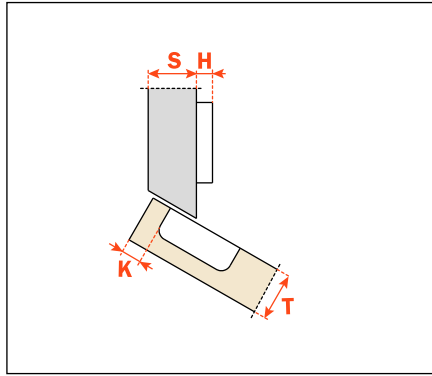


CA - C1_6T99

Arm 37°

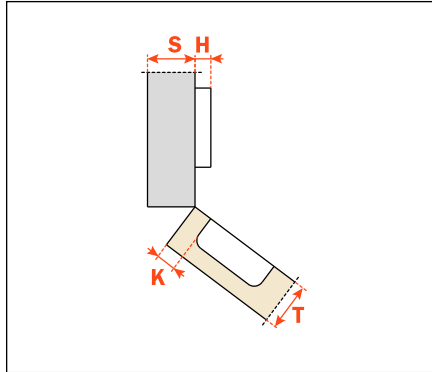


CA - C1_6K99

Arm 45°

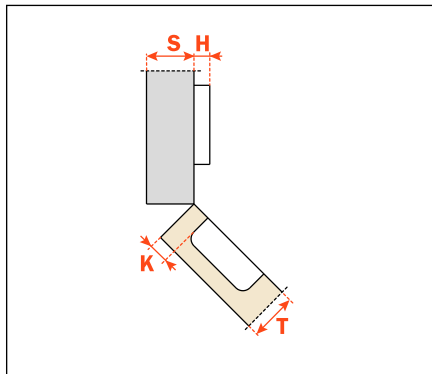


CA - C1_6M99

Arm 45°

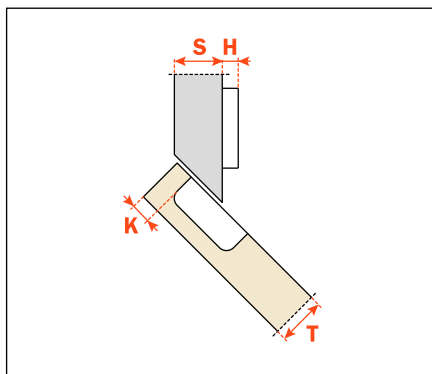

CA - C1_6V99

Arm 45°

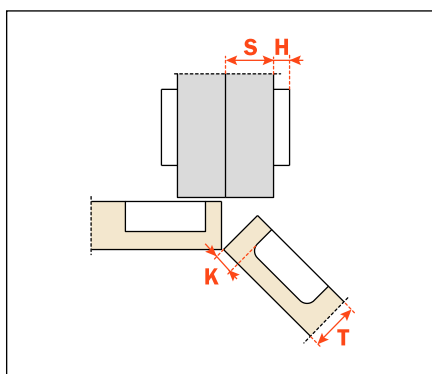

CA - C1_6M99AC