



Technical information

Hinges for doors with positive angled assembly and crampon hinges.

Hole diameter 26 mm.
 94° opening.
 For use with glass from 4 mm to 6 mm thickness.
 Possible drilling distance on the door (K): from 5.5 to 6.5 mm.
 Compatible with all traditional Series 200 mounting plates.
NOT COMPATIBLE with Domi snap-on mounting plates.


Packing

Boxes 300 pcs.
 Pallets 7.200 pcs.


The solution of assembly problems where doors are mounted at a positive or negative angle requires the verification of drilling distances by a practical trial. Please do not hesitate to consult our technical support department for assistance.

CA sprung hinge

Applications with doors set at any angle between -7.5° to +70° are possible by combining the appropriate hinge and mounting plate.




Arm 30°

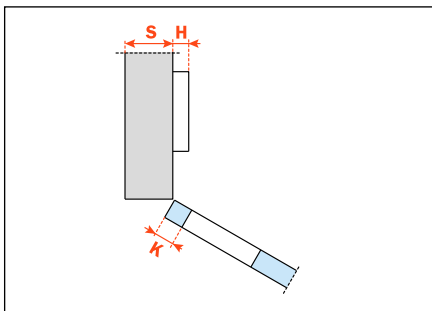


CA - C6C7E39

Arm 45°

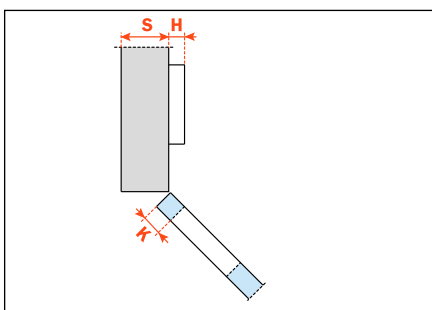

CA - C6C7M39

Crampon

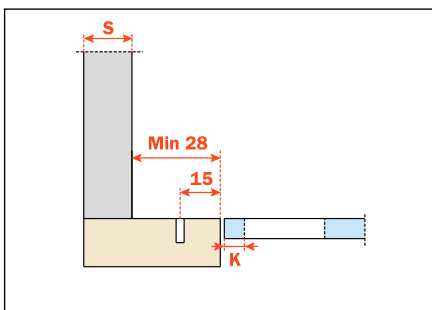

Crampon hinges. To be use only with Series 200 mounting plates for traditional assembly and drilling 28x32 mm.

CA - C6C7N39

Heights of mounting plates for every assembly.

