

1 Cam-assisted door insertion and extraction movement.

2 Magnetic buffer for soft insertion.

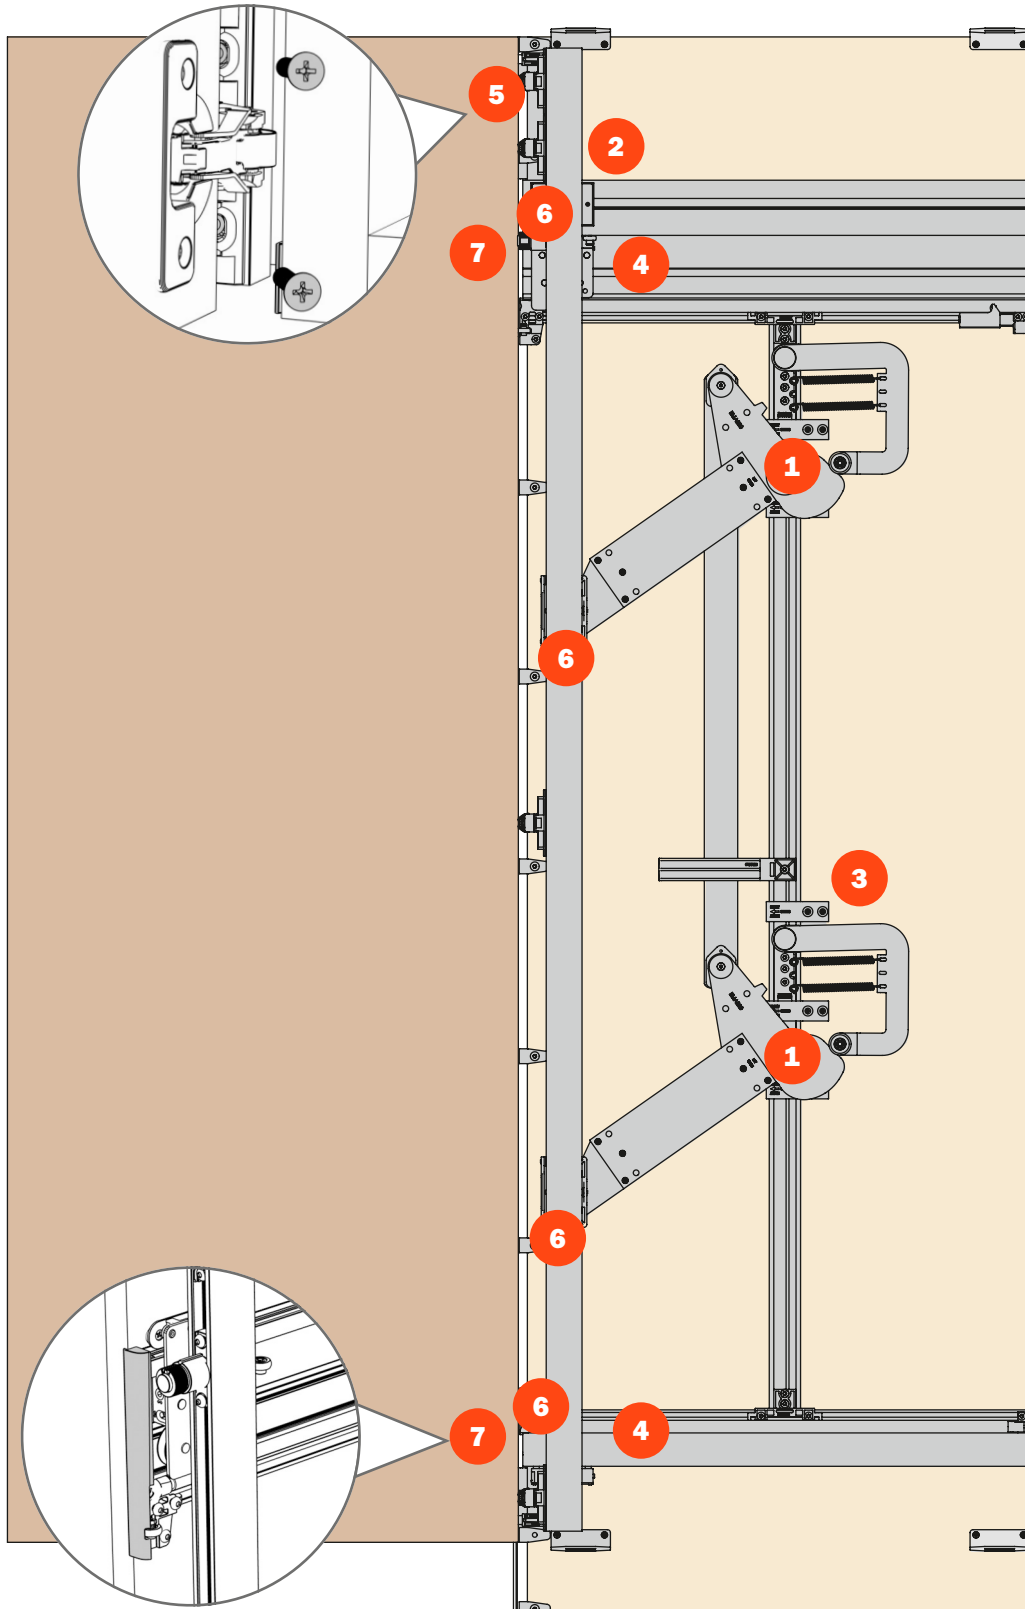
3 Slide-in installation to facilitate installation and removal of the mechanism from the front.

4 Sliding carriage.

5 Quick coupling hinges.

6 All adjustments are accessible from the front of the cabinet.

7 Profile cover caps (included in the standard versions).




## Exedra - Standard


This solution offers a great deal of flexibility to the customer. The customer cuts the profile sections to their desired length and fixes together its individual components. A cam-carriage connection must be ordered together with the mechanism kit according to the usable structure depth (LPU) and the door height (TH). Refer to the installation manual for the cutting and assembly operations.

The locating clips and positioning stops ensure a fast and secure assembly and removal from the cabinet without the need to access the side of the cabinet.


### Calculation of the min. structure dimensions





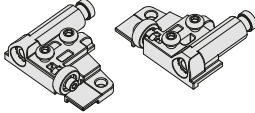



















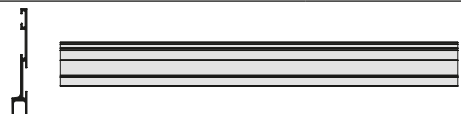


Usable structure depth (LPU - mm)													
		400 - 500		501 - 600		601 - 700		701 - 800		801 - 900			
Door height TH (mm)	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max			
	1576	1726	1698	1787	1820	1909					3 x		max 18 kg
	1727	2121	1788	2182	1910	2243	2032	2304	2154	2365	4 x		max 24 kg
	2122	2530	2183	2530	2244	2530	2305	2530	2366	2530	5 x		max 30 kg

### Mechanism kit – STANDARD

Part number		Door height TH (mm)
<b>YE55BAD1900NN</b>	Right	1576 - 1900
<b>YE55BAS1900NN</b>	Left	
<b>YE55BAD2500NN</b>	Right	1576 - 2530
<b>YE55BAS2500NN</b>	Left	

### Cam-carriage connection

	Part number	Usable structure depth (LPU - mm)
	<b>YE55KIT0101</b>	400-500
	<b>YE55KIT0102</b>	501-600
	<b>YE55KIT0103</b>	601-700
	<b>YE55KIT0104</b>	701-800
	<b>YE55KIT0105</b>	801-900

	<b>n° 9</b> Locating clips <b>n° 18</b> Euroscrews 6.3 x 14		<b>n° 5</b> Positioning stops <b>n° 10</b> Screws 6.3 x 14
	<b>n° 2</b> Threaded inserts M6 x 13 <b>n° 2</b> Screws M6 20 UNI 7380 <b>n° 1</b> Allen key		<b>n° 4/5</b> Hinges for the fixing of the door <b>n° 4/5</b> Flange covers <b>n° 8/10</b> Screws for the fixing of the hinges to the system M5 x 20 UNI 7688 <b>n° 8/10</b> Screws for the fixing of the hinges to the door 4 x 16 DIN 7505 A
	<b>n° 1 + n° 1</b> Door extraction dampers		<b>n° 4/5</b> Mounting plates
	<b>n° 1</b> Upper front cover		<b>n° 1</b> Mechanism connecting support profile
	<b>n° 1</b> Lower front cover		<b>n° 2</b> Vertical carriages
	<b>n° 2</b> Spare springs		<b>2.5 mt</b> Dust protection brush
	<b>n° 2</b> Door positioning supports		<b>n° 2</b> Central profile connectors
	<b>n° 1</b> Upper horizontal carriage		<b>n° 1</b> Lower horizontal carriage
	<b>n° 1</b> Door insertion stopper		<b>n° 2</b> Door extraction and insertion mechanisms
	<b>n° 12</b> fixing screws for connection plates (screws M4 x UNI) <b>n° 2</b> Cam connection plates		<b>n° 1</b> Spacers
	<b>n° 1</b> Magnetic buffer for soft insertion		<b>n° 1</b> Central profile
	<b>n° 1</b> Upper track		<b>n° 1</b> Mechanism profile connecting
	<b>n° 1</b> Lower track		<b>n° 1</b> Rear bumper
	<b>n° 1</b> Door fixing profile		