

1 Cam-assisted door insertion and extraction movement.

2 Magnetic buffer for soft insertion.

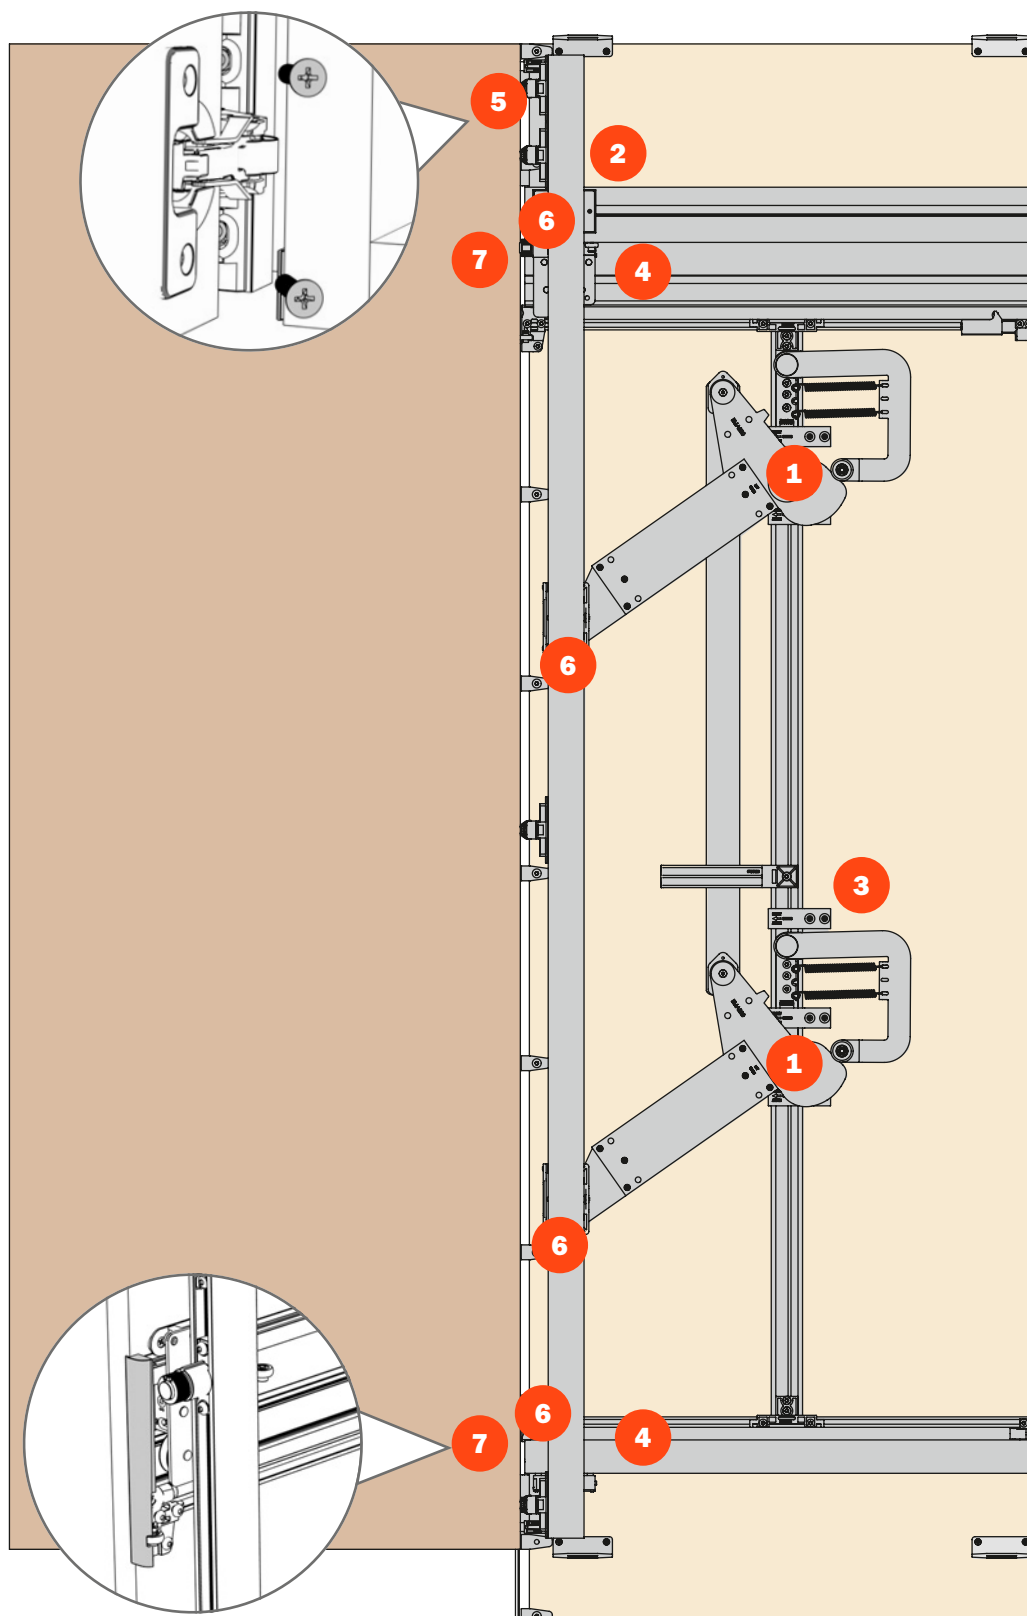
3 Slide-in installation to facilitate installation and removal of the mechanism from the front.

4 Sliding carriage.

5 Quick coupling hinges.

6 All adjustments are accessible from the front of the cabinet.

7 Profile cover caps (included in the standard versions).



Exedra - Partially assembled


Partially-assembled systems.

The partly-assembled Exedra system can be supplied in two versions: for doors with height from 1930 to 2230 mm or from 2231 to 2530 mm. Depth between 500 and 700 mm. After the identification of the version, the customer must cut to size the upper and the lower tracks, assemble the cams and install everything on the cabinet.

The locating clips and positioning stops ensure a fast and secure assembly and removal from the cabinet without the need to access the side of the cabinet.

Calculation of the min. structure dimensions

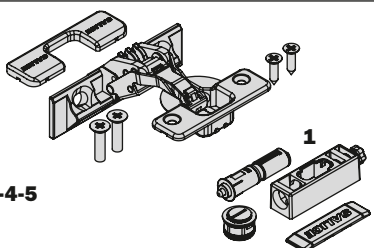
Usable structure depth (LPU - mm)					
	501 - 600		601 - 700		
Door height TH (mm)	Min	Max	Min	Max	
	1930	2230	1930	2230	4 x
	2231	2530	2231	2530	5 x



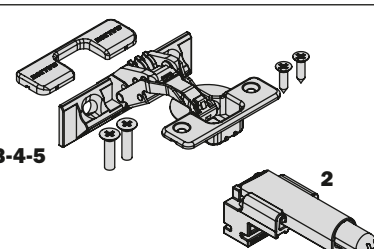
max 24 kg
max 30 kg / 40kg*

* max. weight 40 kg only with max.
door width 750 mm.

Push kit


 3-4-5	Part number	Kit composition	Packing
	VE55KITCP010AB	5 Push Hinges + 1 Release device • Nickel-plated	6 Boxes
	VE55KITCP010TB	5 Push Hinges + 1 Release device • Titanium	6 Boxes
	VE55KITCP020AB	4 Push Hinges + 1 Release device • Nickel-plated	6 Boxes
	VE55KITCP020TB	4 Push Hinges + 1 Release device • Titanium	6 Boxes
	VE55KITCP030AB	3 Push Hinges + 1 Release device • Nickel-plated	6 Boxes
	VE55KITCP030TB	3 Push Hinges + 1 Release device • Titanium	6 Boxes














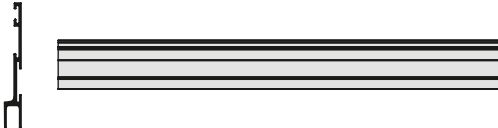

Smove kit

 3-4-5	Part number	Kit composition	Packing
	VE55KITCS010AB	5 CA Hinges + 2 Smove • Nickel-plated	6 Boxes
	VE55KITCS010TB	5 CA Hinges + 2 Smove • Titanium	6 Boxes
	VE55KITCS020AB	4 CA Hinges + 2 Smove • Nickel-plated	6 Boxes
	VE55KITCS020TB	4 CA Hinges + 2 Smove • Titanium	6 Boxes
	VE55KITCS030AB	3 CA Hinges + 2 Smove • Nickel-plated	6 Boxes
	VE55KITCS030TB	3 CA Hinges + 2 Smove • Titanium	6 Boxes

CA = sprung hinge

Mechanism kit – STANDARD PARTIALLY ASSEMBLED

Part number	 Left → Right	Usable structure depth (LPU - mm)	Door height TH (mm)
VE55CMD2200NN	Right	500 - 700	1930 - 2230
VE55CMS2200NN	Left		
VE55CMD2500NN	Right	500 - 700	2231 - 2530
VE55CMS2500NN	Left		

	n° 9 Locating clips n° 18 Euroscrews 6.3 x 14		n° 5 Positioning stops n° 10 Screws 6.3 x 14
	n° 2 Threaded inserts M6 x 13 n° 2 Screws M6 20 UNI 7380 n° 1 Allen key		n° 1 Door insertion stopper
	n° 1 + n° 1 Door extraction dampers		3 mt Dust protection brush
	n° 1 Upper front cover		n° 2 Central profile connectors
	n° 1 Lower front cover		N° 1 Spacers
	n° 2 Spare springs		n° 2 Cam connection plates
	n° 12 Fixing screws for connection plates (screws M4 x UNI)		
	n° 1 Magnetic buffer for soft insertion		
	n° 1 Upper track		
	n° 1 Lower track		
	n° 1 Rear bumper		