


Conecta • Hinge for wooden doors

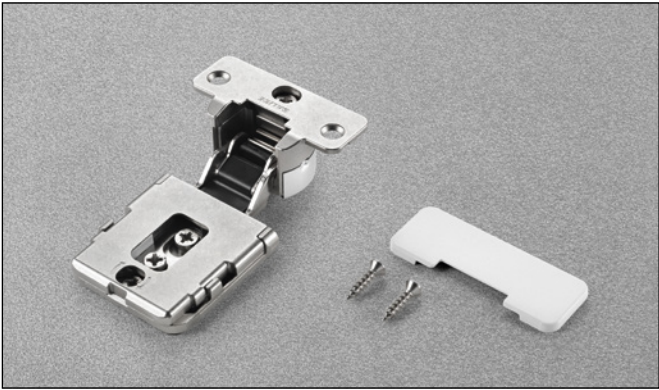


Technical features

Concealed Conecta hinge with recessed insertion in the door and in the side.

Rapid fixing of the door to the cabinet side
Diameter 35 mm
Drilling distance fixed at 10 mm from the edge of the door to the centre of the hole
94° opening
L = 3,5 mm


Depth of the metal cup:
CQL3JE: 19 mm (for doors from 22 mm)
CQA3JE: 22 mm (for doors from 25 mm)

Cup drilling depth and space needed to open the door



CQL3JE

| | | | | | | |
|----|-----|-----|-----|-----|-----|-----|
| T= | 22 | 23 | 24 | 25 | 26 | 27 |
| A= | 2.4 | 3.1 | 4.0 | 4.7 | 5.5 | 6.3 |




CQA3JE


| | | | | | | |
|----|-----|-----|-----|-----|-----|-----|
| T= | 25 | 26 | 27 | 28 | 29 | 30 |
| A= | 2.4 | 3.1 | 4.0 | 4.7 | 5.5 | 6.3 |

Assembly instructions

With holder DQG5B
Door overlay on the side = 10 mm

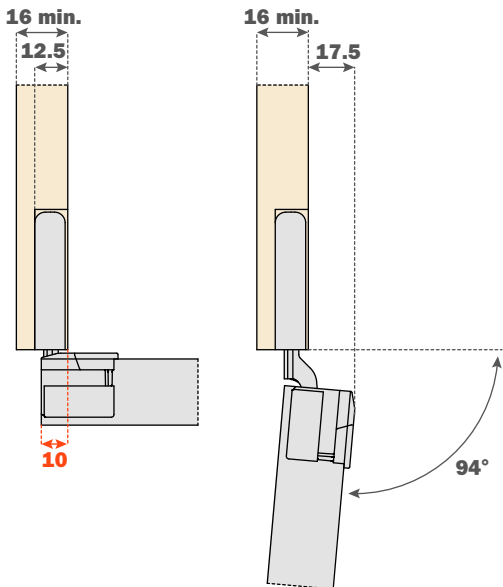

With holder DQG3B
Door overlay on the side = 12.5 mm

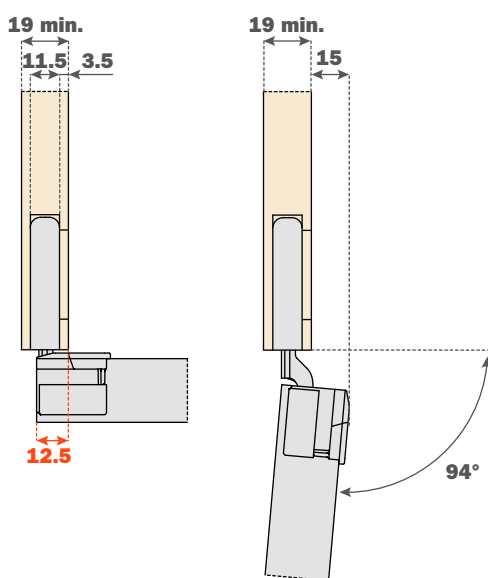

Workings on door and cabinet


Holder DQG5B




- For single application on side thickness 16 mm min.
- For double application on side thickness 25 mm

To be screw-fixed to the cabinet side:

- Single application with Euroscrews, drilling $\varnothing 5 \times 12.5$ mm
- Double application with $\varnothing 5$ mm interscrews
- Fixing screws and cover caps included in the single packing
- Fixing screws included in the industrial packing

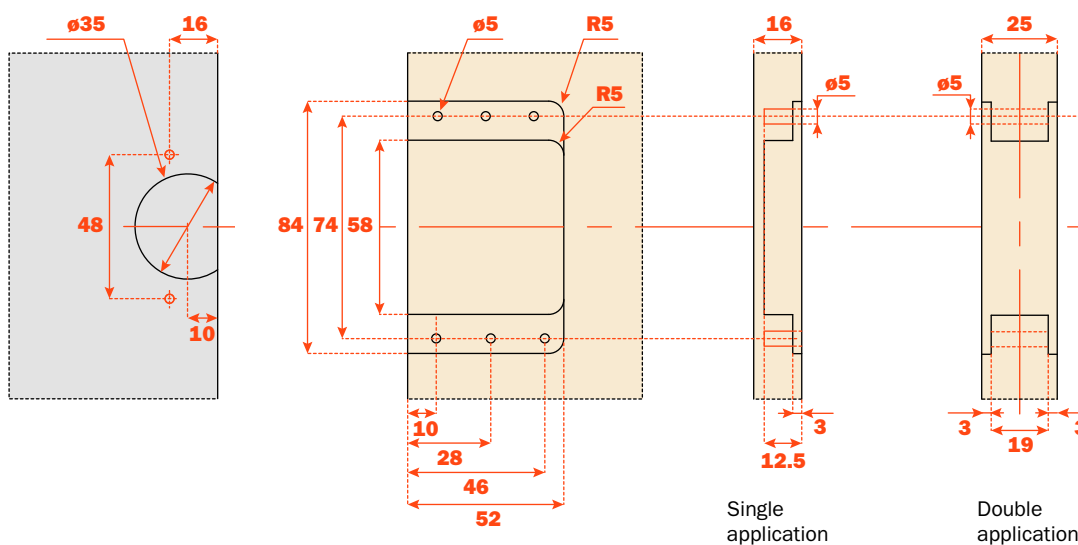

Holder DQG3B

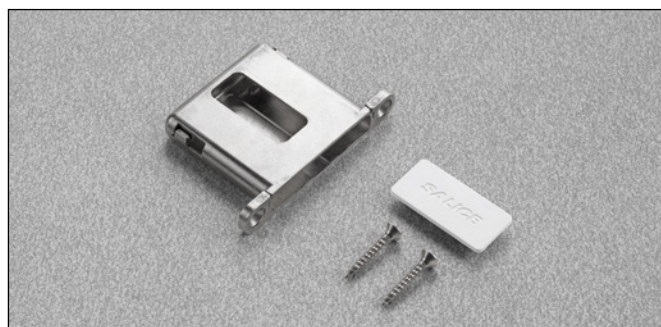

- For single application on side thickness 19 mm min.
- For double application on side thickness 30 mm

To be screw-fixed to the cabinet side:

- Single and double application with screws $\varnothing 4 \times 25$ mm
- Fixing screws and cover caps included in the single packing
- Fixing screws included in the industrial packing

