


Conecta

Hinge for wooden doors 94°

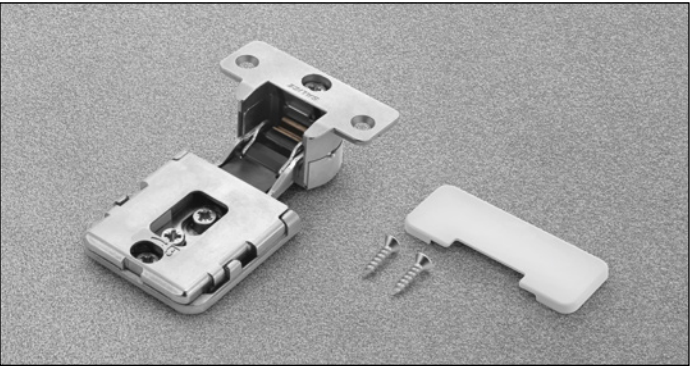

Technical features

Concealed Conecta hinge with recessed insertion in the door and in the side.

Rapid fixing of the door to the cabinet side

Diameter 35 mm

Drilling distance fixed at 10 mm from the edge of the door to the centre of the hole

Door overlay 14 mm with holder DQG5 and 16.5 mm with holder DQG3

94° opening


L = 3.5 mm

Depth of the metal cup:

CQL3KE: 19 mm (for doors from 22 mm)


CQA3KE: 22 mm (for doors from 25 mm)

Cup drilling depth and space needed to open the door



CQL3KE

T=	22	23	24	25	26	27
A=	2.4	3.1	4.0	4.7	5.5	6.3



CQA3KE

T=	25	26	27	28	29	30
A=	2.4	3.1	4.0	4.7	5.5	6.3

Assembly instructions

With holder DQG5B

Door overlay on the side = 14 mm

16 min.

12.5

14

16 min.

13.5

94°

With holder DQG3B

Door overlay on the side = 16.5 mm

19 min.

11.5 3.5

16.5

19 min.

11

94°


Holder DQG5B



- For single application on side thickness 16 mm min.**


To be screw-fixed to the cabinet side:

- Single application with Euroscrews, drilling $\varnothing 5 \times 12.5$ mm
- Fixing screws and cover caps included in the single packing
- Fixing screws included in the industrial packing

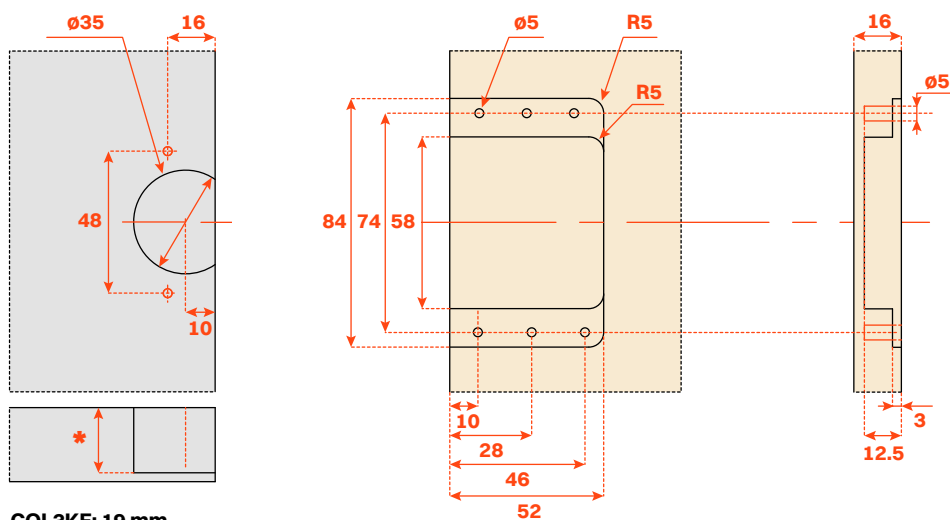

CQL3KE: 19 mm
CQA3KE: 22 mm


Holder DQG3B

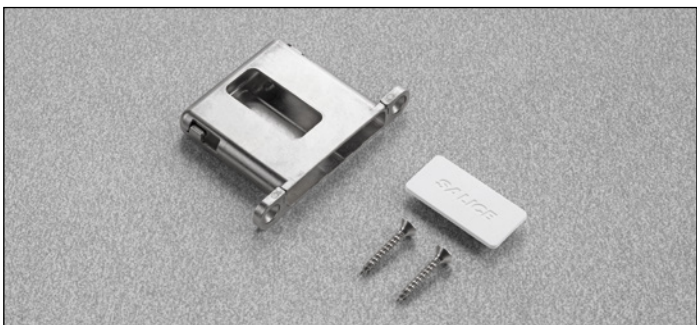

- For single application on side thickness 19 mm min.**

To be screw-fixed to the cabinet side:

- Single application with screws $\varnothing 4 \times 25$ mm
- Fixing screws and cover caps included in the single packing
- Fixing screws included in the industrial packing

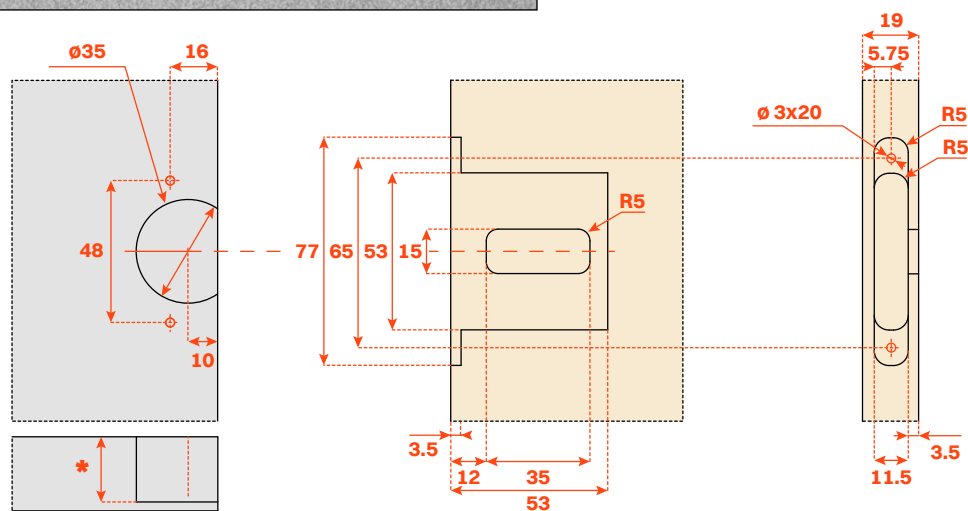

CQL3KE: 19 mm
CQA3KE: 22 mm