


Conecta • Hinge for wooden doors

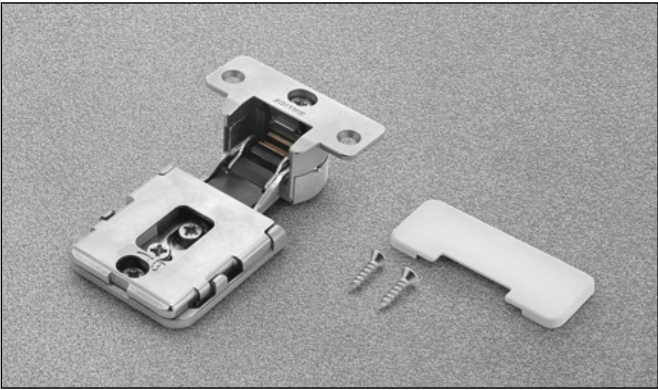


Technical features

Concealed Conecta hinge with recessed insertion in the door and in the side.

Rapid fixing of the door to the cabinet side
Diameter 35 mm
Drilling distance fixed at 10 mm from the edge of the door to the centre of the hole
94° opening
L = 3,5 mm


Depth of the metal cup:
CQL3KE: 19 mm (for doors from 22 mm)
CQA3KE: 22 mm (for doors from 25 mm)

Cup drilling depth and space needed to open the door



CQL3KE

T=	22	23	24	25	26	27
A=	2.4	3.1	4.0	4.7	5.5	6.3




CQA3KE

T=	25	26	27	28	29	30
A=	2.4	3.1	4.0	4.7	5.5	6.3

Assembly instructions

With holder DQG5B
Door overlay on the side = 14 mm

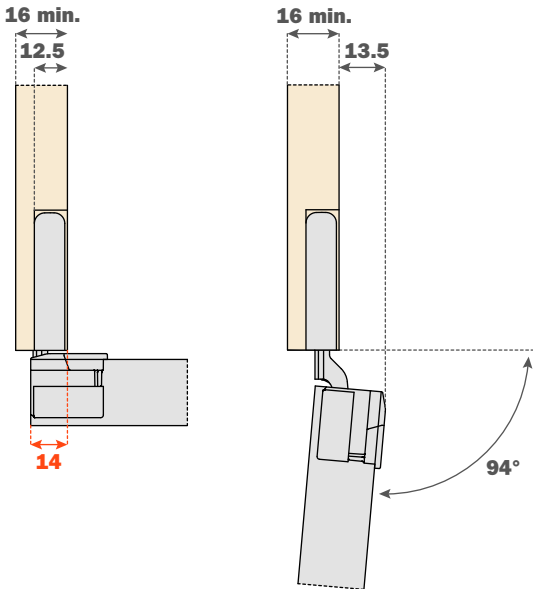

With holder DQG3B
Door overlay on the side = 16.5 mm

