


Conecta

Soft-close hinge for wooden and aluminium-framed doors 180°

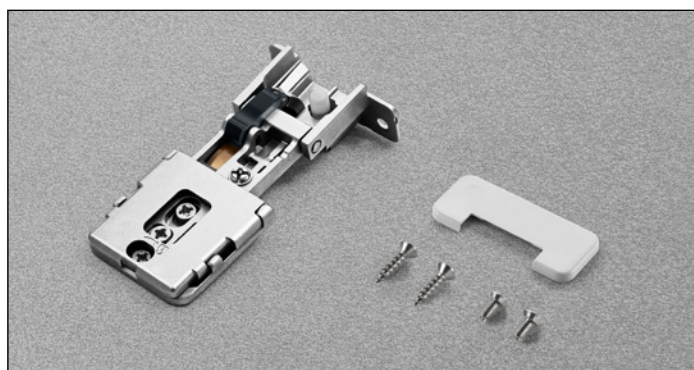

Technical features

Concealed Conecta hinge with recessed insertion in the door and in the side.


Rapid fixing of the door to the cabinet side
For wooden and aluminium-framed doors
Door overlay 10 mm with holder DQG5 and 12.5 mm with holder DQG3
180° opening
L = 3.5 mm

Depth of the metal cup: **19 mm**

Cup drilling depth and space needed to open the door


CQAIJE

Wooden door



CQAIJE


Aluminium-framed door




Indicazione di montaggio

With holder DQG5B

Door overlay on the side = 10 mm

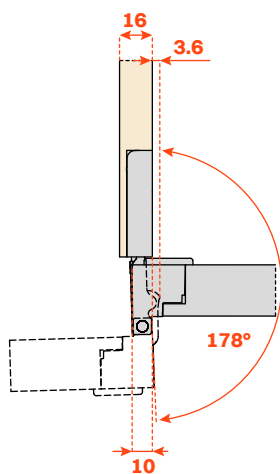


CQAIJE

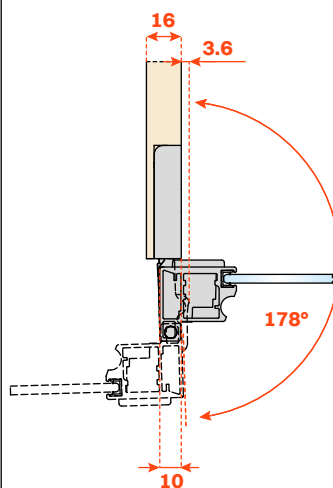


CQAIJE

With holder DQG3B

Door overlay on the side = 12.5 mm

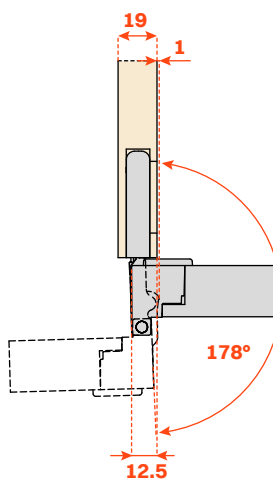

CQAIJE

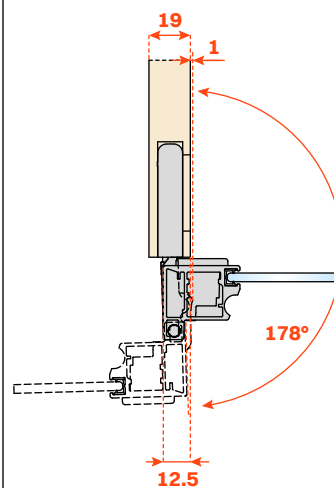

CQAIJE


Holder DQG5B



- For single application on side thickness 16 mm min.
- For double application on side thickness 25 mm

To be screw-fixed to the cabinet side:

- Single application with Euroscrews, drilling $\varnothing 5 \times 12.5$ mm
- Double application with $\varnothing 5$ mm interscrews
- Fixing screws and cover caps included in the single packing
- Fixing screws included in the industrial packing

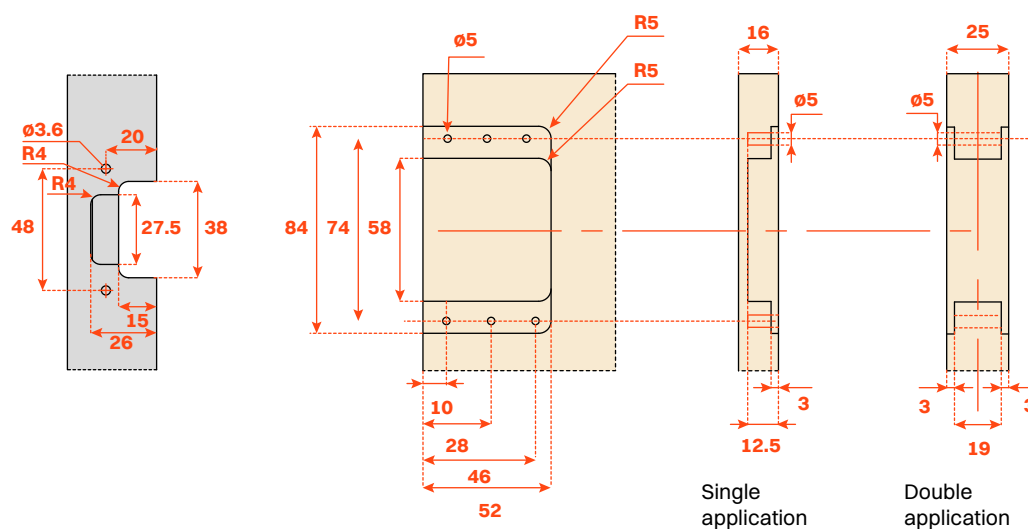

Holder DQG3B



- For single application on side thickness 19 mm min.
- For double application on side thickness 30 mm

To be screw-fixed to the cabinet side:

- Single and double application with screws $\varnothing 4 \times 25$ mm
- Fixing screws and cover caps included in the single packing
- Fixing screws included in the industrial packing

