


Conecta
Hinge for aluminium-framed doors 94°

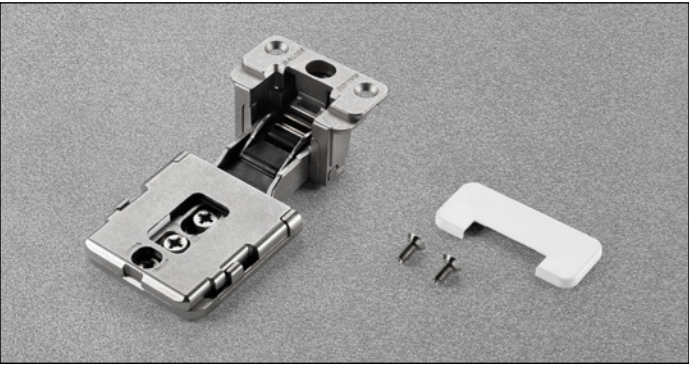


Technical features

Concealed Conecta hinge with recessed insertion in the door and in the side.

Rapid fixing of the door to the cabinet side
For aluminium-framed doors
Door overlay 10 mm with holder DQG5 and 12.5 mm with holder DQG3
94° opening
L = 3.5 mm


Depth of the metal cup:
CQY3JE: 21 mm
CQZ3JE: 24 mm

Cup drilling depth and space needed to open the door



CQY3JE

T=	22	23	24	25	26	27
A=	2.4	3.1	4.0	4.7	5.5	6.3



CQZ3JE

T=	25	26	27	28	29	30
A=	2.4	3.3	4.2	5.2	6.1	7.1

Assembly instructions

With holder DQG5B
Door overlay on the side = 10 mm

CQY3JE

CQZ3JE

With holder DQG3B
Door overlay on the side = 12.5 mm

CQY3JE

CQZ3JE


Holder DQG5B



- For single application on side thickness 16 mm min.
- For double application on side thickness 25 mm

To be screw-fixed to the cabinet side:

- Single application with Euroscrews, drilling $\varnothing 5 \times 12.5$ mm
- Double application with $\varnothing 5$ mm interscrews
- Fixing screws and cover caps included in the single packing
- Fixing screws included in the industrial packing

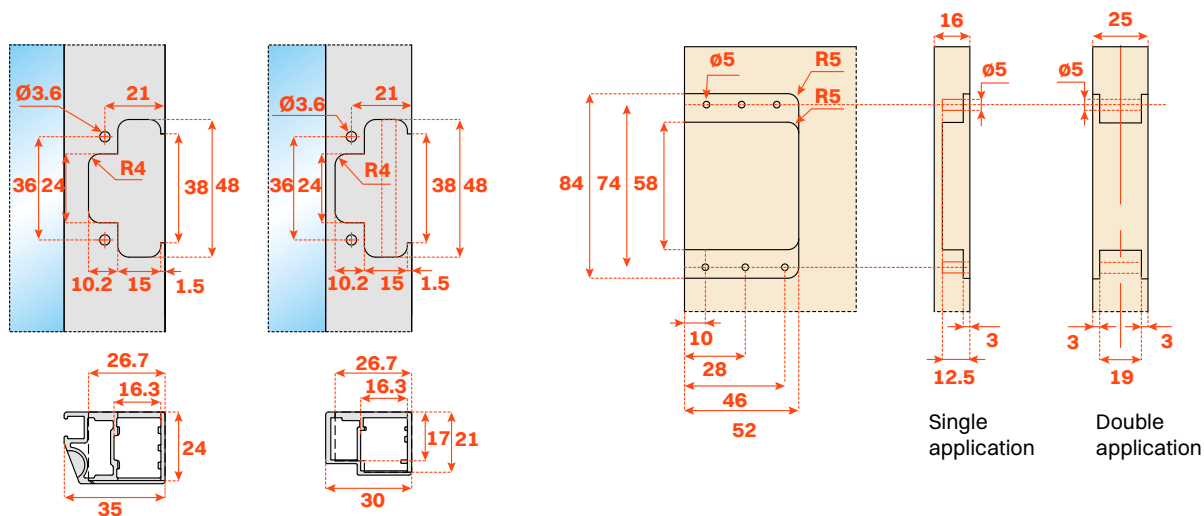

Holder DQG3B



- For single application on side thickness 19 mm min.
- For double application on side thickness 30 mm

To be screw-fixed to the cabinet side:

- Single and double application with screws $\varnothing 4 \times 25$ mm
- Fixing screws and cover caps included in the single packing
- Fixing screws included in the industrial packing

