


Conecta • Hinge for aluminium-framed doors

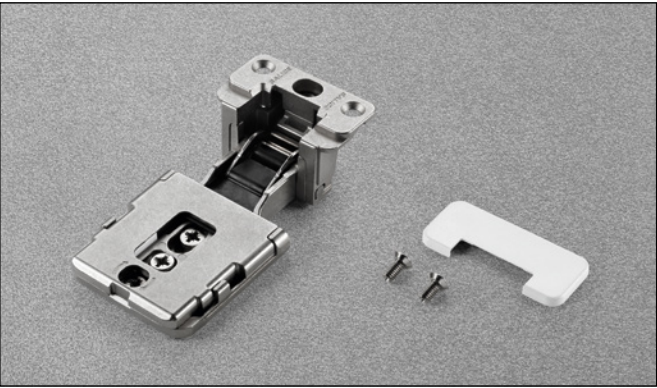


Technical features

Concealed Conecta hinge with recessed insertion in the door and in the side.

Rapid fixing of the door to the cabinet side
For aluminium-framed doors
94° opening
L = 3,5 mm

Depth of the metal cup:
CQY3JE: 21 mm


Cup drilling depth and space needed to open the door

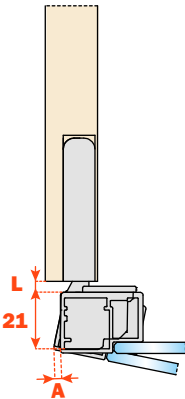


T=	22	23	24	25	26	27
A=	2.4	3.1	4.0	4.7	5.5	6.3

Assembly instructions

With holder DQG5B
Door overlay on the side = 10 mm

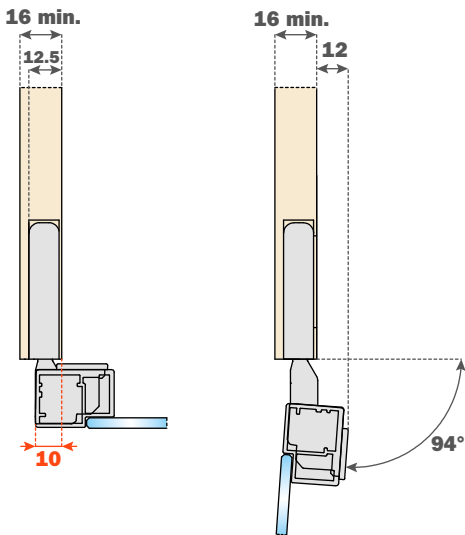

With holder DQG3B
Door overlay on the side = 12.5 mm

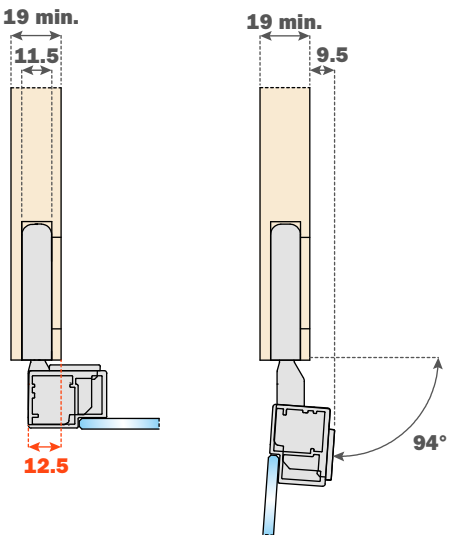

Workings on door and cabinet


Holder DQG5B



- For single application on side thickness 16 mm min.
- For double application on side thickness 25 mm


To be screw-fixed to the cabinet side:

- Single application with Euroscrews, drilling $\varnothing 5 \times 12.5$ mm
- Double application with $\varnothing 5$ mm interscrews
- Fixing screws and cover caps included in the single packing
- Fixing screws included in the industrial packing

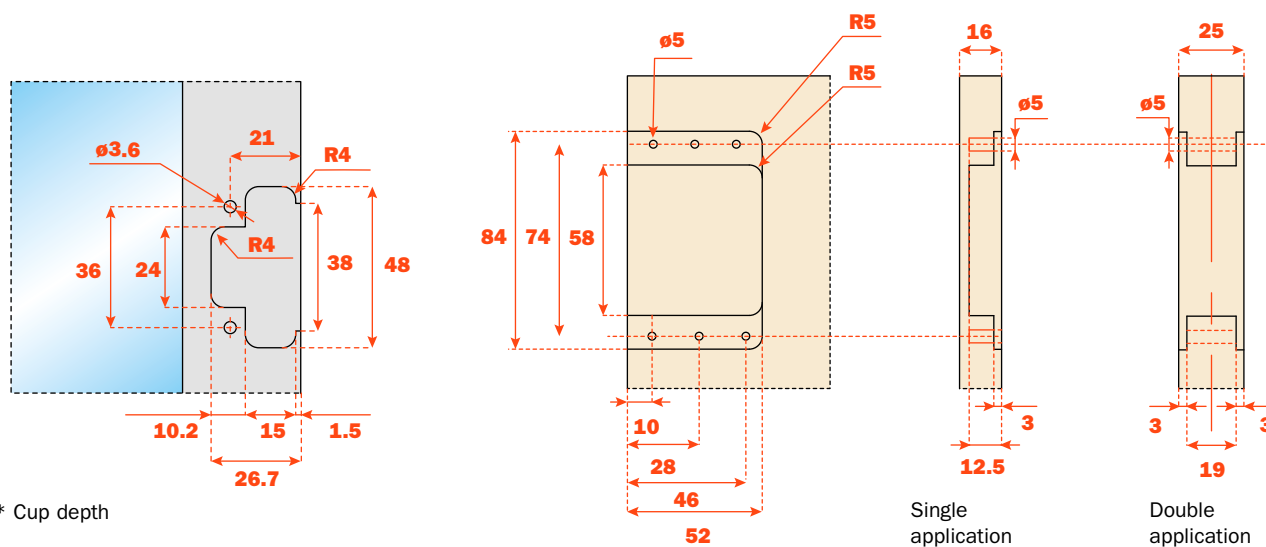

* Cup depth


Holder DQG3B

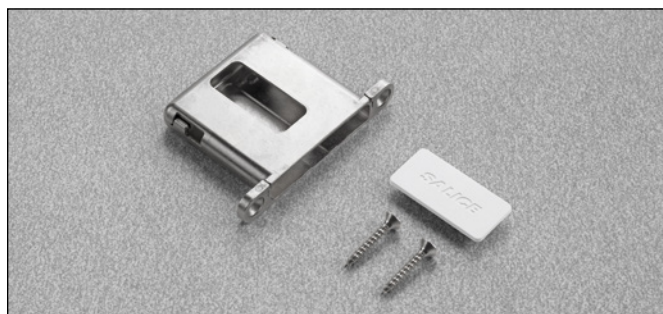

- For single application on side thickness 19 mm min.
- For double application on side thickness 30 mm

To be screw-fixed to the cabinet side:

- Single and double application with screws $\varnothing 4 \times 25$ mm
- Fixing screws and cover caps included in the single packing
- Fixing screws included in the industrial packing

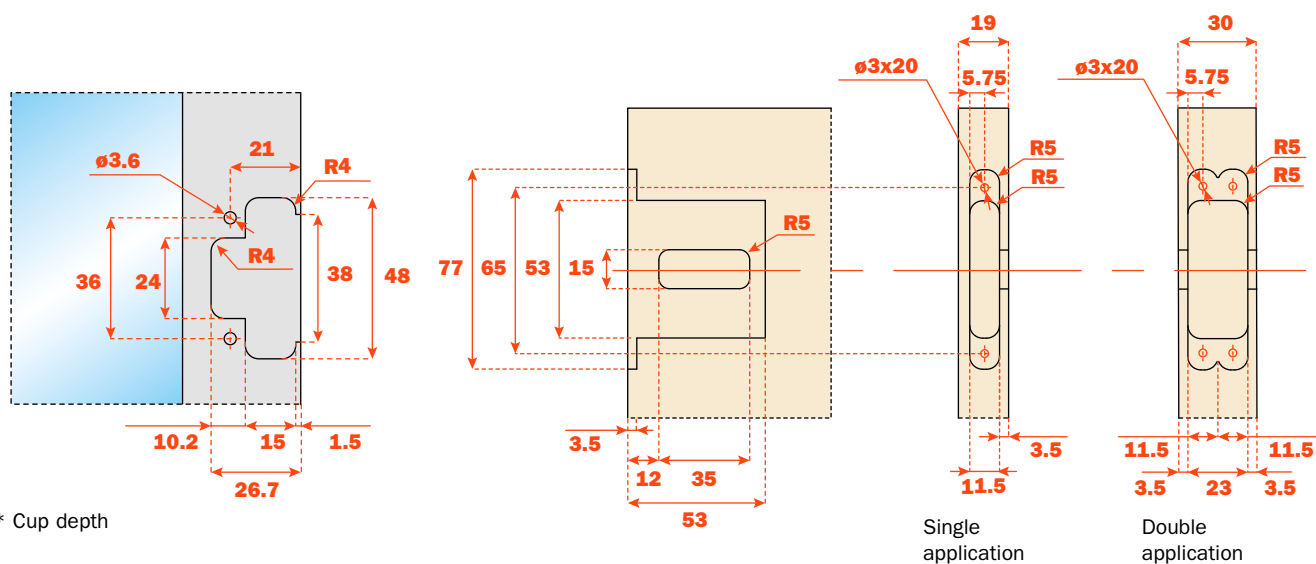

* Cup depth