


Conecta

Hinge for aluminium-framed doors 94°

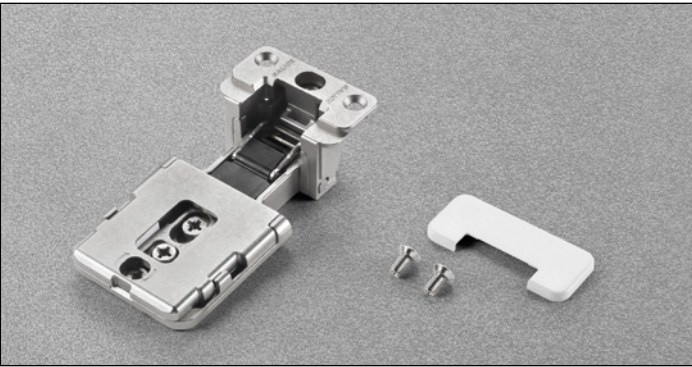

Technical features

Concealed Conecta hinge with recessed insertion in the door and in the side.

Rapid fixing of the door to the cabinet side

For aluminium-framed doors

Door overlay 14 mm with holder DQG5 and 16.5 mm with holder DQG3

94° opening


L = 3.5 mm

Depth of the metal cup:

CQY3KE: 21 mm


CQZ3KE: 24 mm

Cup drilling depth and space needed to open the door



CQY3KE

T=	22	23	24	25	26	27
A=	2.4	3.1	4.0	4.7	5.5	6.3



CQZ3KE

T=	25	26	27	28	29	30
A=	2.4	3.3	4.2	5.2	6.1	7.1

Assembly instructions

With holder DQG5B

Door overlay on the side = 14 mm

16 min

8

14

94°

16 min

10.5

14

94°

CQY3KE

CQZ3KE

With holder DQG3B

Door overlay on the side = 16.5 mm

19 min

5.5

16.5

94°

19 min

8

16.5

94°

CQY3KE

CQZ3KE

18


Holder DQG5B



- For single application on side thickness 16 mm min.
- For double application on side thickness 25 mm

To be screw-fixed to the cabinet side:

- Single application with Euroscrews, drilling $\varnothing 5 \times 12.5$ mm
- Double application with $\varnothing 5$ mm interscrews
- Fixing screws and cover caps included in the single packing
- Fixing screws included in the industrial packing

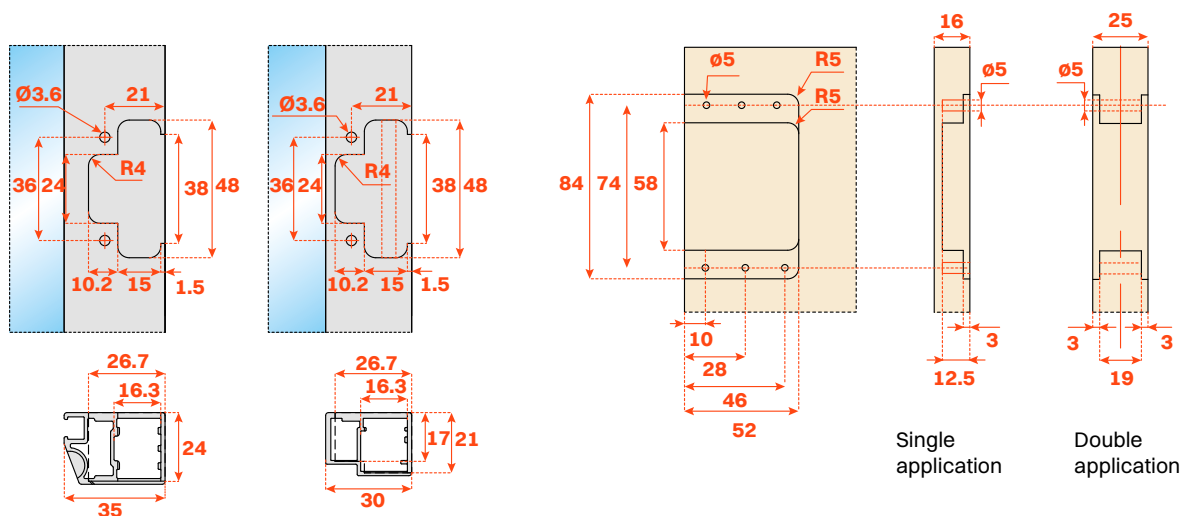

Holder DQG3B



- For single application on side thickness 19 mm min.
- For double application on side thickness 30 mm

To be screw-fixed to the cabinet side:

- Single and double application with screws $\varnothing 4 \times 25$ mm
- Fixing screws and cover caps included in the single packing
- Fixing screws included in the industrial packing

