


Conecta • Hinge for wood doors

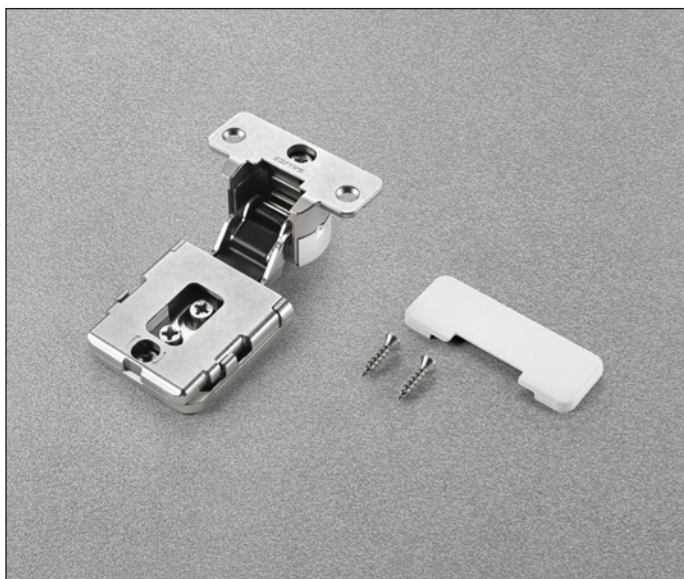


Technical features

Concealed Conecta CQA3JE hinge with recessed insertion in the side panel.

Rapid fastening of the door to the cabinet side
 22 mm deep metal cup
 Drilling distance fixed at 10 mm from the edge of the door to the centre of the hole
 Diameter 35 mm
 L = 3,5 mm
 94° opening
 6-way adjustable


Space needed to open the door

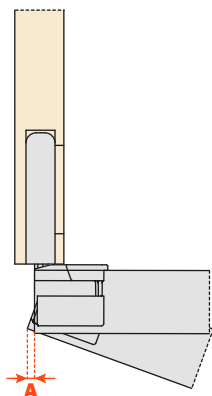


T=	25	26	27	28	29	30
A=	2.4	3.1	4.0	4.7	5.5	6.3

Fixing into the side and protrusion of the door

With holder DQG5B

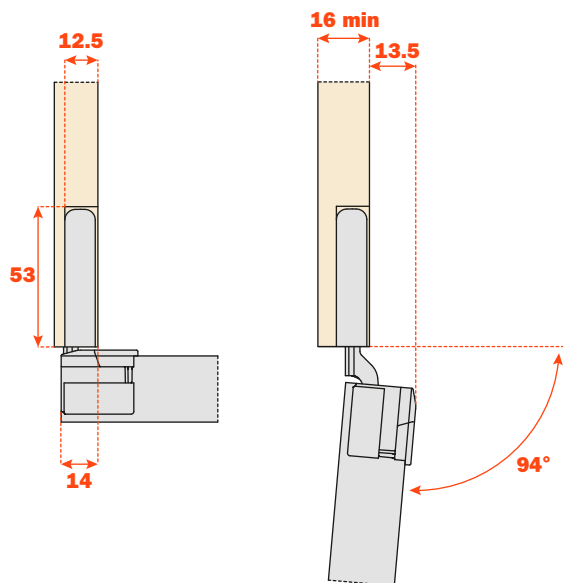


With holder DQG3B

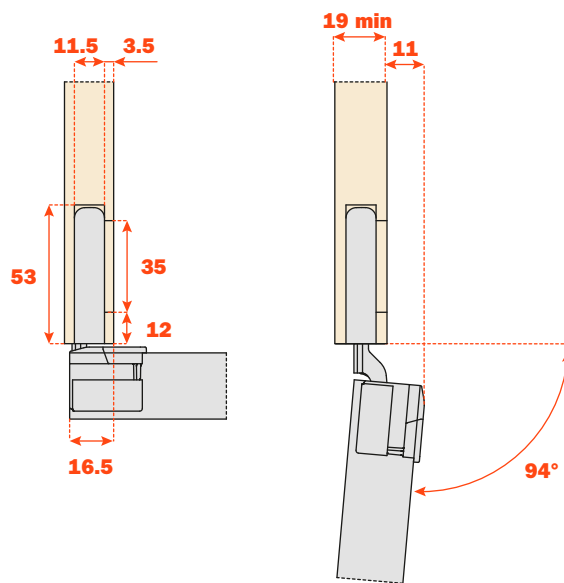


Assembly on door and cabinet

Holder DQG5B

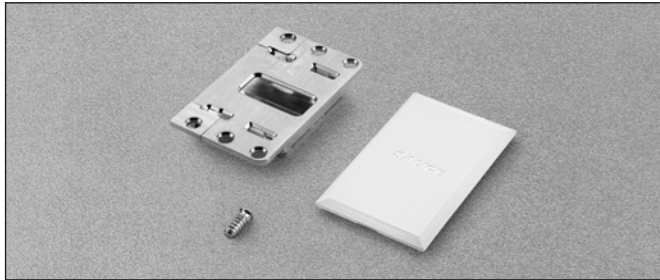


- For single door applications
- For double doors applications with 25 mm (1") side panel thickness

- Attaches to the side using $\varnothing 5 \times 12.5$ mm Euroscrews
- Screws and cover caps included in packaging

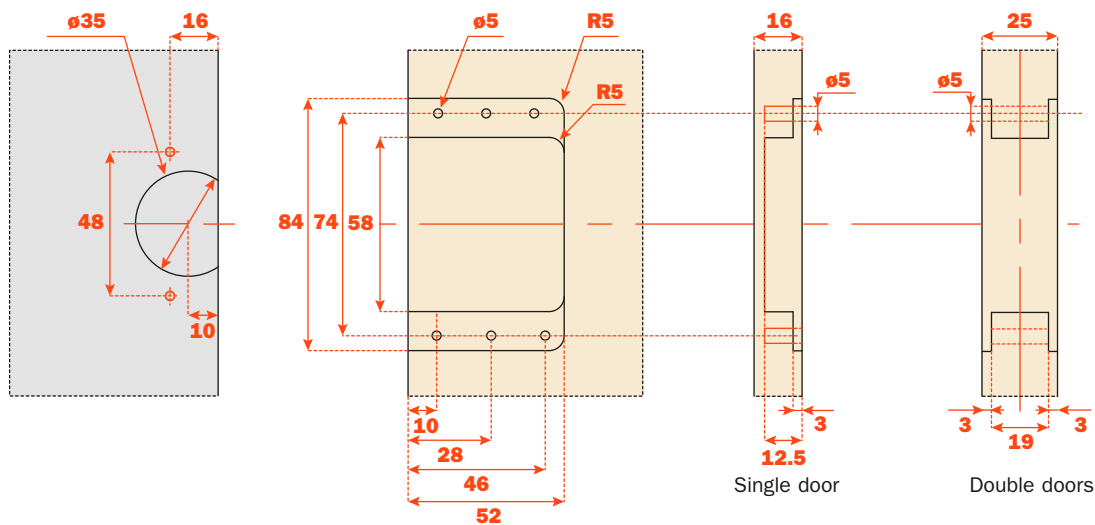

Holder DQG3B

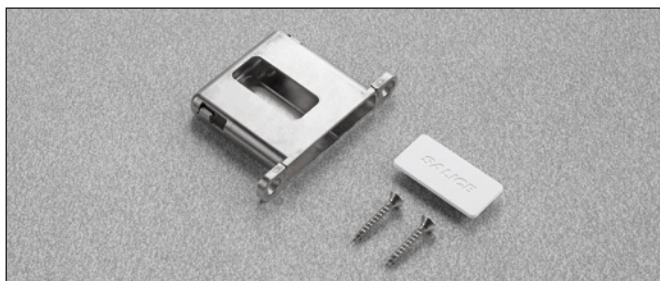

- For single door applications
- For double doors applications with 30 mm (1 - 5/16") side panel thickness

- Attaches to the side using $\varnothing 4 \times 25$ mm screws
- Screws and cover caps included in packaging

