
Conecta • Hinge for wood doors

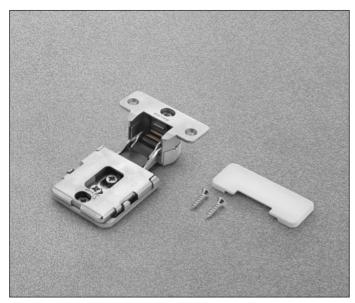

Technical features

Concealed Conecta CQA3KE hinge with recessed insertion in the side panel.

Rapid fastening of the door to the cabinet side 22 mm deep metal cup Drilling distance fixed at 10 mm from the edge of the door to the centre of the hole


Diameter 35 mm

L = 3.5 mm

94° opening


6-way adjustable


Space needed to open the door



T=	25	26	27	28	29	30
A=	2.4	3.1	4.0	4.7	5.5	6.3


Fixing into the side and protrusion of the door

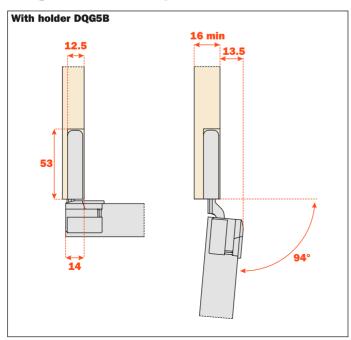




Assembly on door and cabinet

Holder DQG5B




- For single door applications

- Attaches to the side using ø5x12.5 mm Euroscrews
- Screws and cover caps included in packaging

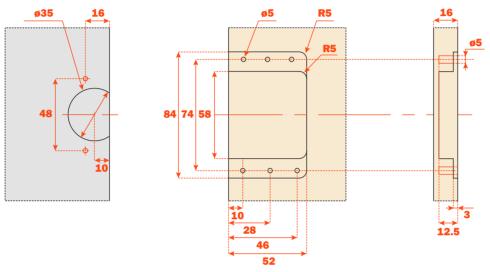

Holder DQG3B



- For single door applications

- Attaches to the side using $\emptyset 4x25 \text{ mm}$ screws
- Screws and cover caps included in packaging

