


Conecta • Hinge for aluminum-framed doors

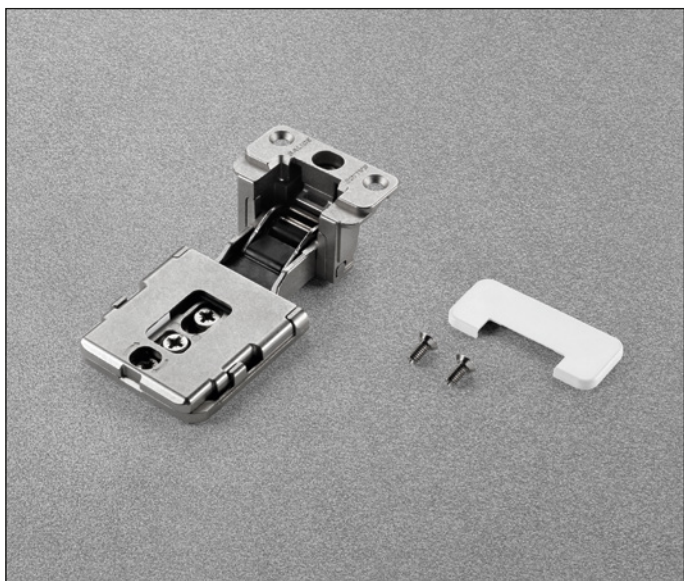


Technical features

Concealed Conecta CQZ3KE hinge with recessed insertion in the side panel.

Rapid fastening of the door to the cabinet side
 For aluminum-framed doors
 24 mm deep metal cup
 L = 3,5 mm
 94° opening
 6-way adjustable


Space needed to open the door

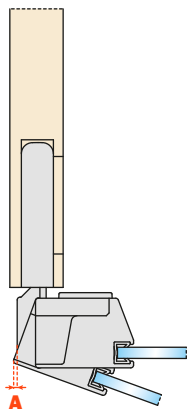


T=	25	26	27	28	29	30
A=	2.4	3.3	4.2	5.2	6.1	7.1

Fixing into the side and protrusion of the door

With holder DQG5B

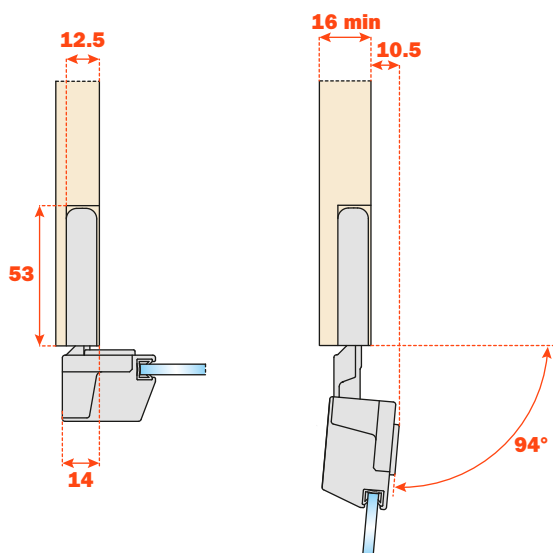

With holder DQG3B

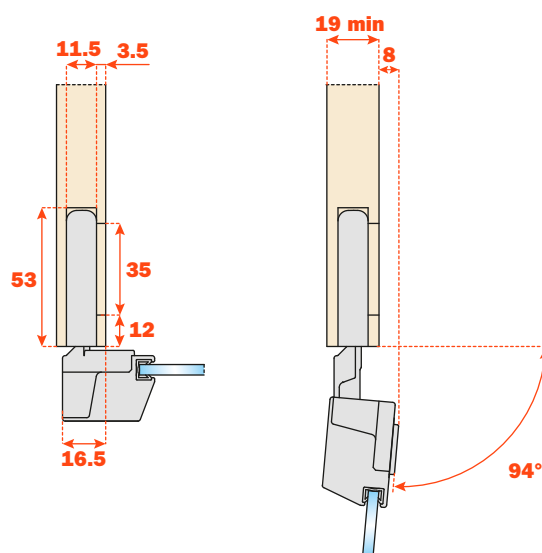

Assembly on door and cabinet

Holder DQG5B




- For single door applications


- Attaches to the side using $\varnothing 5 \times 12.5$ mm Euroscrews
- Screws and cover caps included in packaging

Drilling with corner connector
DQZ3HS5V04


Drilling with corner connector
DEL6BSFV02

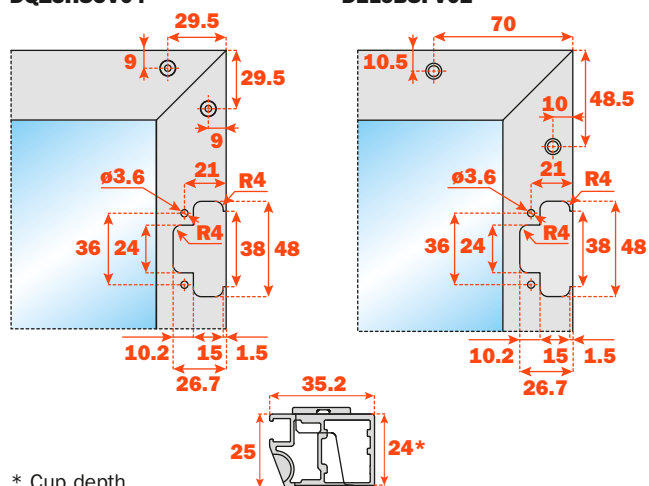

* Cup depth

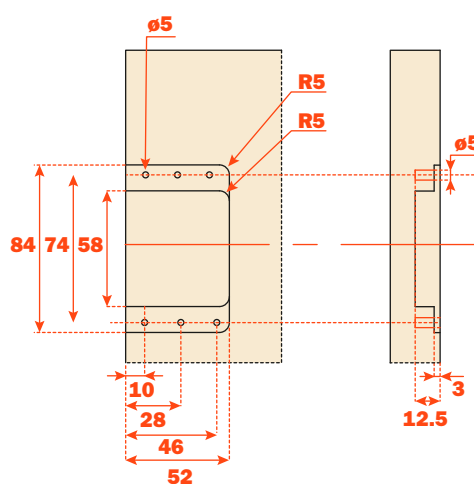

Holder DQG3B

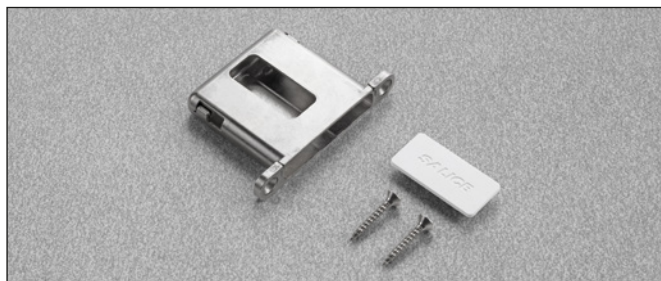


- For single door applications

- Attaches to the side using $\varnothing 4 \times 25$ mm screws
- Screws and cover caps included in packaging

Drilling with corner connector
DQZ3HS5V04

Drilling with corner connector
DEL6BSFV02

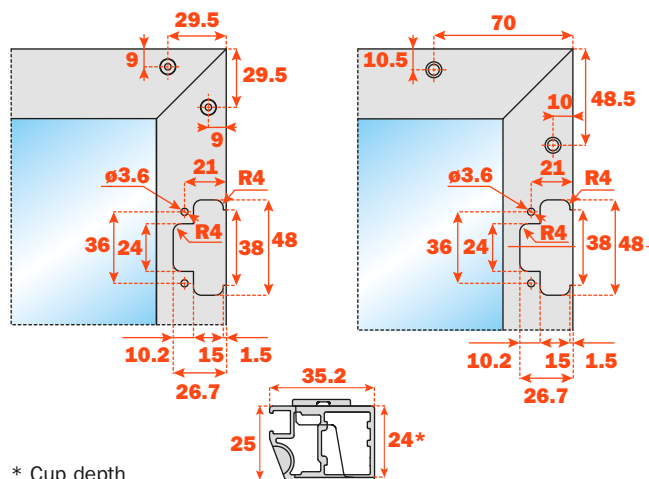

* Cup depth

