


Series 200 - Complementary hinges

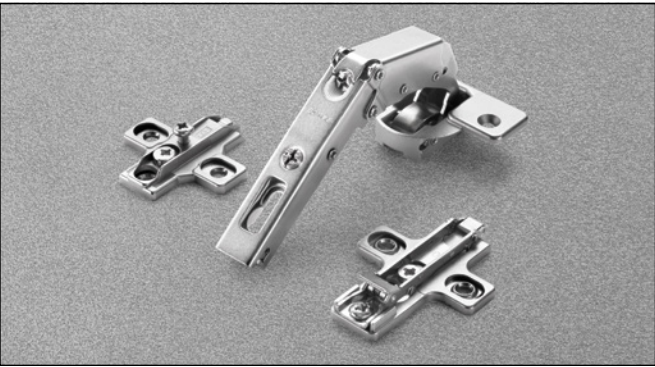


Technical information

Adjustable hinge for corner cabinets.

11 mm deep die-cast cup.
35 mm cup diameter.
Opening angle of the first door 65°.
Possible drilling distance on the door (K): from 3 to 5 mm.
Maximum thickness of the door with square edges: 25 mm.
For thicker doors or doors with mouldings or with large radiused edges, please refer to our technical assistance.
Compatible with all traditional Series 200 mounting plates and with all Domi snap-on mounting plates.

Packing
Boxes 150 pcs.
Pallets 3.600 pcs.


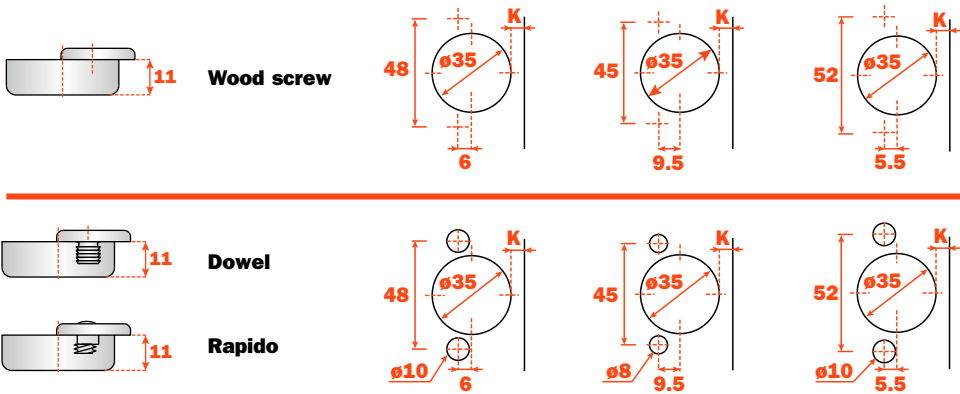


All hinges are available in titanium finish;
to order them replace the numbers 99 of
the part number with the numbers 66.


Example: C2AYA**99**R = Nickel-plated
C2AYA**66**R = Titanium

		Sprung hinge Nickel-plated finish					
		48	45	52			
Fixing							
	Wood screw	C2AYA99R	C2PYA99R	C2UYA99R			
	Dowel	C2BYA99R	C2RYA99R	C2WYA99R			
	Rapido	C26YA99R	C27YA99R	C22YA99R			

Diagonal adjustment

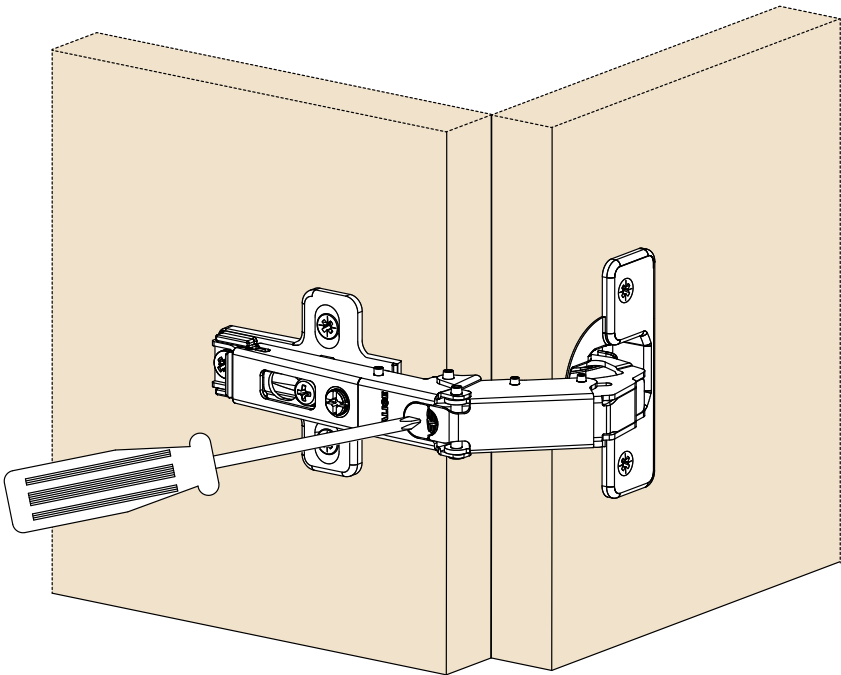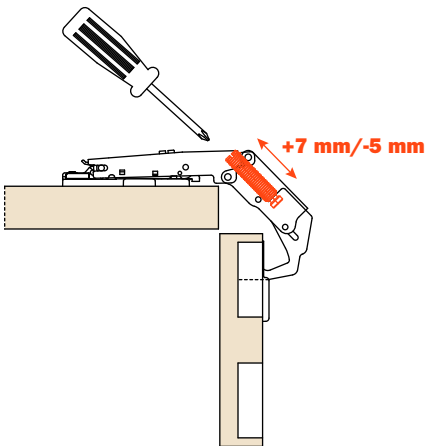

Hinge movement and maximum opening angle

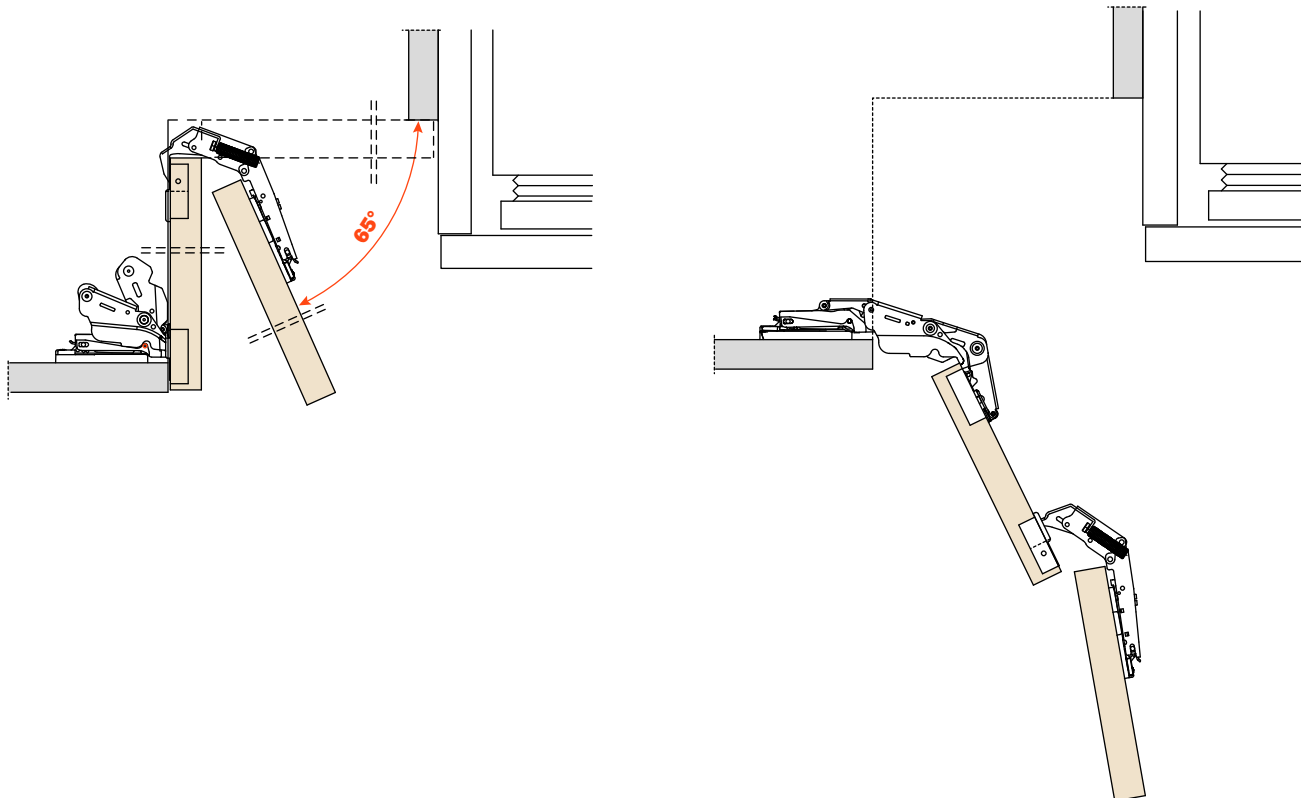

Diagonal adjustment and space required to accommodate the hinge


With H0 mounting plates

Suitable for door thickness from 16 to 25 mm

- For door thickness from 16 to 23 mm, K from 3 to 5 mm
- For door thickness from 24 to 25 mm, K from 3 to 4 mm

The maximum space required to accommodate the hinge with mounting plates

- Series 200 = 61 mm
- Domi = 70 mm
- Domi with back cam = 74 mm

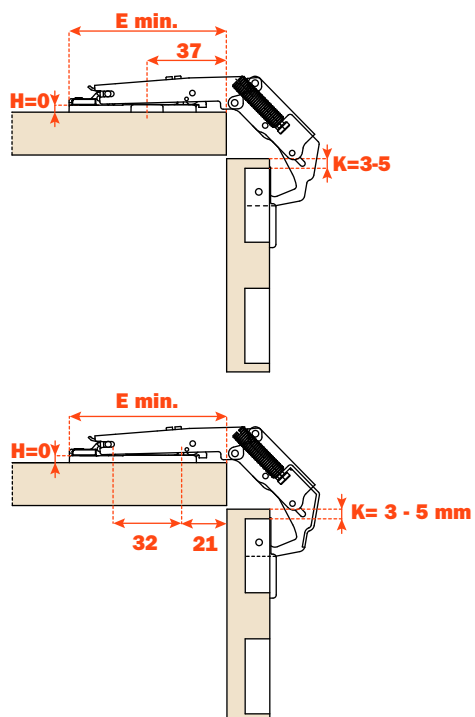

With H3 mounting plates

Suitable for door thickness from 19 to 25 mm

- For door thickness from 19 to 23 mm, K from 3 to 5 mm
- For door thickness from 24 to 25 mm, K from 3 to 4 mm

The maximum space required to accommodate the hinge with mounting plates

- Series 200 = 64 mm
- Domi = 73 mm
- Domi with back cam = 77 mm

