



Modular drawer

3-SIDED H 128 - wooden frontal

ALUMINIUM 3-SIDED DRAWER H 128


WOODEN FRONTAL H 150

- Profile height: 128 mm
- Max. drawer width: min. 250 mm - max. 1250 mm
- Side material: epoxy-coated aluminium
- Side finish: metal grey brown
- Corners material: ABS
- Corners finish: metal grey brown
- Integrated height and depth adjustments
- Equipped with anti-tipping device
- Back to cut to length with gasket to insert
- Side supplied with gasket to be inserted and with Futura full-extension runners (CHART 1)
- Kit for the wooden frontal fixing, to be ordered separately (CHART 2)
- Frontal and bottom not included
- Bottom can be made of wood or glass



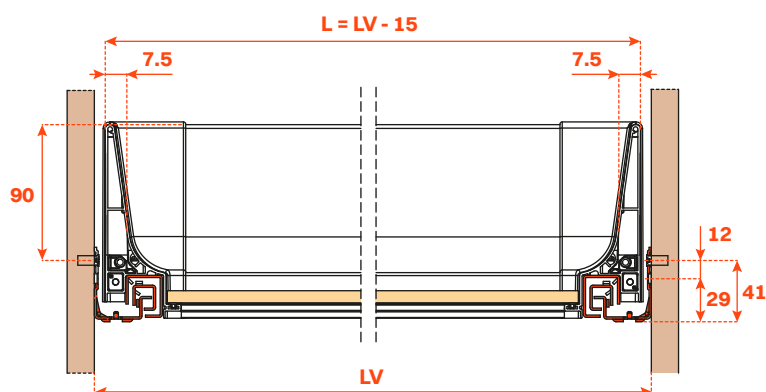
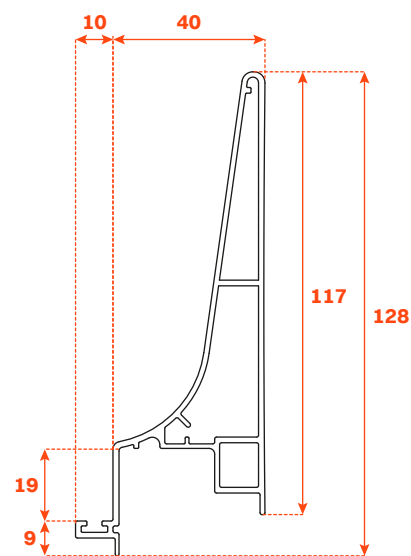


LV = cabinet width


ASSEMBLY WITH WOODEN FRONTAL, 12 mm THICKNESS

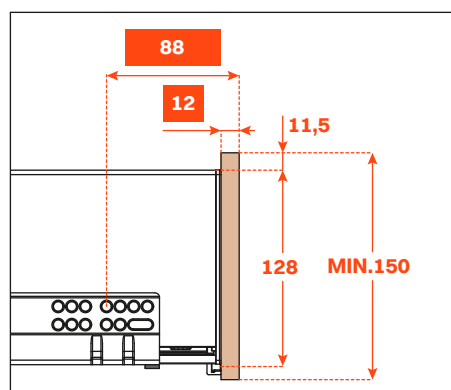

ASSEMBLY WITH WOODEN FRONTAL, 19 mm THICKNESS

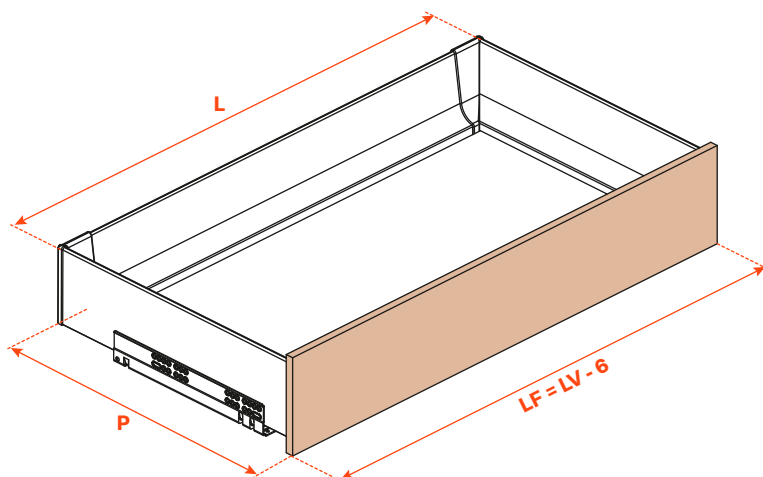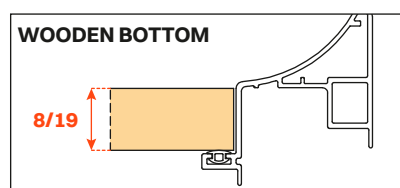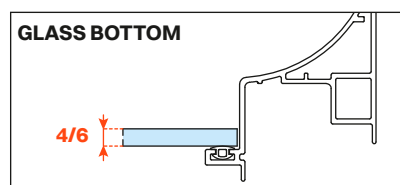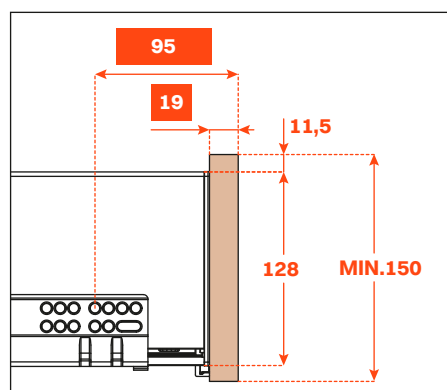

INTERNAL DIMENSIONS

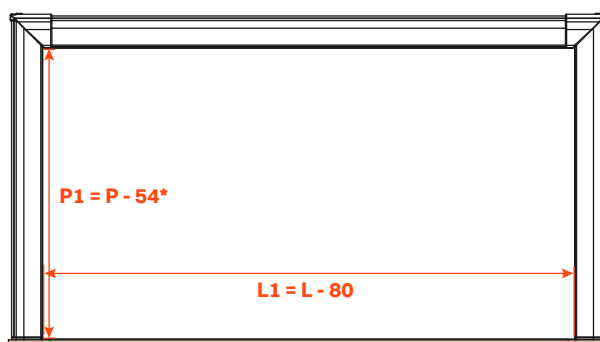

* internal dimensions from the corners

COMPONENTS

1. Joints for back profile
2. Back corners
3. Screws TPS DELTA PT 4x23 mm
- 3A. Screws TPS 3.5x13 mm Black
4. Back profile
5. Side profiles

Kit for the frontal fixing

(to be ordered separately)

6. Euroscrews TPSV 6.3x14 mm
7. Fixing caps
8. Aluminium profile
9. Connecting elements for the frontal
10. Screws TPS M 4x12 mm

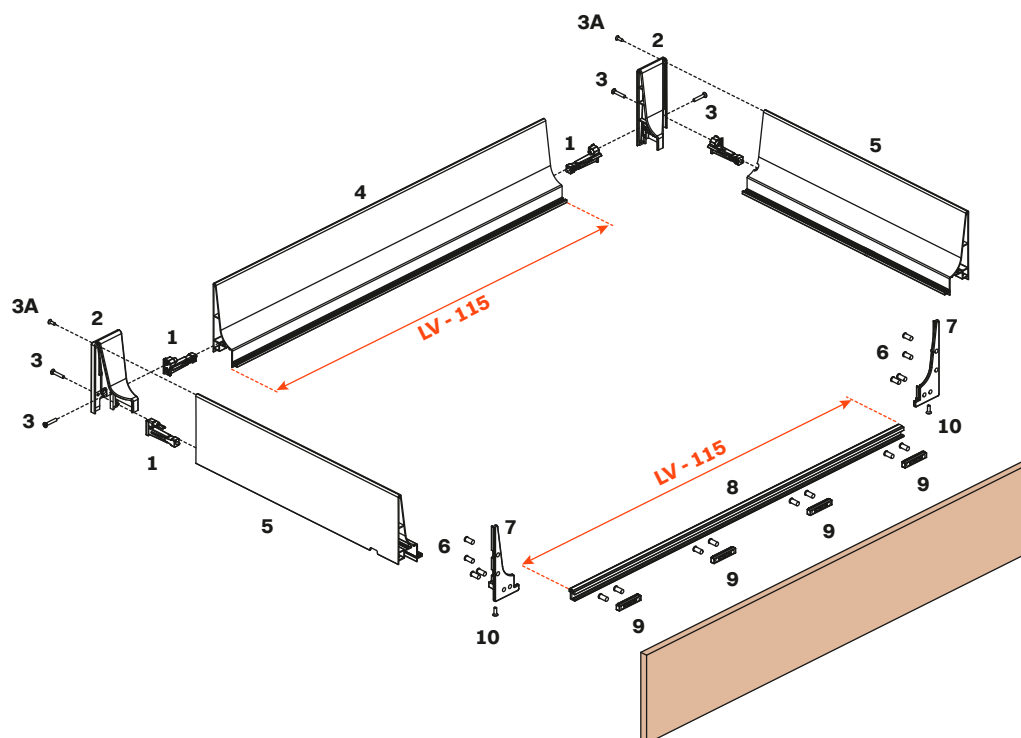



CHART 1

PART NUMBER KIT RUNNERS AND SIDE PROFILES	Runner length (LN) mm	Drawer depth (P) mm	PACKAGE DIMENSIONS mm	PACKAGE WEIGHT Kg
VE80QFAG40033A	400	440	121 x 681 x H 146	3.5
VE80QFAG45033A	450	490	121 x 731 x H 146	4
VE80QFAG47033A	470	510	121 x 751 x H 146	4.2

CHART 2

PART NUMBER KIT BACK PROFILE AND KIT FOR FRONTAL	Profile length mm	PACKAGE DIMENSIONS mm	PACKAGE WEIGHT Kg
VE80QFCA07033A	700	145 x 743 x H 80	1.5
VE80QFCA09033A	900	145 x 943 x H 80	2
VE80QFCA12533A	1250	145 x 1293 x H 80	2.7

FRONTAL DRILLING

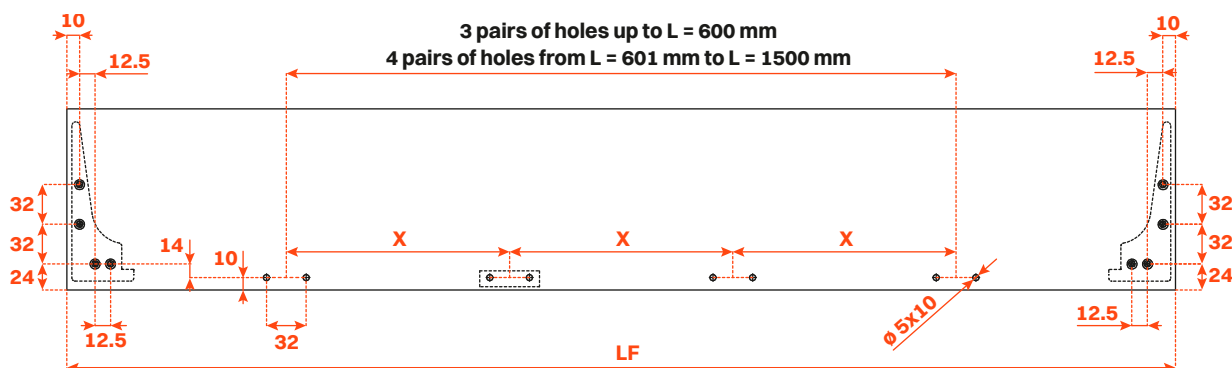

Runner length (LN) mm	Drawer width (L) mm	Frontal width (LF) mm	Internal width (L1) mm	Drawer depth (P) mm + wooden frontal 12 mm	Drawer depth (P) mm + wooden frontal 19 mm	Internal depth (P1) mm
400	LV - 15	LV - 6	L - 80	440	447	386
450				490	497	436
470				510	517	456