






Luxer Wall
technical information

Luxer Wall


Standard upright profiles

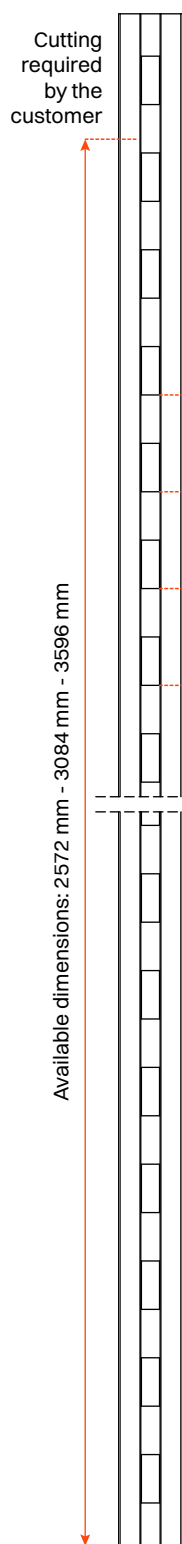

Before proceeding with the cutting, verify that the position of the slot for the insertion of the electrified track (optional) is on the right as indicated in the drawing.

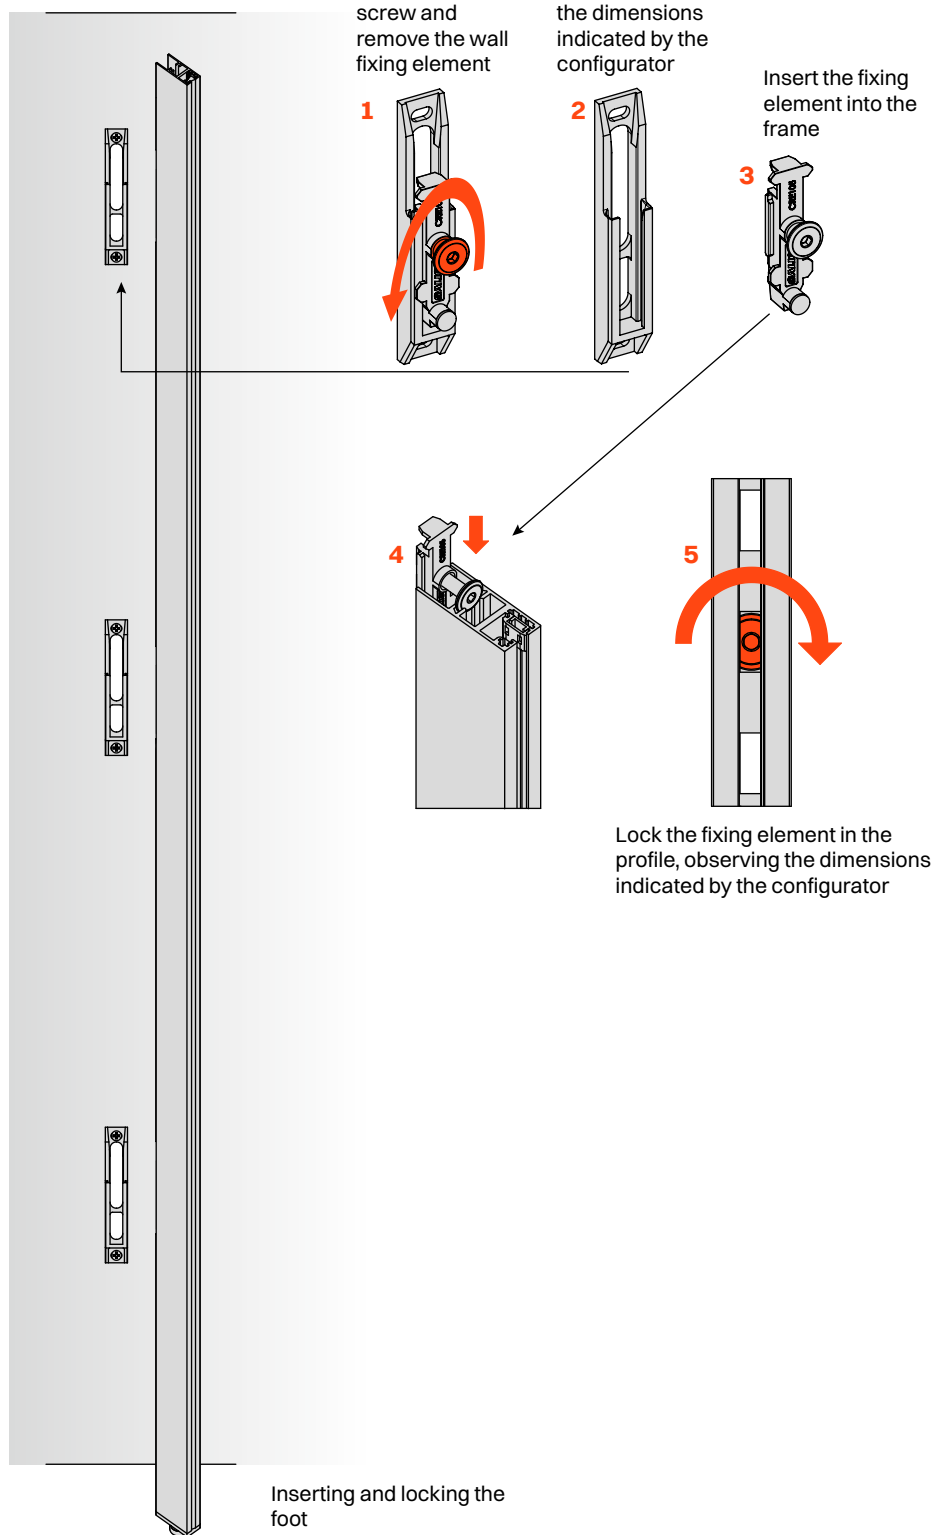


Electrified upright profile for shelves with LED light

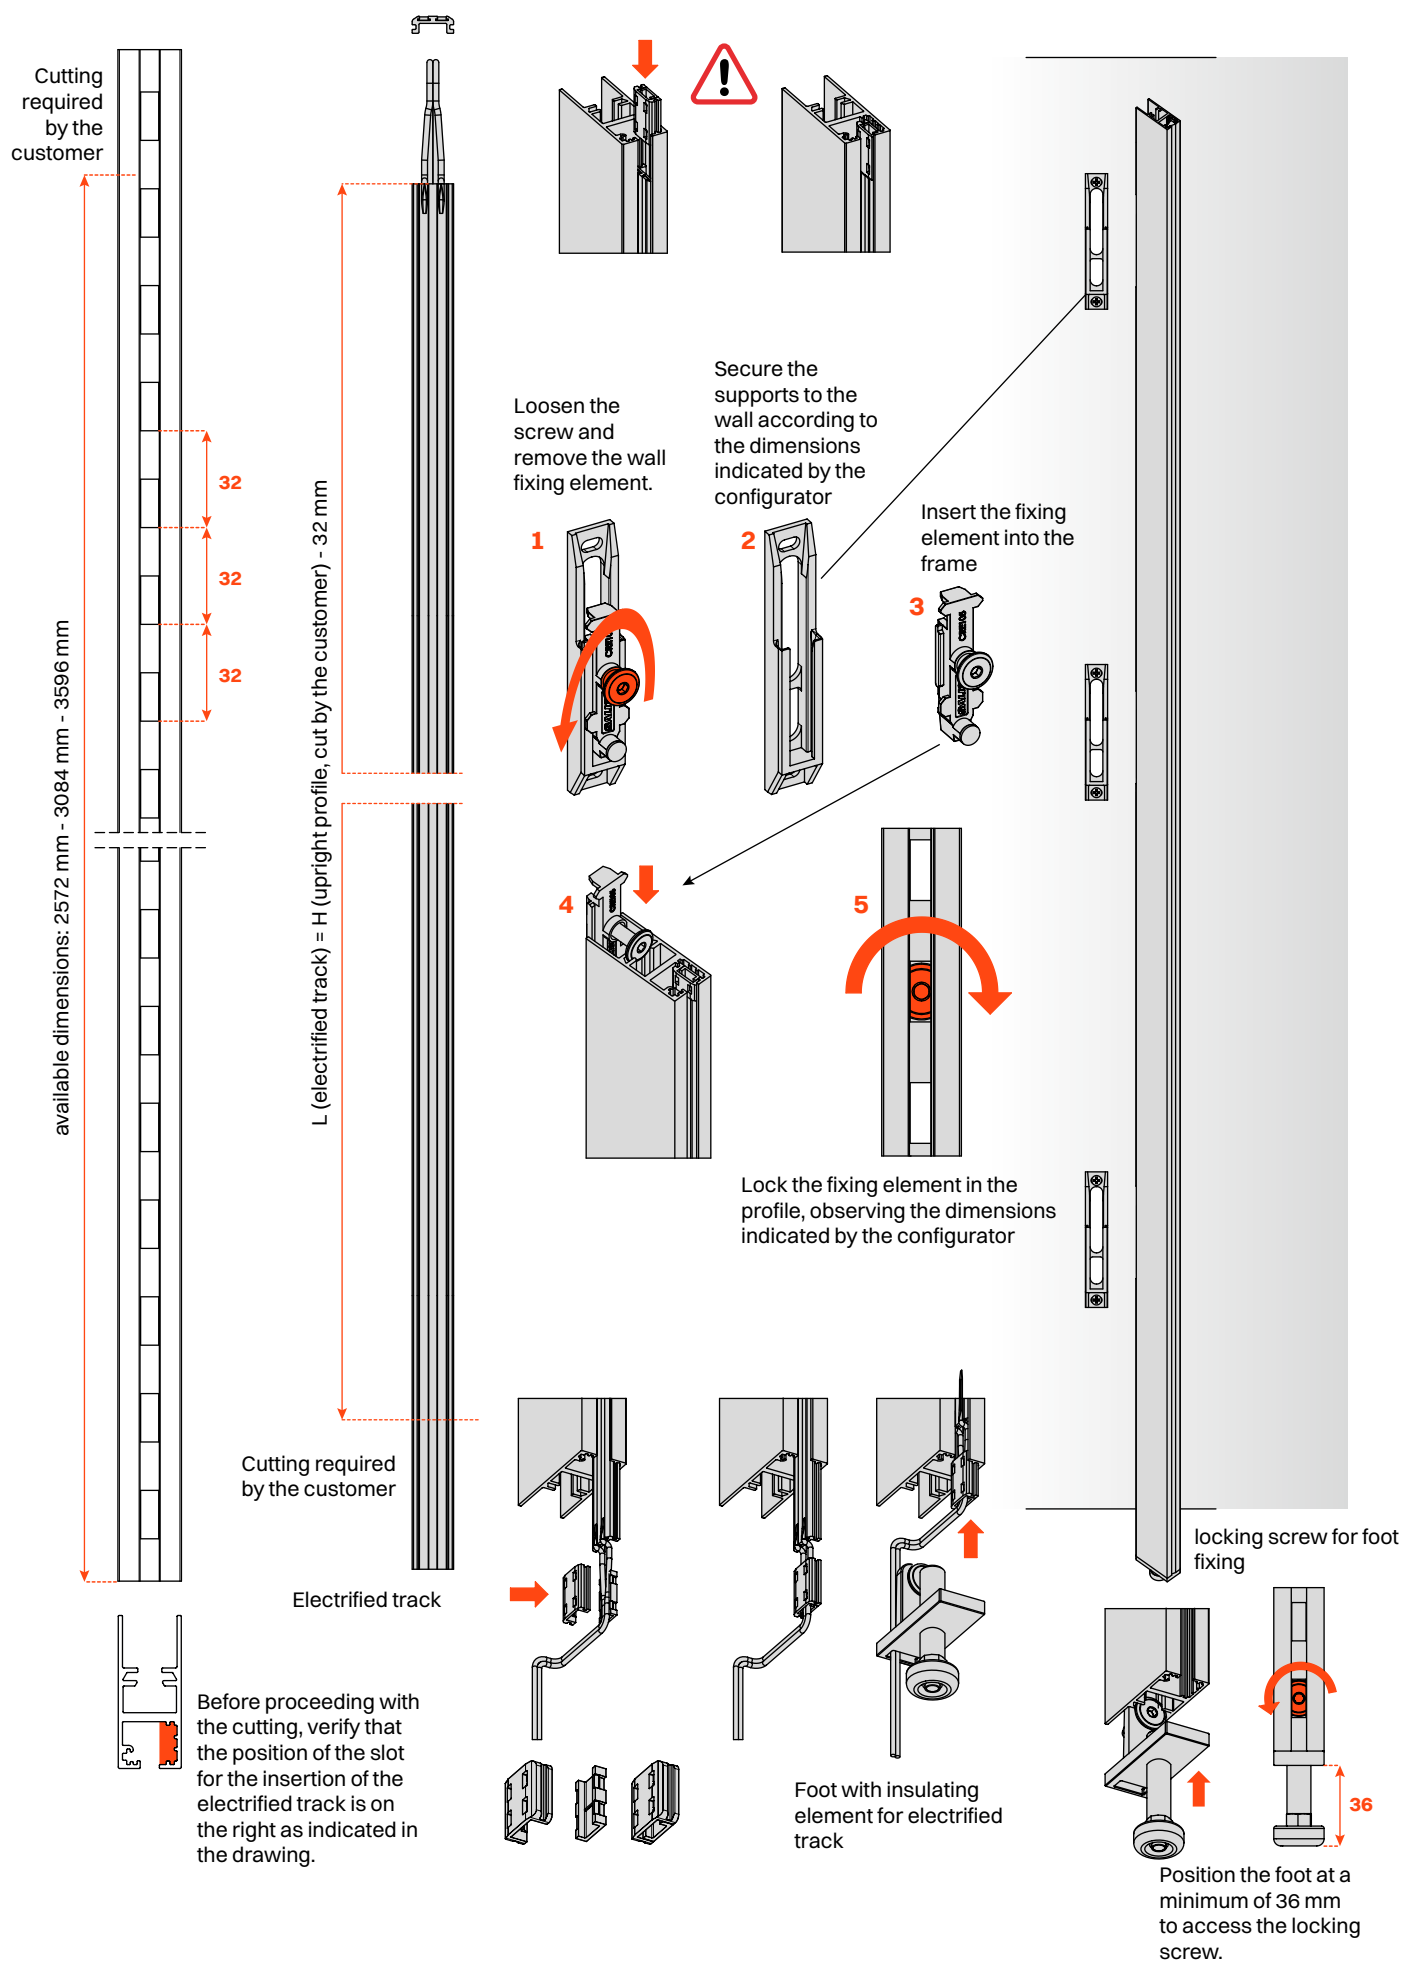

Luxer Wall


Wall mounting of upright profile

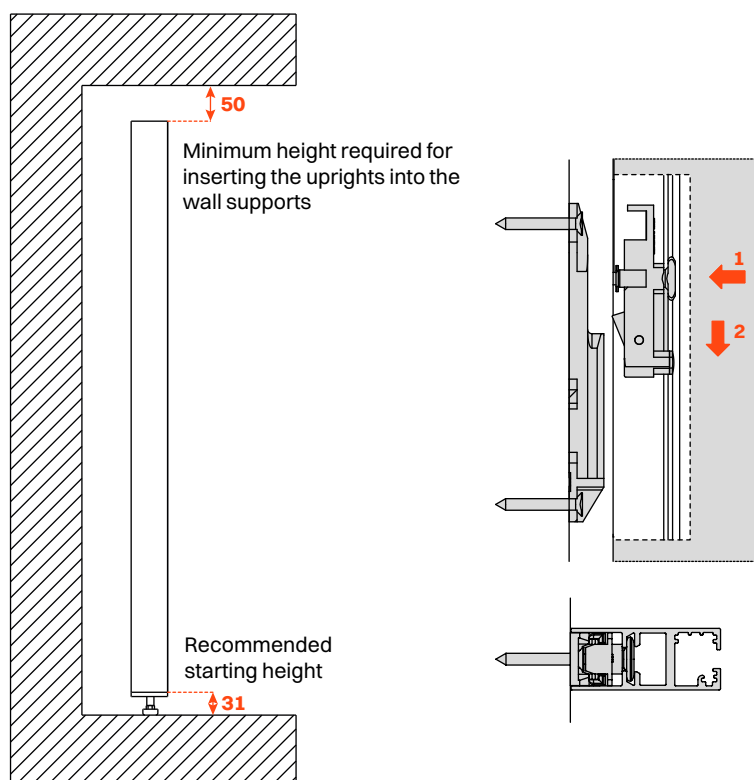

Wall fixing of the first upright profile and location of the supports


We suggest that the parallelism between the slots is checked by inserting 2 brackets

For the perfect alignment of the upright profiles see the chapter "Adjustments"


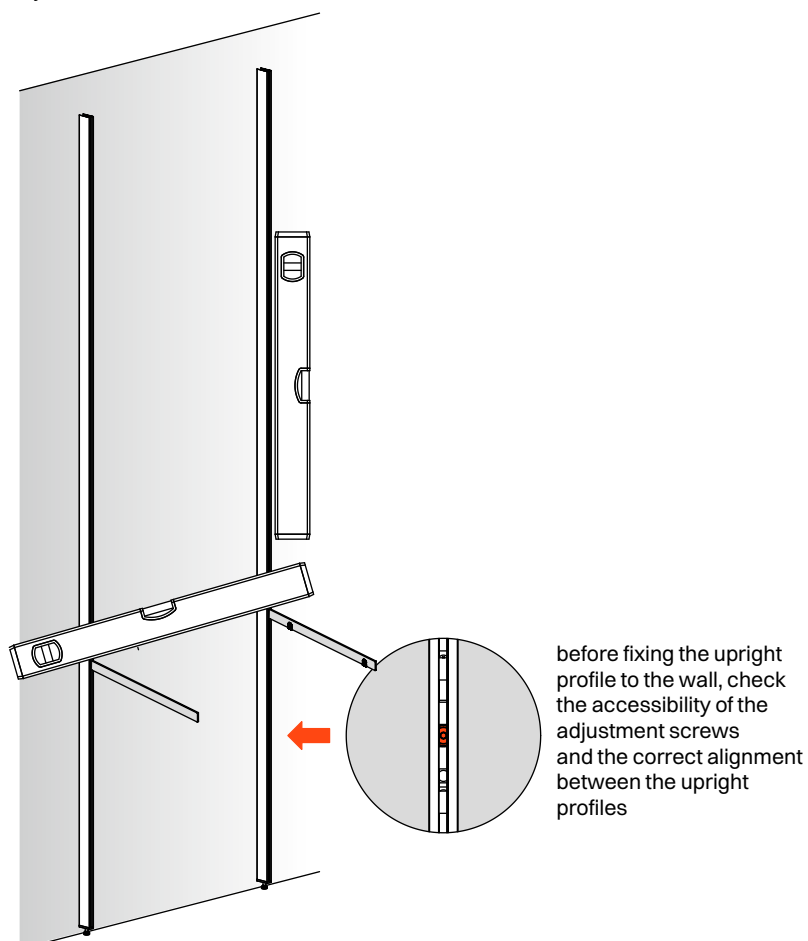


Adjustments



Height adjustment of the foot

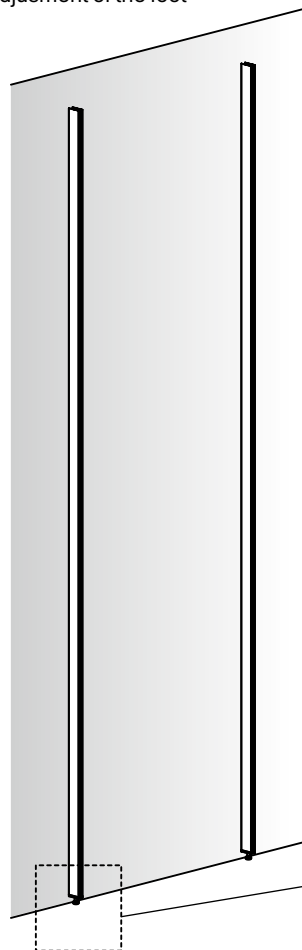



Depth adjustment of the single upright profile

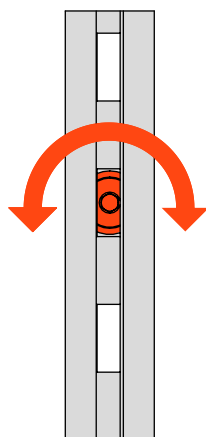

Sideways adjustment of the single upright profile

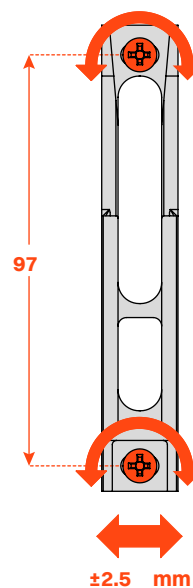

31 mm Recommended starting height
± 12 mm

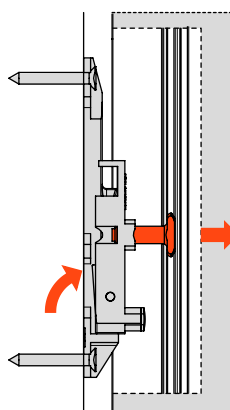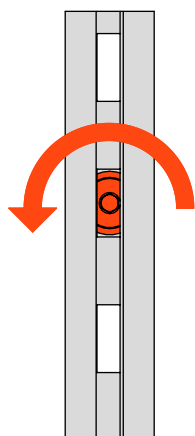

Completely
unscrew the
fixing screw

