


*Hinge for wooden doors*

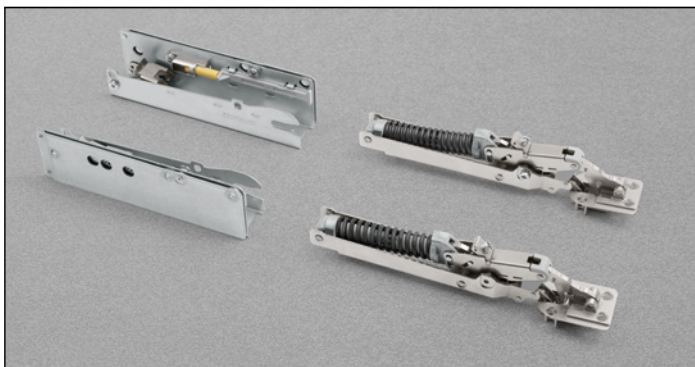


## Technical information


**Flap door lift hinge, fixed to the cabinet side.**

Drilling of the door ø35.  
12 mm deep cup.  
85° opening with stop device (premounted).  
94° opening without stop device.  
Possible drilling distance on the door (K): from 3 to 7 mm.  
Also available in Push to open version for handle-less doors.

## Drilling patterns.

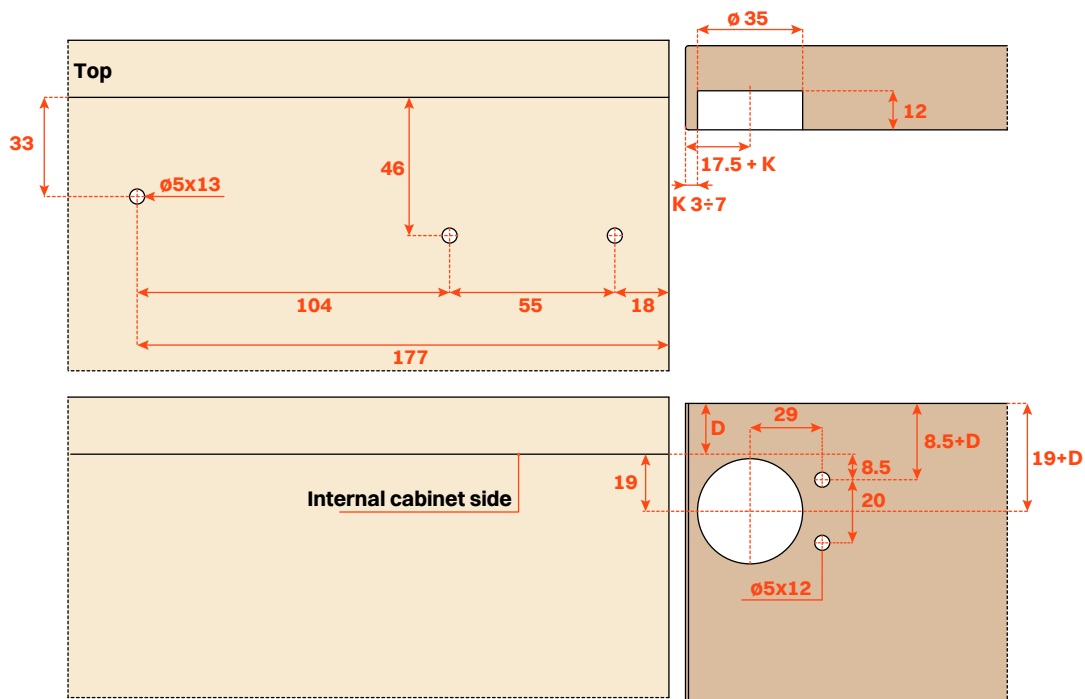


Space needed to open the door.

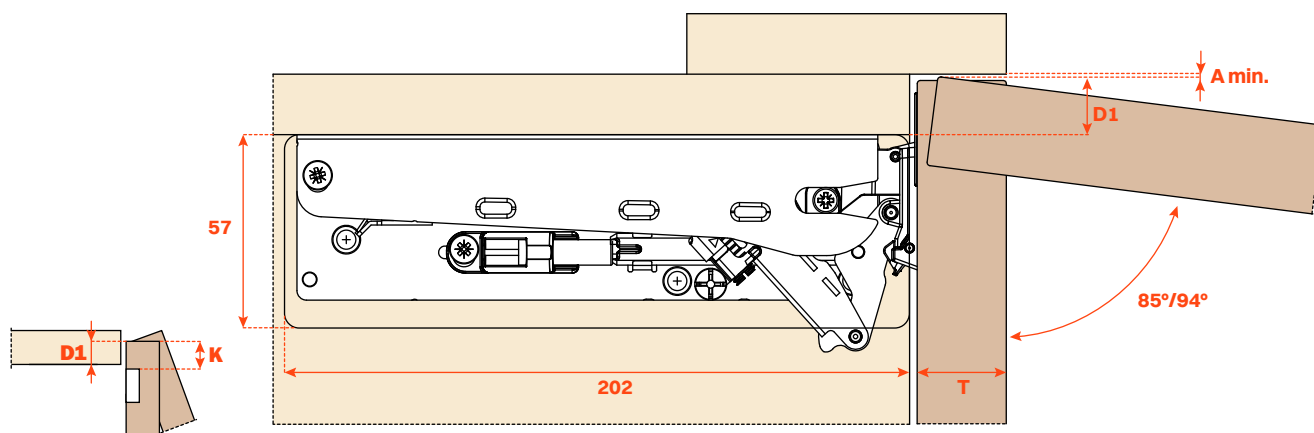

K		D1
3	=	16
4	=	17
5	=	18
6	=	19
7	=	20

	T=	16	17	18	19	20	21	22	23	24	25	26	27	28
K=3	<b>A = min</b>	0	0.1	0.1	0.2	0.2	0.3	0.5	0.6	0.7	0.9	1.1	1.8	2.7
K=4	<b>A = min</b>	0	0.1	0.1	0.2	0.2	0.3	0.4	0.6	0.7	0.9	1.1	1.3	2.1
K=5	<b>A = min</b>	0	0.1	0.1	0.2	0.2	0.3	0.4	0.6	0.7	0.9	1.1	1.3	1.5
K=6	<b>A = min</b>	0	0.1	0.1	0.2	0.2	0.3	0.4	0.6	0.7	0.9	1.0	1.2	1.5
K=7	<b>A = min</b>	0	0.1	0.1	0.2	0.2	0.3	0.4	0.6	0.7	0.8	1.0	1.2	1.4

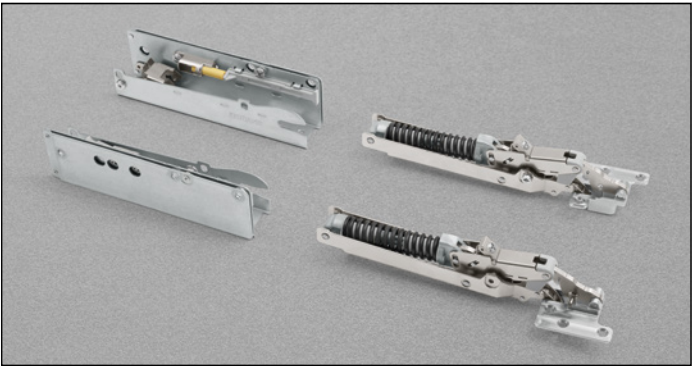


Technical information



Flap door lift hinge, fixed to the cabinet side.

12 mm deep cup.  
85° opening with stop device (premounted).  
94° opening without stop device.  
Possible drilling distance on the door (K): from 1.5 to 7 mm.  
Also available in Push to open version for handle-less doors

Drilling patterns.

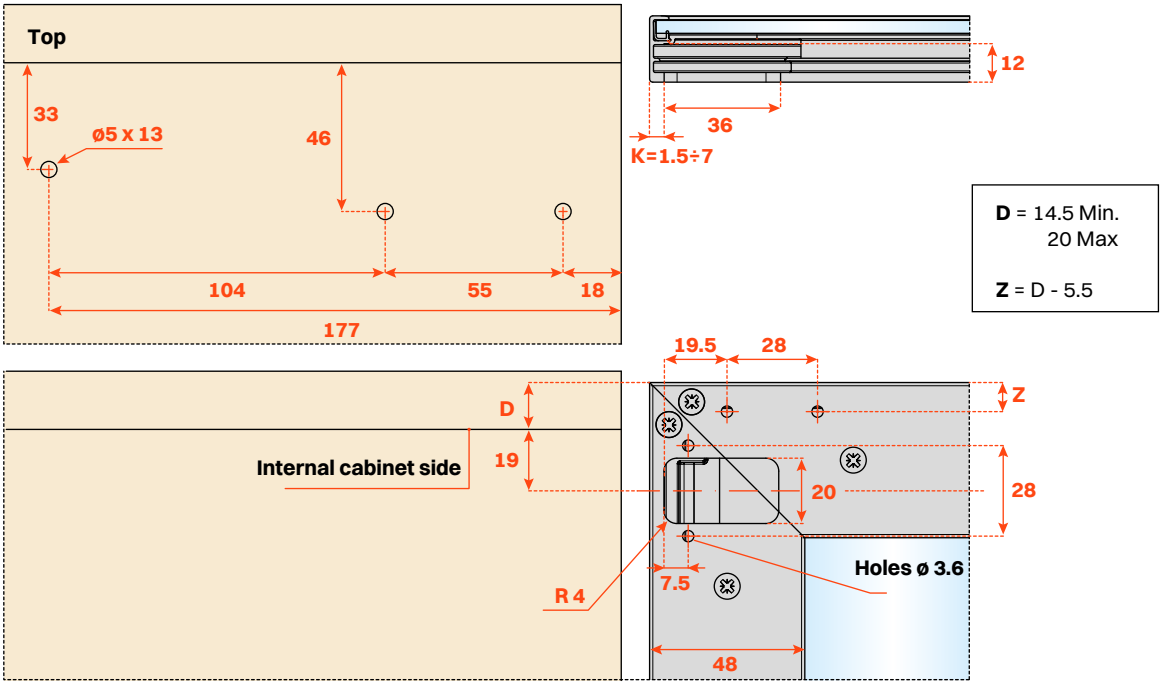

Space needed to open the door.

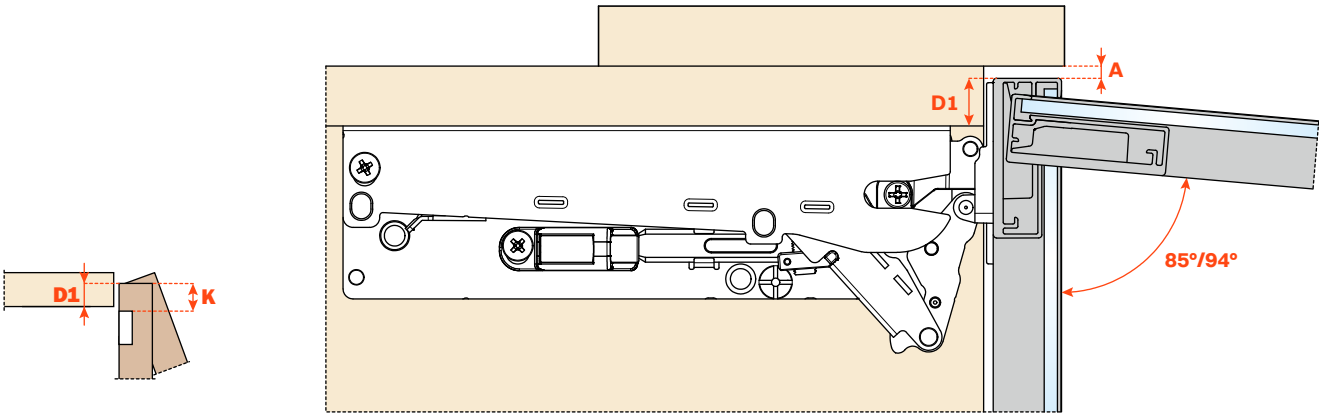

K		D1
1.5	=	14.5
3	=	16
4	=	17
5	=	18
6	=	19
7	=	20