








Conecta - Concealed hinge



A perfect synthesis of compactness and adaptability. **Conecta** is the totally innovative Salice hinge that is completely hidden inside the door and the side of the cabinet. Its technical characteristics allow it to manage the opening and closing movements with precision and fluidity even with large and heavy furniture doors in both wood and aluminium.

The **Conecta** hinge, with its 94° opening, is fully adjustable in three directions by cam adjusters and is also available with an integrated soft close mechanism for decelerated closing.

Its refined aesthetics, completed by customisable cover caps available for both the door and the side of the cabinet and by the elegant nickel-plated and titanium finishes, combined with the high build quality, make the **Conecta** hinge suitable for applications with exceptional elegance and functionality.






Conecta • Hinge for wooden doors

Concealed CQA3JE hinge with recessed insertion in the door and in the side.

Door overlay on the side 10 mm with holder DQG5 Door overlay on the side 12,5 mm with holder DQG3


Sideways adjustment -1 +2 mm Height adjustment -2,5 +2,5 mm Depth adjustment 0 +3 mm

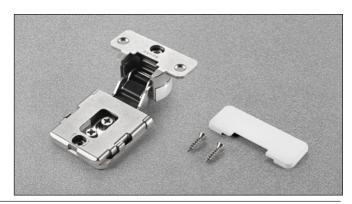


Concealed CQA3KE hinge with recessed insertion in the door and in the side.

Door overlay on the side 14 mm with holder DQG5. Door overlay on the side 16,5 mm with holder DQG3.

Sideways adjustment -1 +2 mm Height adjustment -2,5 +2,5 mm Depth adjustment 0 +3 mm



Approx. number of hinges required according to the door dimension and weight

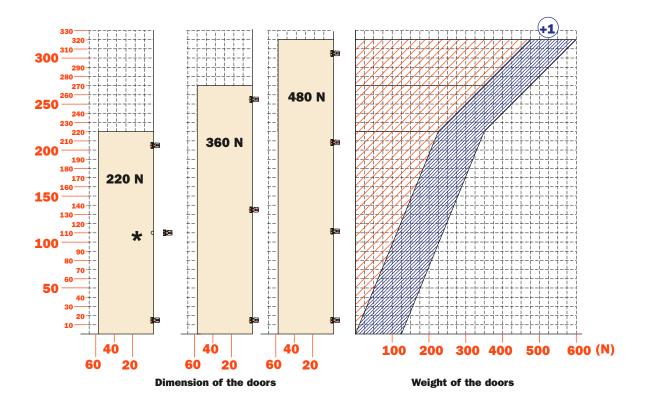

Conecta • Hinge for aluminium-framed doors

Concealed CQZ3JE hinge with recessed insertion in the door and in the side.


Door overlay on the side 10 mm with holder DQG5 Door overlay on the side 12,5 mm with holder DQG3

Sideways adjustment -2 +0,5 mm Height adjustment -2,5 +2,5 mm Depth adjustment 0 +3 mm


Concealed CQZ3KE hinge with recessed insertion in the door and in the side.

Door overlay on the side 14 mm with holder DQG5. Door overlay on the side 16,5 mm with holder DQG3.


Sideways adjustment -2 +0,5 mm Height adjustment -2,5 +2,5 mm Depth adjustment 0 +3 mm



Approx. number of hinges required according to the door dimension and weight

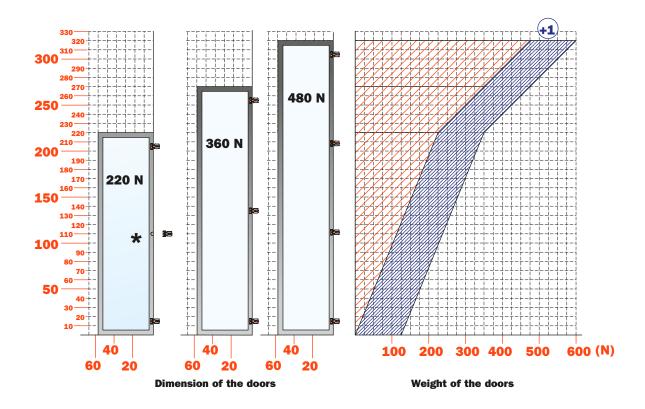

Conecta • Hinge for wooden doors




Technical features

Concealed Conecta CQA3JE hinge with recessed insertion in the door and in the side.


Rapid fixing of the door to the cabinet side 22 mm deep metal cup Drilling distance fixed at 10 mm from the edge of the door to the centre of the hole Diameter 35 mm L = 3,5 mm 94° opening

Space needed to open the door




| T= | 25 | 26 | 27 | 28 | 29 | 30 |
|----|-----|-----|-----|-----|-----|-----|
| A= | 2.4 | 3.1 | 4.0 | 4.7 | 5.5 | 6.3 |

Fixing into the side and projection of the door

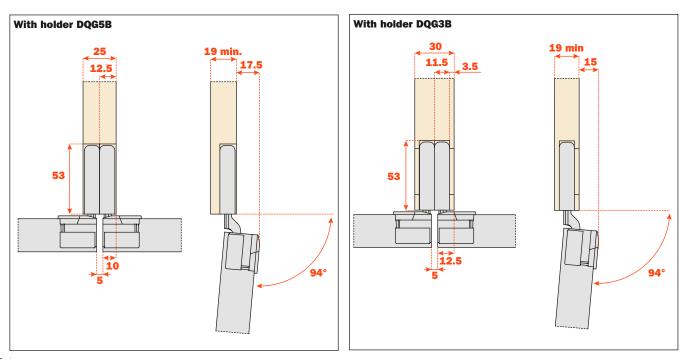

Workings on door and cabinet

Holder DQG5B




- For single door

- For double doors and side thickness 25 mm

To be screw-fixed to the cabinet side:

- For single door with Euroscrews, drilling ø5x16 mm For double doors with ø5 mm interscrews
- Fixing screws and cover caps included in the single packing
- Fixing screws included in the industrial packing

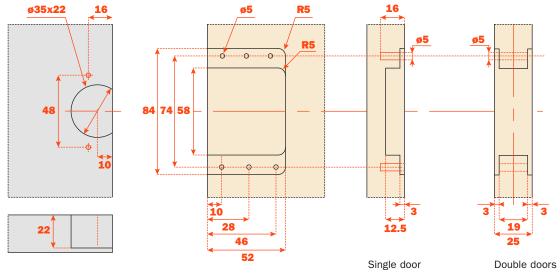

Holder DQG3B




- For single door


- For double doors and side thickness 30 mm

To be screw-fixed to the cabinet side:

- For single door and for double doors with screws ø4x25 mm
- Fixing screws and cover caps included in the single packing
- Fixing screws included in the industrial packing

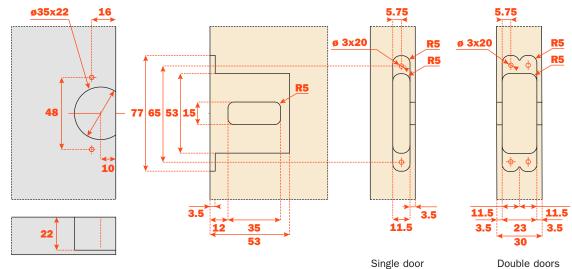

Conecta • Hinge for wooden doors




Technical features

Concealed Conecta CQA3KE hinge with recessed insertion in the door and in the side.


Rapid fixing of the door to the cabinet side 22 mm deep metal cup Drilling distance fixed at 10 mm from the edge of the door to the centre of the hole Diameter 35 mm L = 3,5 mm 94° opening

Space needed to open the door




| T= | 25 | 26 | 27 | 28 | 29 | 30 |
|----|-----|-----|-----|-----|-----|-----|
| A= | 2.4 | 3.1 | 4.0 | 4.7 | 5.5 | 6.3 |

Fixing into the side and projection of the door

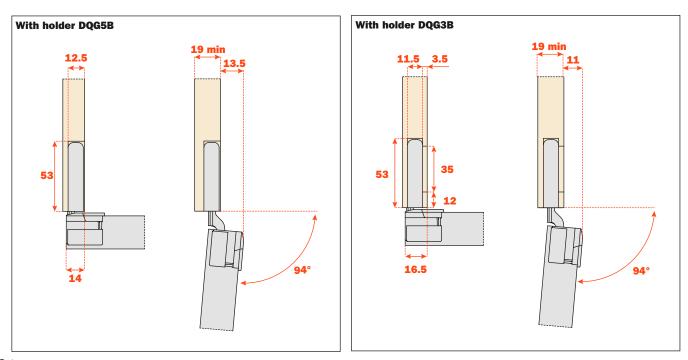

Workings on door and cabinet


Holder DQG5B

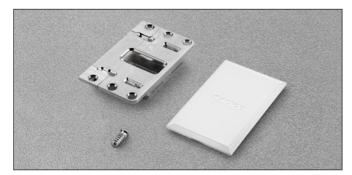

- For single door

To be screw-fixed to the cabinet side:

- For single door with Euroscrews, drilling ø5x16 mm
- Fixing screws and cover caps included in the single packing
- Fixing screws included in the industrial packing

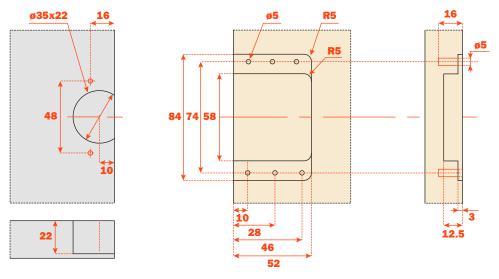


Holder DQG3B




- For single door

- To be screw-fixed to the cabinet side:
- For single door with screws ø4x25 mm
- Fixing screws and cover caps included in the single packing
- Fixing screws included in the industrial packing

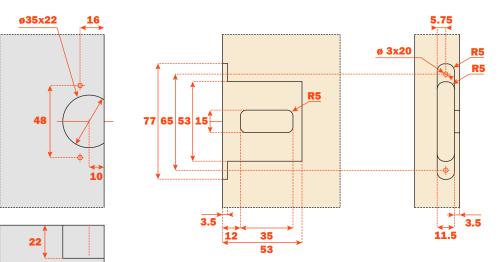

Conecta • Hinge for aluminium-framed doors




Technical features

Concealed Conecta CQZ3JE hinge with recessed insertion in the door and in the side


Rapid fixing of the door to the cabinet side For aluminium-framed doors 24 mm deep metal cup L = 3,5 mm 94° opening

Space needed to open the door



| T= | 25 | 26 | 27 | 28 | 29 | 30 |
|----|-----|-----|-----|-----|-----|-----|
| A= | 2.4 | 3.3 | 4.2 | 5.2 | 6.1 | 7.1 |

Fixing into the side and projection of the door

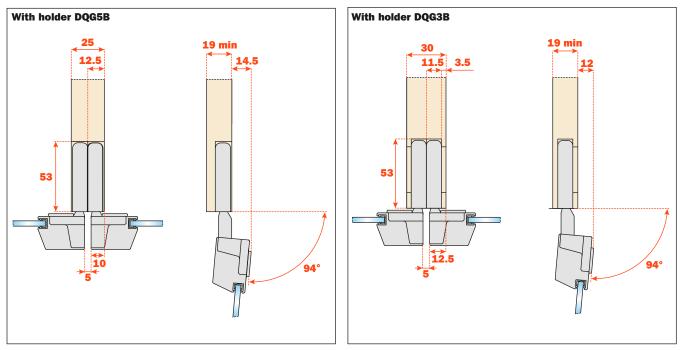


Workings on door and cabinet


Holder DQG5B



Drilling with corner connector DQZ3HS5V04

Drilling with corner connector **DEL6BSFV02**






- For single door


- For double doors and side thickness 25 mm

To be screw-fixed to the cabinet side:

- For single door with Euroscrews, drilling ø5x16 mm - For double doors with ø5 mm interscrews
- Fixing screws and cover caps included in the single packing
- Fixing screws included in the industrial packing



Holder DQG3B





- For single door - For double doors and side thickness 30 mm
- To be screw-fixed to the cabinet side:
- For single door and for double doors with screws ø4x25 mm
- Fixing screws and cover caps included in the single packing
- Fixing screws included in the industrial packing






70



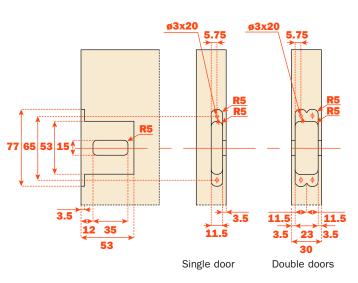

Conecta • Hinge for aluminium-framed doors




Technical features

Concealed Conecta CQZ3KE hinge with recessed insertion in the door and in the side


Rapid fixing of the door to the cabinet side For aluminium-framed doors 24 mm deep metal cup L = 3,5 mm 94° opening

Space needed to open the door



| T= | 25 | 26 | 27 | 28 | 29 | 30 |
|----|-----|-----|-----|-----|-----|-----|
| A= | 2.4 | 3.3 | 4.2 | 5.2 | 6.1 | 7.1 |

Fixing into the side and projection of the door

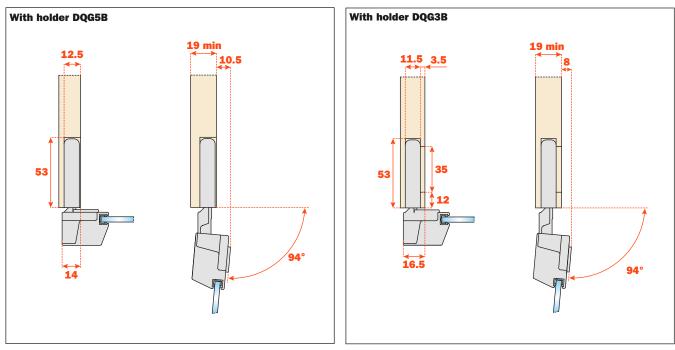


Workings on door and cabinet

Holder DQG5B



Drilling with corner connector **DQZ3HS5V04**

Drilling with corner connector **DEL6BSFV02**




10 48.5 <u>ø3.6</u> 21 R4 36 24 R4 38 48

15 1.5 26.7


- For single door

To be screw-fixed to the cabinet side:

- For single door with Euroscrews, drilling ø5x16 mm
- Fixing screws and cover caps included in the single packing
- Fixing screws included in the industrial packing



Holder DQG3B



- For single door

To be screw-fixed to the cabinet side:

- For single door with screws ø4x25 mm
- Fixing screws and cover caps included in the single packing
- Fixing screws included in the industrial packing

Drilling with corner connector **DQZ3HS5V04**

Drilling with corner connector **DEL6BSFV02**

ø3.6

24

10.2

70


48.5


38 48

15 1.5


•

26.7







Conecta • Assembly • Single door with holder DQG5B



Fix the holder to the cabinet side using the Euroscrews

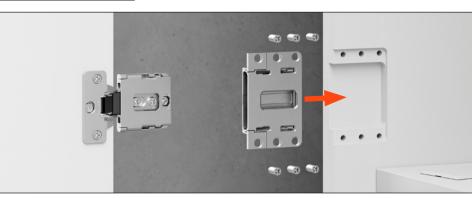

Fully insert the hinge into the holder

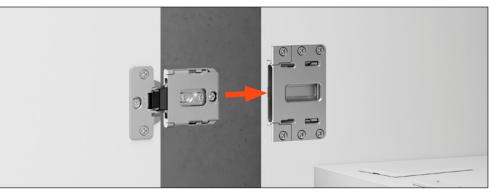

Once fully inserted, lock the hinge into place using the back cam






Apply the flange and the screw cover caps

Fix the holders to the cabinet side using the interscrews



Fully insert the hinges into the holders

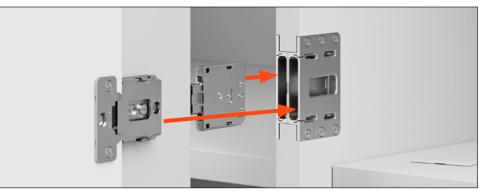






Once fully inserted, lock the hinges into place using the back cam

Apply the flange and the screw

cover caps


Conecta • Assembly • Single door with holder DQG3B



Fix the holder to the cabinet side using the woodscrews



Fully insert the hinge into the holder

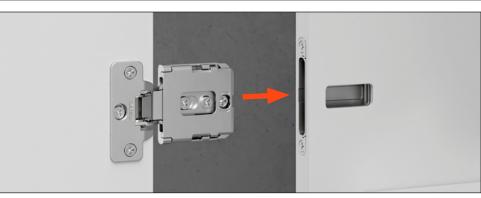


Once fully inserted, lock the hinge into place using the back cam







Apply the flange and the screw cover caps

Fix the holders to the cabinet side using the woodscrews

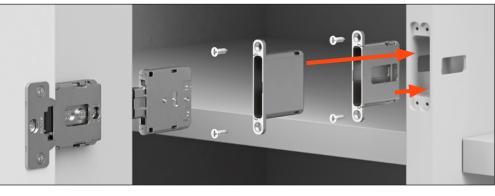

Fully insert the hinges into the holders

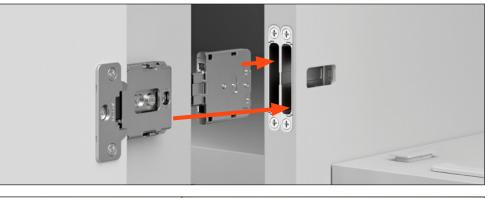








Apply the flange and the screw cover caps

Conecta - Adjustments • Holder DQG5B

Sideways adjustment for hinge for wooden doors: from -1 to +2



Sideways adjustment for hinge for aluminium-framed doors: from -2 to +0,5





Height adjustment for hinge for wooden doors: from -2,5 to +2,5



Height adjustment for hinge for aluminium-framed doors: from -2,5 to +2,5





Depth adjustment for hinge for wooden doors: from 0 to +3



Depth adjustment for hinge for aluminium-framed doors: from 0 to +3












Holder DQG3B

Sideways adjustment for hinge for wooden doors: from -1 to +2



Sideways adjustment for hinge for aluminium-framed doors: from -2 to +0,5





Height adjustment for hinge for wooden doors: from -2,5 to +2,5



Height adjustment for hinge for aluminium-framed doors: from -2,5 to +2,5






Depth adjustment for hinge for wooden doors: from 0 to +3



Depth adjustment for hinge for aluminium-framed doors: from 0 to +3











Conecta - Packing

| Hinge with Nickel-plated finish | Hinge with Titanium finish | INDUSTRIAL packing |
|--|--|------------------------|
| For wooden doors · Door overlay: 1 | 0 mm (DQG5) - 12,5 mm (DQG3) | |
| CQA3JE9XXI | CQA3JE6XXI | |
| | | |
| For wooden doors · Door overlay: 1 | | |
| CQA3KE9XXI | CQA3KE6XXI | |
| | | Boxes 100 pcs. |
| For aluminium-framed doors · Door overla | ay: 10 mm (DQG5) - 12,5 mm (DQG3) | Pallets 24 boxes |
| CQZ3JE9XXI | CQZ3JE6XXI | Fixing screws included |
| A CONTRACTOR | A A A A A A A A A A A A A A A A A A A | |
| For aluminium-framed doors · Door overla | | |
| CQZ3KE9XXI | CQZ3KE6XXI | |
| the second secon | and the second s | |

| Holder with Nickel-plated finish | Holder with Titanium finish | INDUSTRIAL packing |
|----------------------------------|-----------------------------|--|
| DQG5BX9XI | DQG5BX6XI | |
| | 20 | Boxes 100 pcs. Pallets 24 boxes Fixing screws included |

| Holder with Nickel-plated finish | Holder with Titanium finish | INDUSTRIAL packing |
|----------------------------------|-----------------------------|--|
| DQG3BX9XI | DQG3BX6XI | |
| | | Boxes 100 pcs. Pallets 24 boxes Fixing screws included |

| Hinge with Nickel-plated finish | Hinge with Nickel-plated finish Hinge with Titanium finish | |
|--|--|---|
| For wooden doors • Door overlay: 2 | L0 mm (DQG5) - 12,5 mm (DQG3) | |
| CQA3JE9XXV | CQA3JE6XXV | - |
| | | |
| For wooden doors · Door overlay: | | - |
| CQA3KE9XXV | CQA3KE6XXV | |
| | | Bags 2 pcs. Boxes with 25 bags Pallets 24 boxes |
| For aluminium-framed doors • Door over | | • |
| CQZ3JE9XXV | CQZ3JE6XXV | Fixing screws and flange cover cap included |
| For aluminium-framed doors · Door over | ay: 14 mm (DQG5) - 16,5 mm (DQG3) | |
| CQZ3KE9XXV | CQZ3KE6XXV | |
| | | |
| Holder with Nickel-plated finish | Holder with Titanium finish | SINGLE packing |
| DQG5BX9XS | DQG5BX6XS | |

| • | | |
|---|-----------------------------|--|
| DQG5BX9XS | DQG5BX6XS | |
| | 200 | Bags 2 pcs. Boxes with 25 bags Pallets 24 boxes Fixing screws and screw cover cap included |
| Holder with Nickel-plated finish | Holder with Titanium finish | SINGLE packing |
| DQG3BX9XS | DQG3BX6XS | |
| | | |




Conecta - Screw cover caps with Salice printed logo Symmetrical plastic screw cover caps with Salice printed logo.

| Screw cover caps DQG3B | Screw cover caps DQG5B | Packing |
|---------------------------|---------------------------|---|
| PQFXAA1SN | PQF5AA1SN | |
| White | White | _ |
| | | Boxes 100 pcs. |
| | | Large Boxes 600 pcs. |
| PQFXAA3SN | PQF5AA3SN | |
| Black | Black | |
| | | Boxes 100 pcs. • Large |
| | 4 | Boxes 600 pcs. |
| PQFXAA6SN | PQF5AA6SN | |
| Titanium | Titanium | Boxes 100 pcs. Large Boxes 600 pcs. |
| PQFXAA9SN | PQF5AA9SN | |
| Satin Chrome | Satin Chrome | Boxes 100 pcs. Large Boxes 600 pcs. |
| PQFXAAWSN | PQF5AAWSN | |
| Satin Gold | Satin Gold | Boxes 100 pcs. Large Boxes 600 pcs. |

Screw cover caps and flange cover caps

Symmetrical plastic screw cover caps. They can be personalised on request with silk-screen printed logo. Plastic flange cover caps.

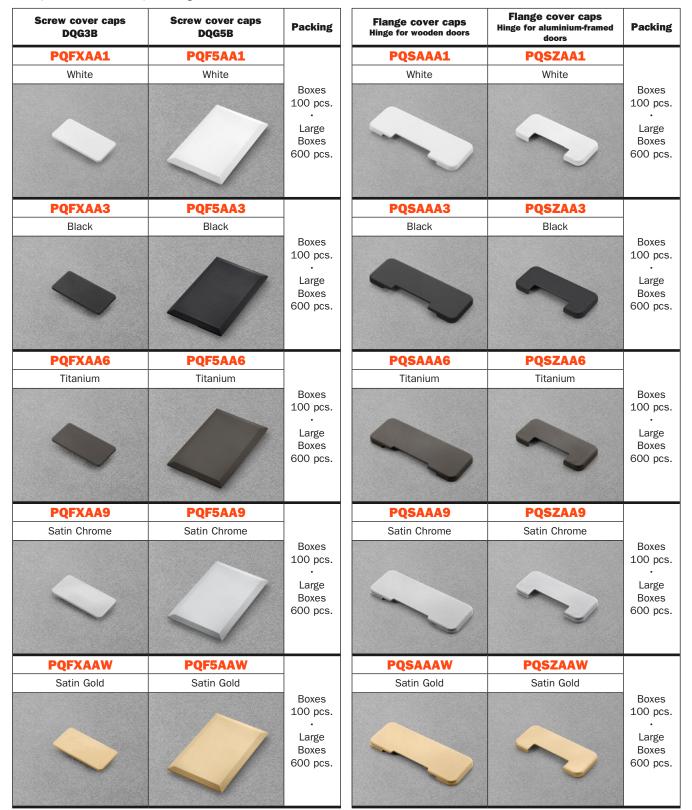



Conecta - Accessories

| Steel corner connectors for the assembly of the aluminium door profile | Part number | Packing |
|---|-------------|---|
| Soo Bara | DQZ3HS5V04 | Boxes with 25 bags 1 bag contains: 4 corner connectors and assembly screws (nickel-plated and titanium finish) |
| Die-cast corner connectors for the assembly of the aluminium door profile | Part number | Packing |
| | DEL6BSFV02 | Boxes with 25 bags 1 bag contains: 4 corner connectors and assembly screws (nickel-plated and titanium finish) |

| Gasket for glass | Part number | Packing | Length |
|------------------|-------------|-------------|----------|
| | DQZ6AG3000T | 100 lengths | 3 metres |

| Aluminium door profile for glass insertion (4 mm) | Part number | Packing | Length |
|--|-------------|---|----------|
| | DQZ6LP300P | 10 profiles in Anodised Aluminium | |
| | DQZ6LP300T | 10 profiles in Titanium finish | 3 metres |
| | DQZ6LF300P | 10 profiles in Anodised Aluminium with handle | o motios |
| | DQZ6LF300T | 10 profiles in Titanium finish with handle | |



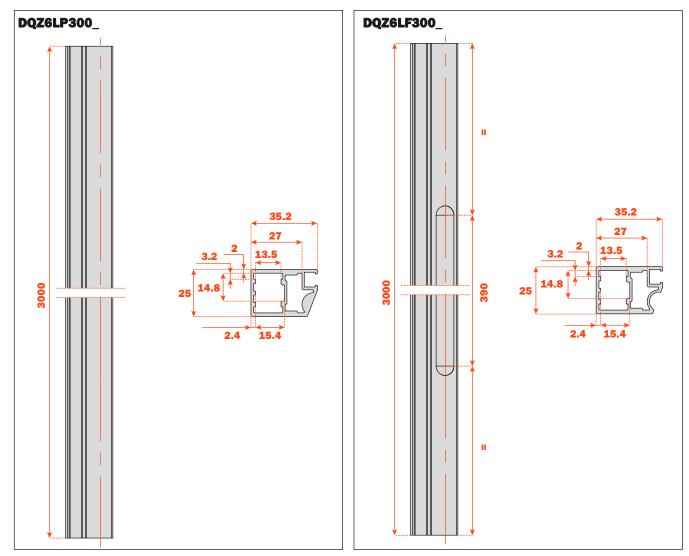



Notes

| |
|------|
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |

Notes



ARTURO SALICE S.p.A.

VIA PROVINCIALE NOVEDRATESE, 10 22060 NOVEDRATE (COMO) ITALIA TEL. 031 790424 - FAX 031 791508 info.salice@salice.com - www.salice.com

DEUTSCHE SALICE GMBH

RUDOLF DIESEL STR. 10 74382 NECKARWESTHEIM TEL. 07133 9807-0 FAX. 07133 9807-16 info.salice@deutschesalice.de www.salice.com

DEUTSCHE SALICE GMBH

VERKAUFSBÜRO NORD RINGSTRASSE 36/A30 CENTER 32584 LÕHNE TEL. 05731 15608-0 FAX. 05731 15608-10 vknord@deutschesalice.de www.salice.com

SALICE UK LTD.

KINGFISHER WAY HINCHINGBROOKE BUSINESS PARK HUNTINGDON CAMBS PE 29 6FN TEL. 01480 413831 FAX. 01480 451489 info.salice@saliceuk.co.uk www.salice.com

SALICE FRANCE S.A.R.L.

285 RUE DE GOA ZAC LES 3 MOULINS 06600 ANTIBES TEL. 0493 330069 FAX. 0493 330141 info.salice@salicefrance.com www.salice.com

SALICE ESPAÑA, S.L.U.

C/ AIGUAFREDA 4, P.I. AMÉTLLA PARK 08480 L'AMETLLA DEL VALLÈS (BARCELONA) TEL. 0034 938 46 88 61 info.salice@saliceespana.es www.salice.com

SALICE PORTUGAL UNIP. LDA

SHOWROOM: TV SÁ E MELO 161 FA 4470-116 MAIA – PORTO TEL: 00351 224 154 221 Info@saliceportugal.pt www.salice.com ARMAZÉM: VIA ROTA DOS MÓVEIS I 399 4585-325 GANDRA

SALICE CHINA (SHANGHAI) CO. LTD.

1st FLOOR, B1 BLDG 928 MINGZHU ROAD XUJING, QINGPU DISTRICT SHANGHAI 201702 - CHINA TEL. 021 3988 9880 FAX. 021 3988 9882 info.salice@salicechina.com www.salicechina.com

SALICE INDIA PVT. LTD.

1001 & 1002, 10TH FLOOR, CENTRUM, PLOT NO. C-3, OPP. WAGLE PRABHAG SAMITI OFFICE, MIDC AREA, WAGLE INDUSTRIAL ESTATE, THANE - 400604, MAHARASHTRA TEL. 022 20812050 info@saliceindia.com www.salice.com

SALICE CANADA INC.

3500 RIDGEWAY DRIVE, UNIT#1 MISSISSAUGA, ONTARIO, L5L 0B4 TEL. 905 820 8787 FAX. 905 820 7226 info.salice@salicecanada.com www.salicecanada.com

SALICE AMERICA INC.

2123 CROWN CENTRE DRIVE CHARLOTTE NC. 28227 TEL. 704 841 7810 FAX. 704 841 7808 info.salice@saliceamerica.com www.saliceamerica.com



Digital contents