



Futura

SALICE

Index

Fixing	page 5
Technical information	page 6
Part number composition	page 19
Packing	page 20




Futura Self-closing

61200	Concealed runner - part-extension	page 22
61500	Concealed runner - part-extension	page 24
65200	Concealed runner - full-extension	page 26
65500	Concealed runner - full-extension	page 28




Futura Push

61277	Concealed runner - part-extension	page 32
61577	Concealed runner - part-extension	page 34
65277	Concealed runner - full-extension	page 36
65577	Concealed runner - full-extension	page 38



Futura Smove

61250	Concealed runner - part-extension	page 42
61550	Concealed runner - part-extension	page 44
65250	Concealed runner - full-extension	page 46
65550	Concealed runner - full-extension	page 48



Accessories

Futura Push synchroniser	page 52
Stabiliser for drawers	page 59
Drawer drilling templates for Futura runners	page 60
Spacers for Futura runners	page 61
Fixing screws	page 62

FUTURA



Futura, the concealed runner produced by Salice, is suitable for all drawer opening applications, both with part- and full-extension.


It is available in three versions:

- with traditional Self-closing (see page 21);
- with Push opening in handle-less furniture (see page 31);
- with Smove decelerated closing (see page 41).




Fixing

Fixing part-extension runner on cabinet side.

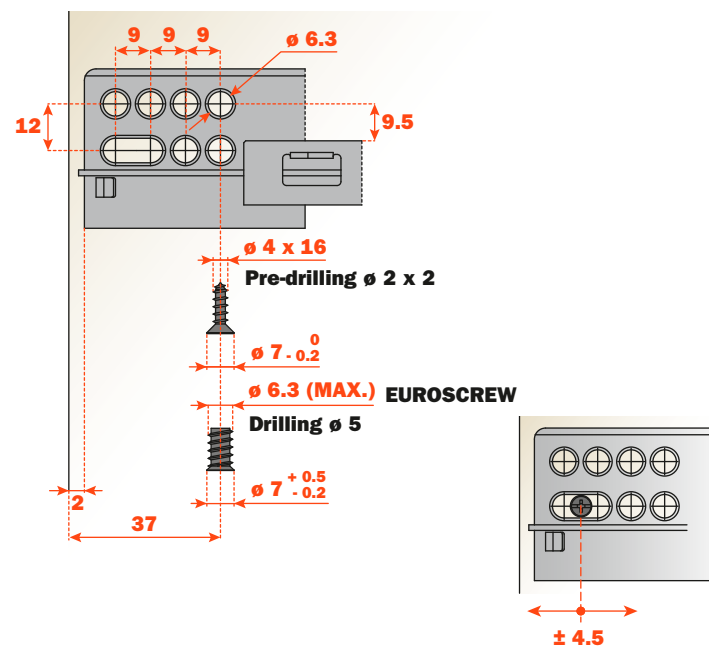


Fixing full-extension runner on cabinet side.

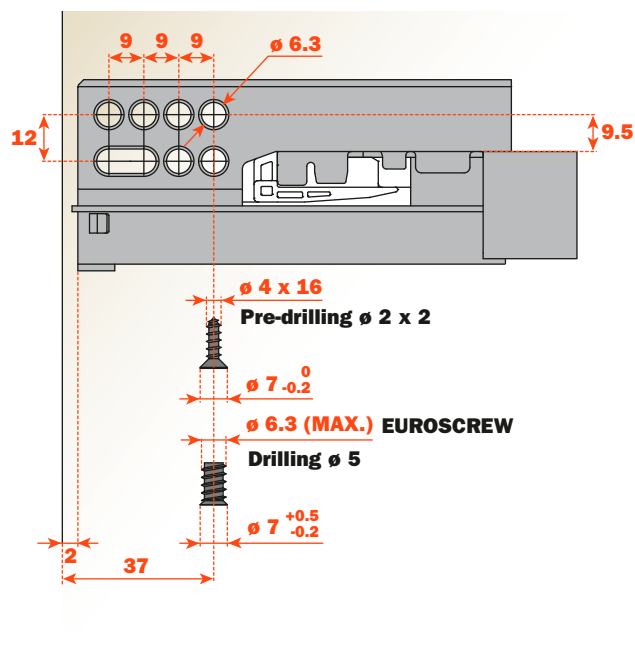


The oval slot allows the easy alignment of drawer frontals particularly in multi drawer and Push applications.


Drilling positions for runner on cabinet side. Part-extension

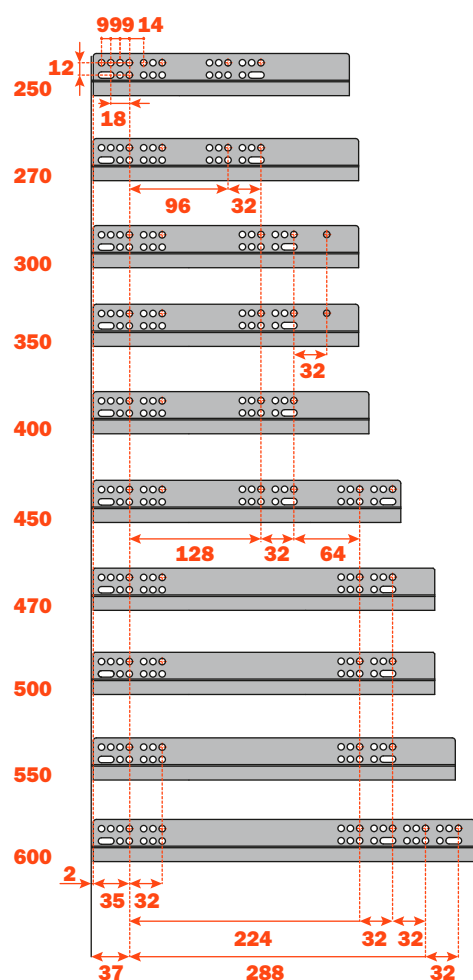

Drilling positions for runner on cabinet side. Full-extension

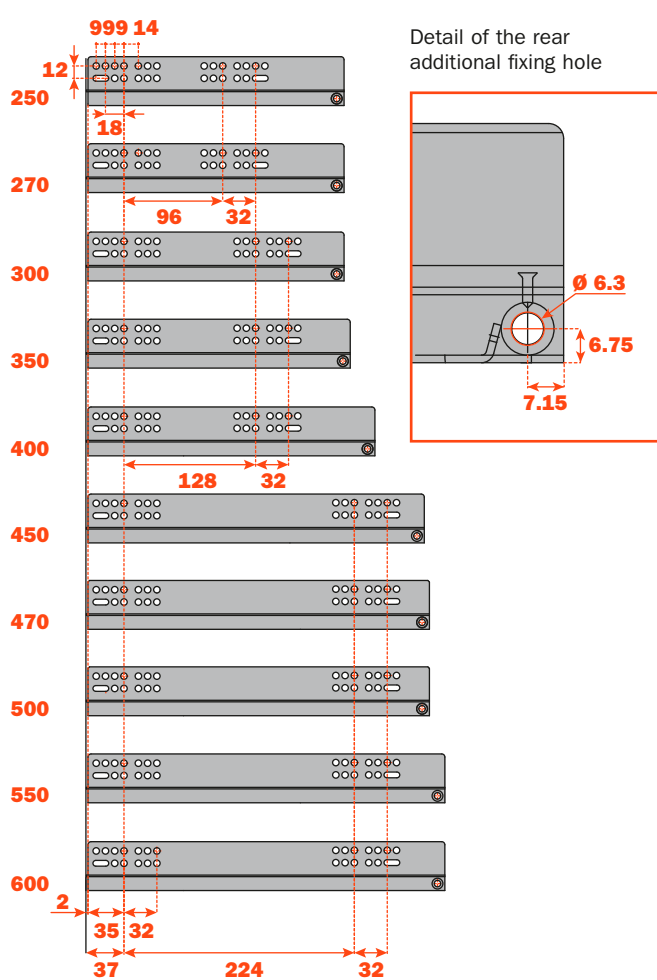


Detail of the rear additional fixing hole

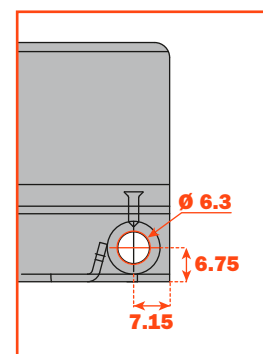

Futura - Pin fix version - Drawer setting


Abbreviations

- SP** = Thickness of the drawer
- LN** = Nominal runner length
- PM** = Depth of the cabinet
- X** = Internal width of the cabinet

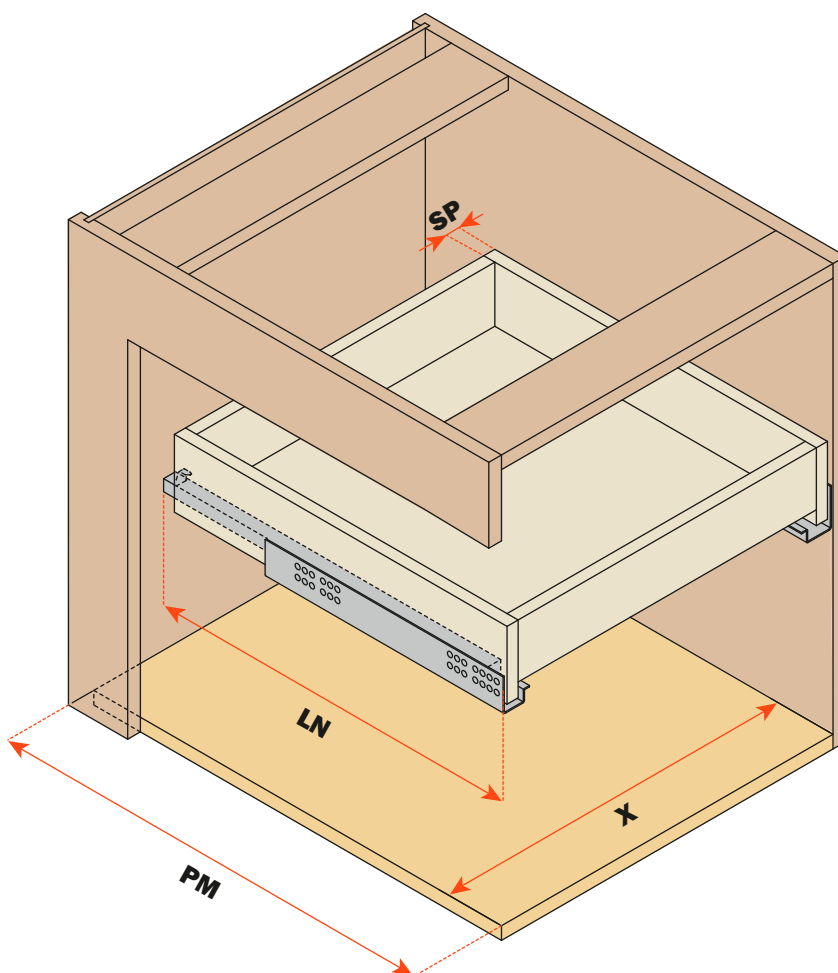

Drawer dimensions

- LC** = Runner length - 10 mm
- X - 42** = Internal width of the drawer

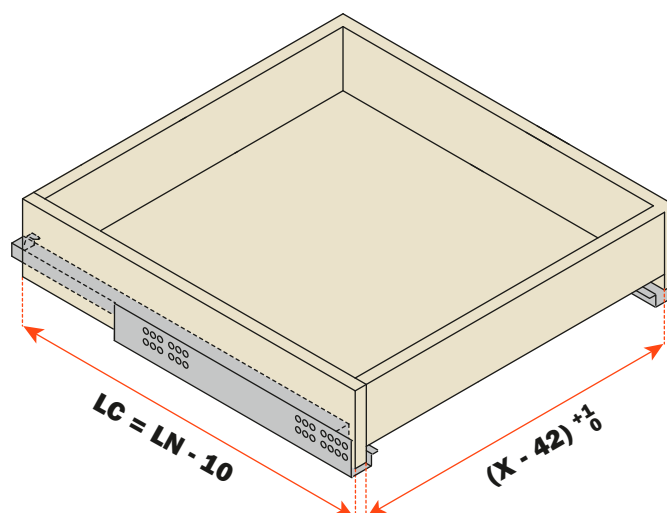


The drawer length is 10 mm shorter than the runner length


The internal width of the drawer is 42 mm less than the internal width of the cabinet

Pin fix version - Drawer drilling


Drawer with frontal - three-sided (view from below)
Template for drawer drilling - see page 60

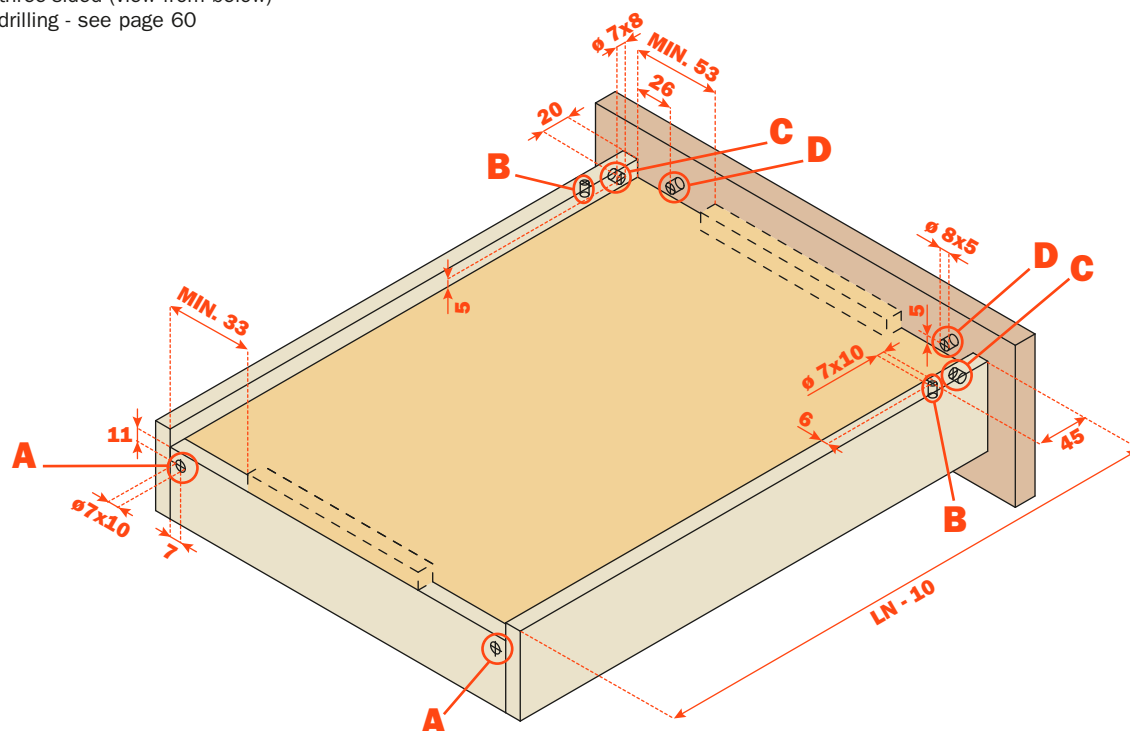


Internal drawer - four-sided (view from below)
Template for drawer drilling - see page 60

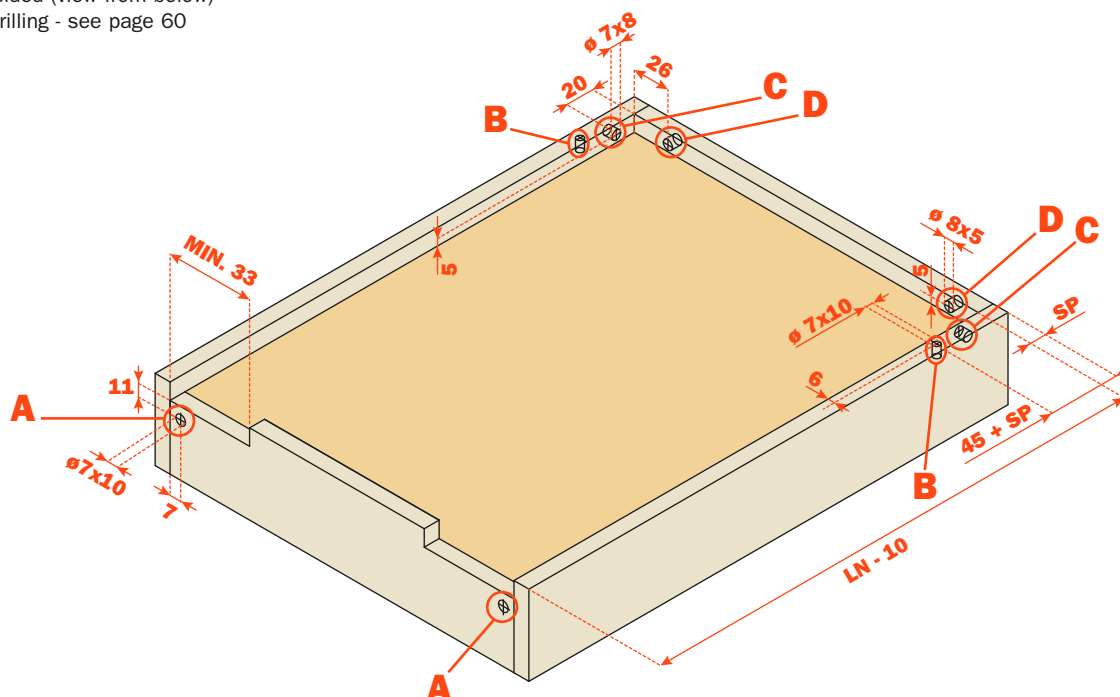


Rear hook




Drawer locating pin



Security pin - fixing to the drawer



Security pin - fixing to the frontal





Futura - Pin fix version - Technical information

Fixing of the drawer security pin

Available on all runner versions.

This operation is tool free.

The device locks the drawer onto the runners.

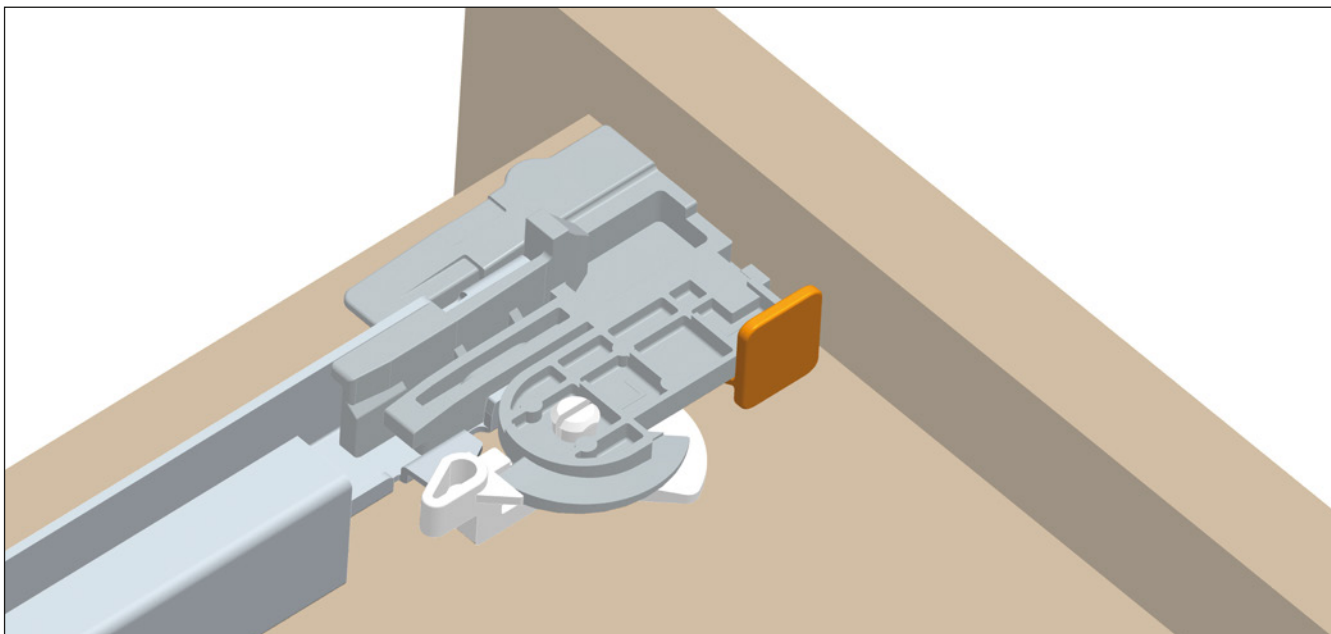
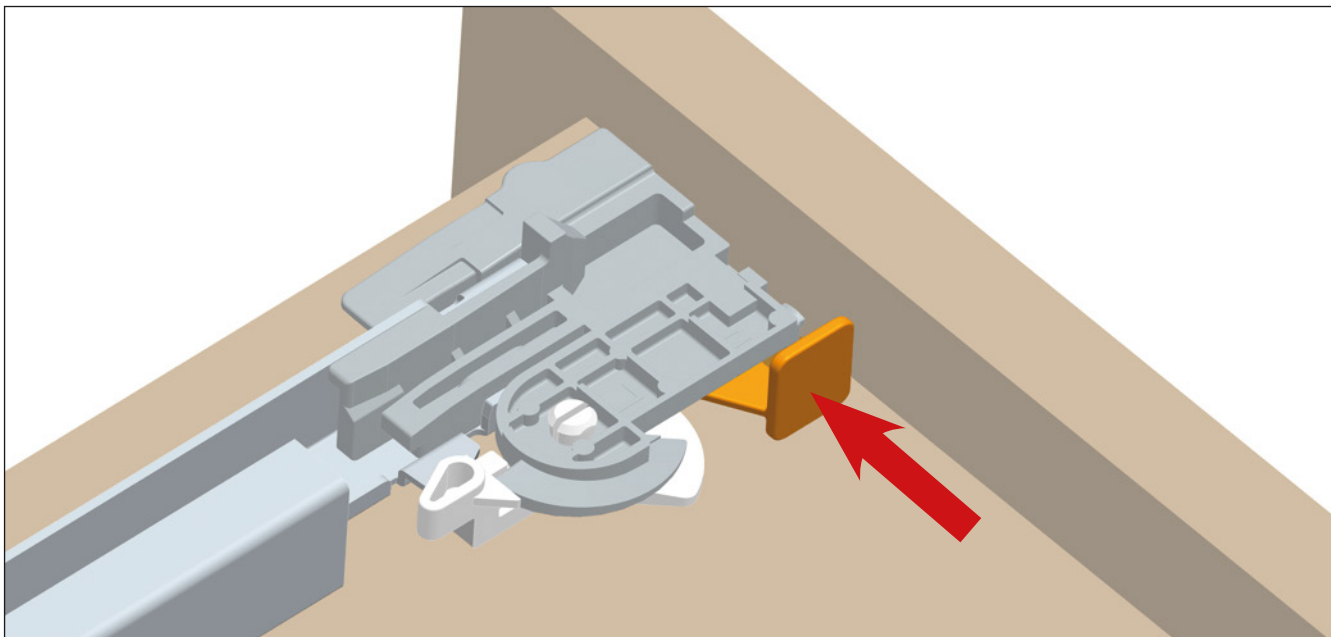


Pin-fix version - Adjustments

Height adjustment + 3 mm




Available on all runner versions.
This operation is tool free.

Initial position of the lever for the height adjustment.

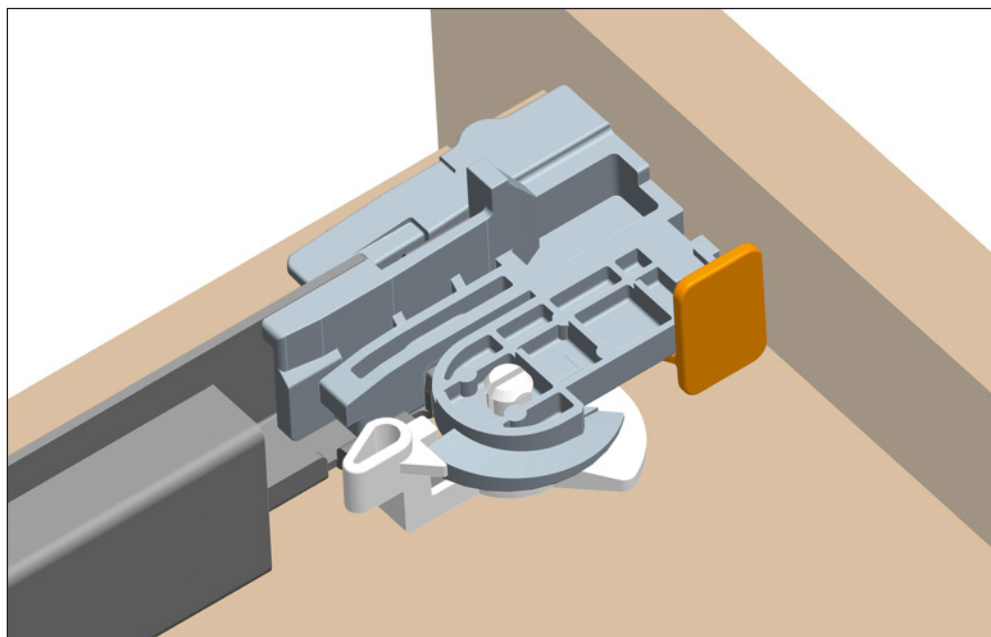

Turn the lever towards the front of the drawer to achieve the height adjustment.

This operation is tool free.

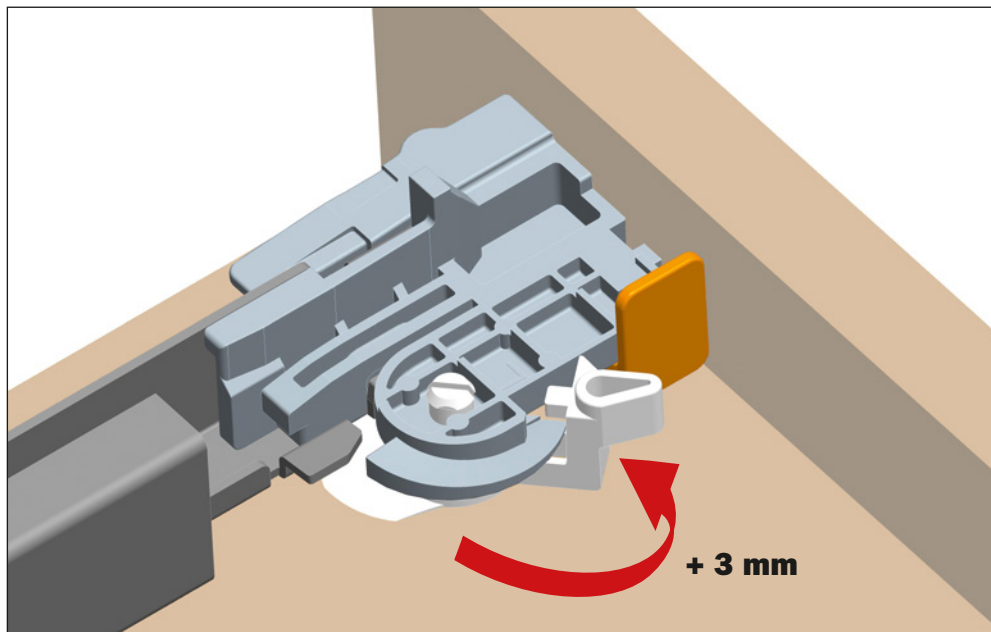




Futura - Pin fix version - Adjustments**Depth adjustment + 2 mm - 2 mm**

Available on all Push runners.




Rotate the black wheel towards the front of the drawer to move the drawer forward.

This operation is tool free.

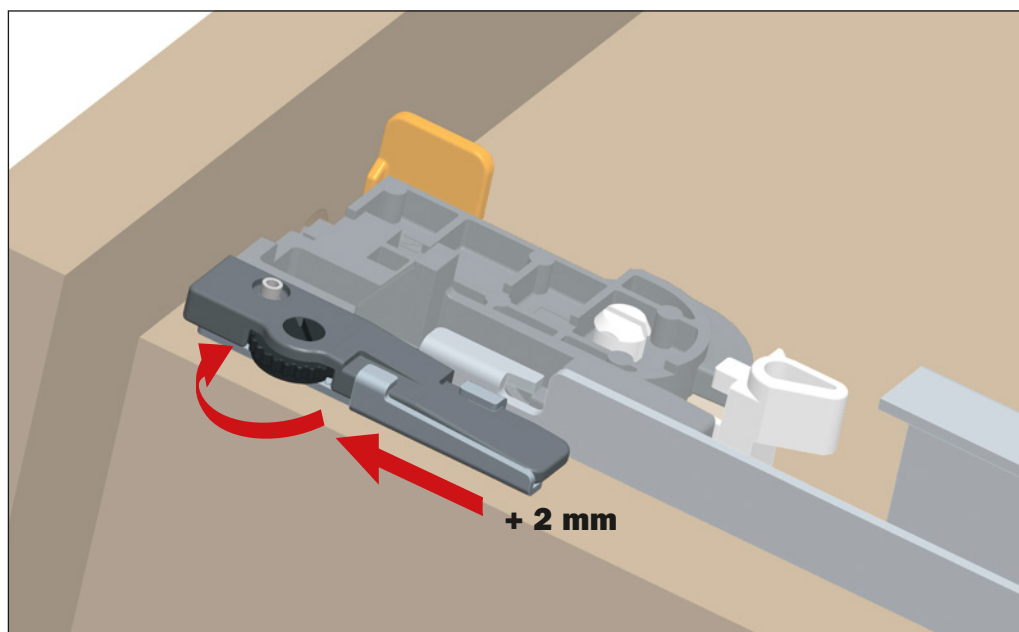

Rotate the black wheel towards the back of the drawer to move the drawer backward.

This operation is tool free.

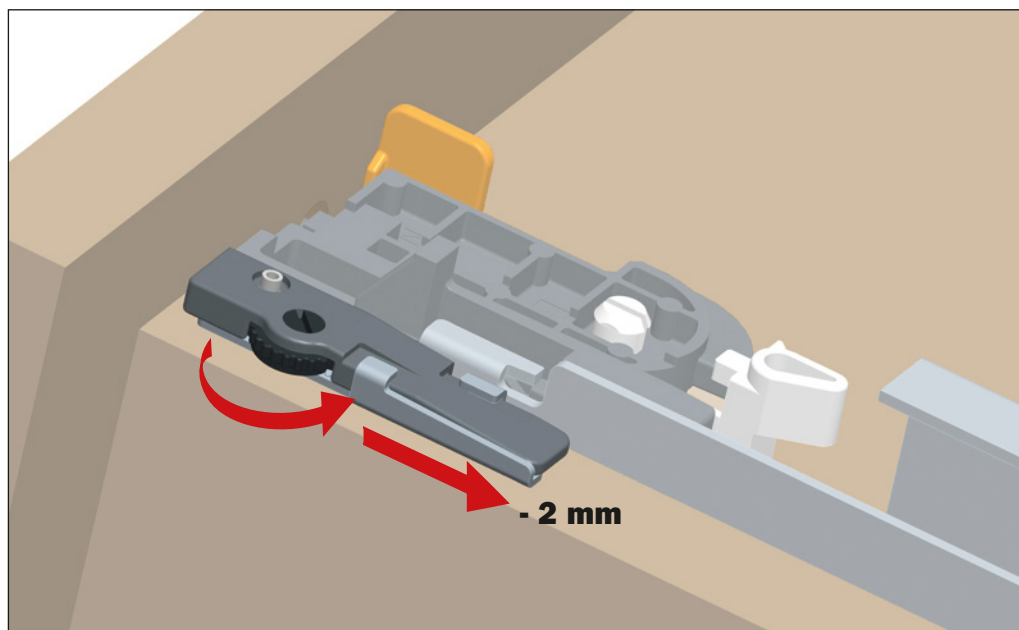

Clip version - Drawer setting


Abbreviations

SP = Thickness of the drawer

LN = Nominal runner length

PM = Depth of the cabinet


X = Internal width of the cabinet

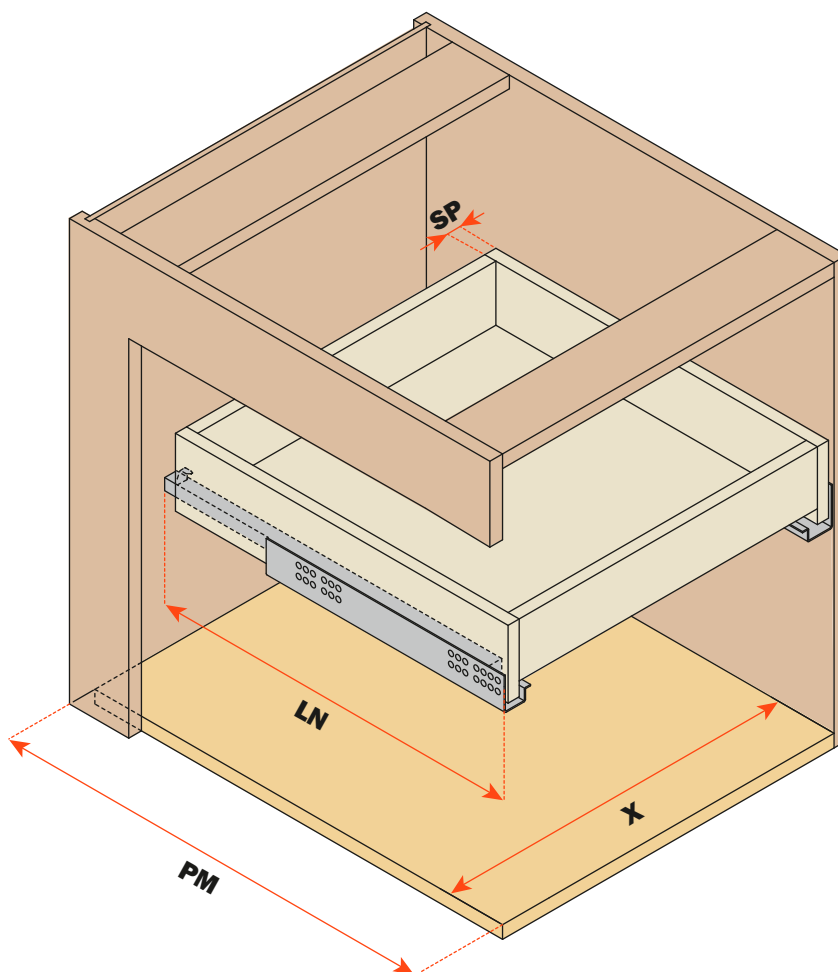

Drawer dimensions

LC = Runner length - 10 mm

X - 42 = Internal width of the drawer

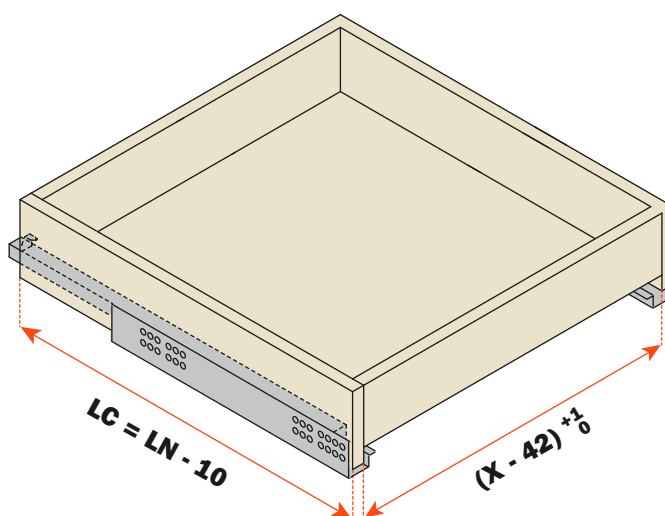


The drawer length is 10 mm shorter than the runner length


The internal width of the drawer is 42 mm less than the internal width of the cabinet

Futura - Clip - Drawer drilling


Drawer with frontal - three-sided (view from below)
Template for drawer drilling - see page 60

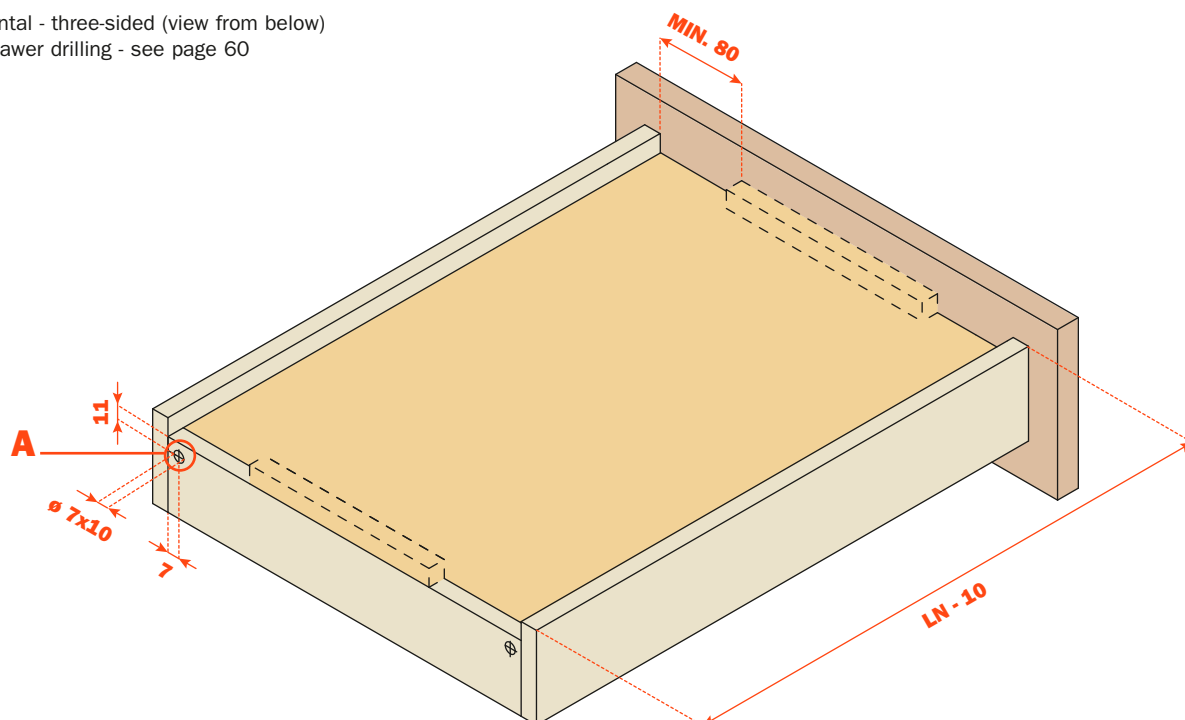


Internal drawer - four-sided (view from below)
Template for drawer drilling - see page 60

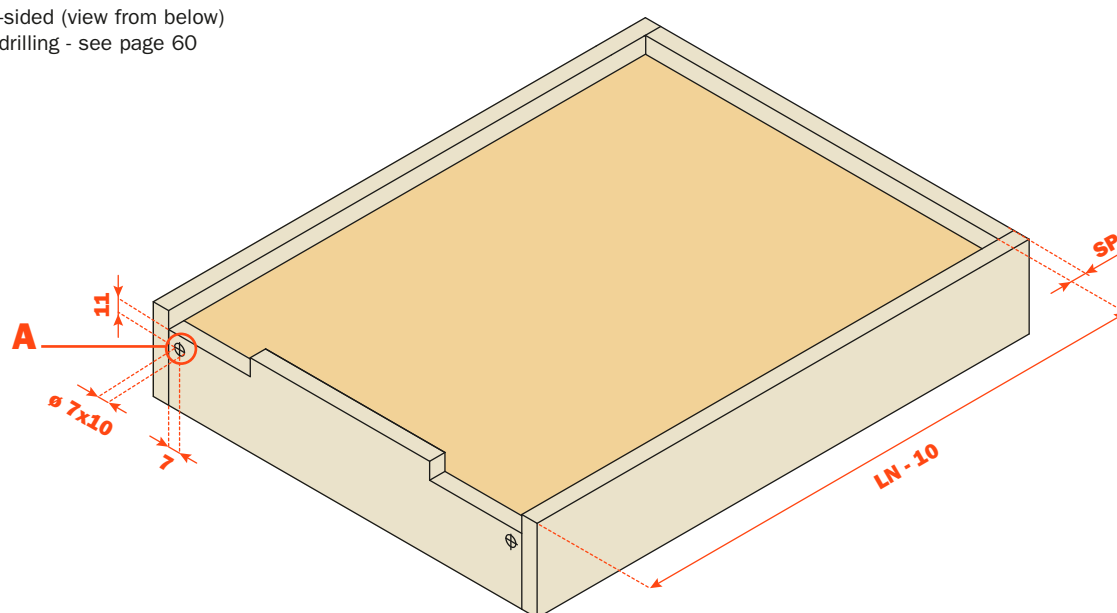


REAR HOOK

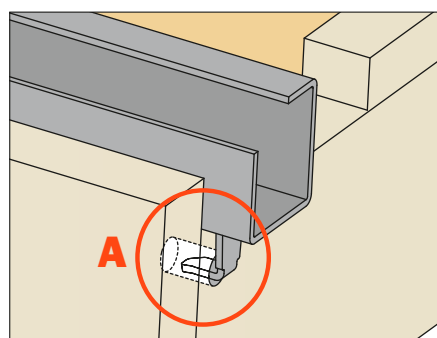

REAR NOTCH

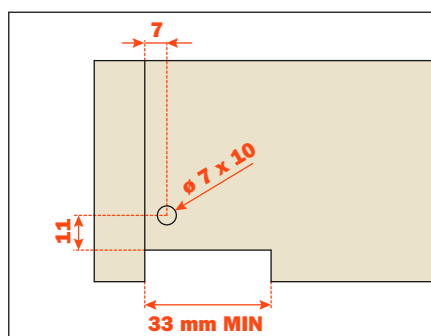


REAR NOTCH with Futura Push synchroniser

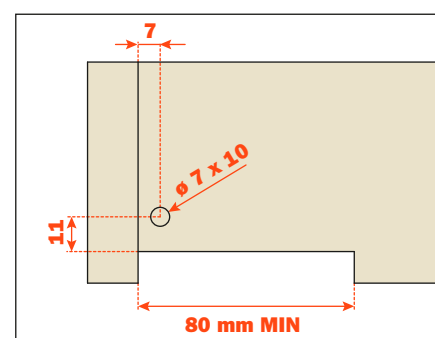

Use **drilling template** for rear hook, see page 60.

With 1 way adjustable clip - Technical information

Fixing clip


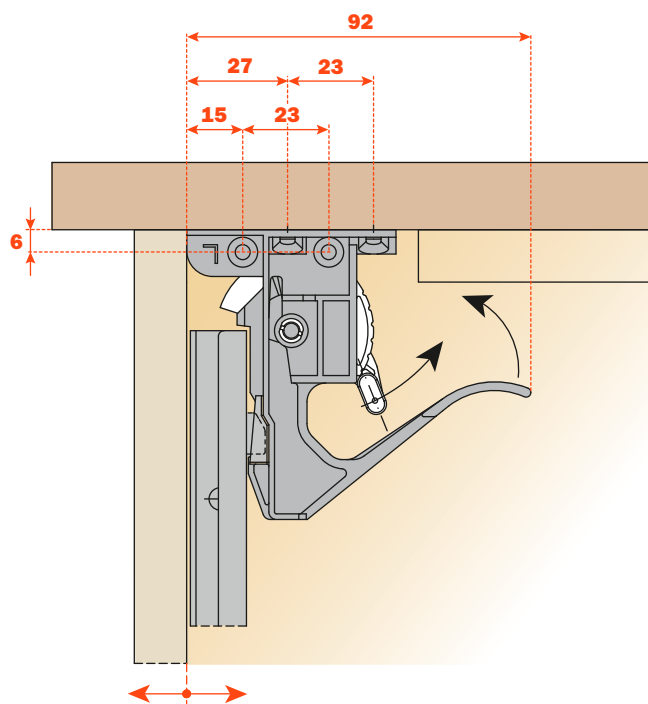


1071000010100

Right and left clip

PACKING



2 BOXES = 100 right pcs. and 100 left pcs.

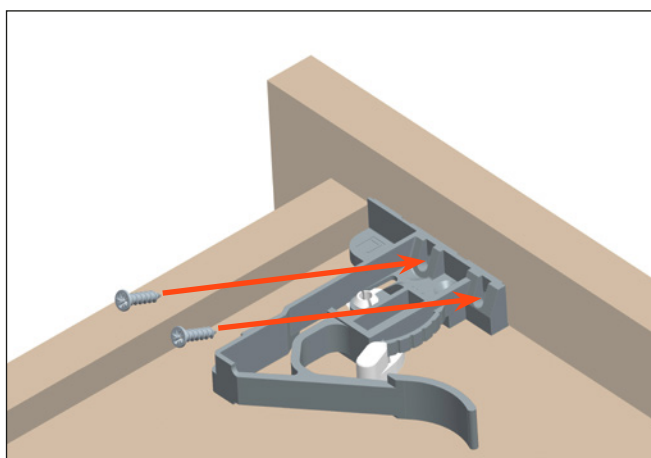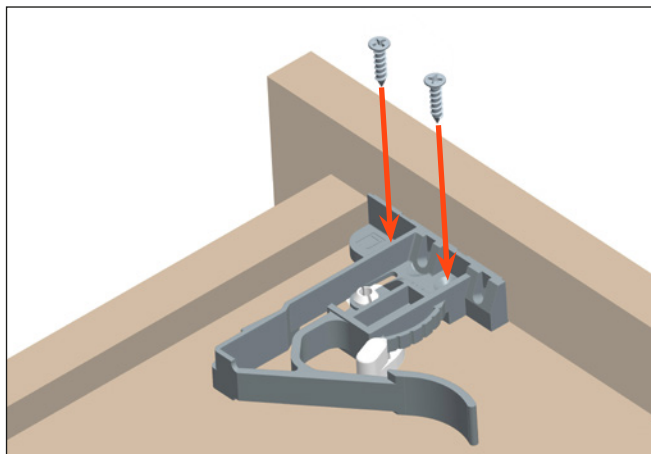

Height adjustment + 2.5 mm

Turn the lever towards the front of the drawer to adjust the height.

This operation is tool free.

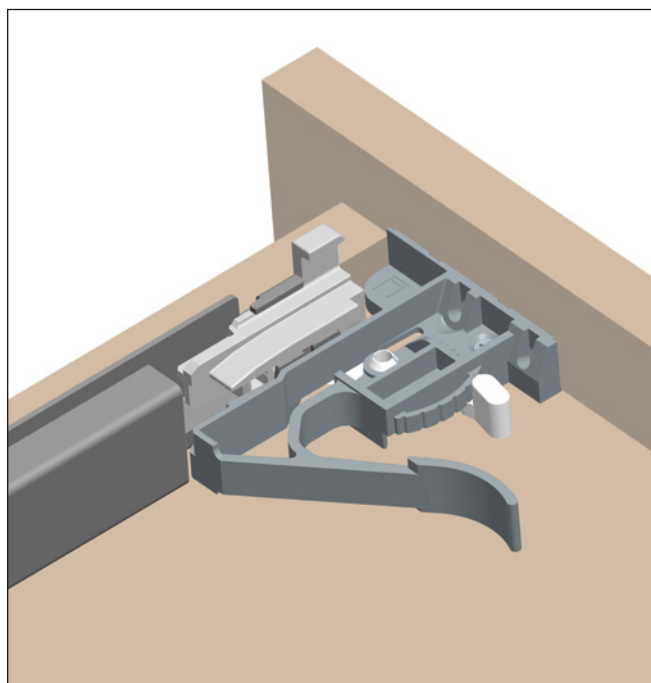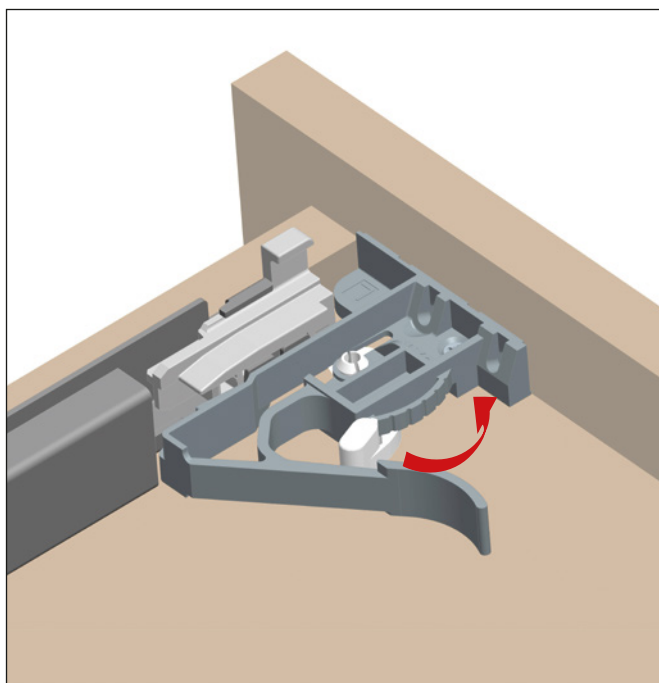

Futura - with 3 way adjustable clip

The 3 way adjustment allows to:

- align the drawers between them;
- align the drawers with the cabinet.



Features and benefits of the clip:

- for all versions of full-extension runners
- tool free 3 way adjustment
- patented removal system of the drawer, from both the front and the sides of the drawer
- clip manufactured in Carbon Fibre rich material for light weight, strength and rigidity

Clip assembly

Position the left and the right clip at the front of the drawer.

Fix with the screws on the bottom or on the front of the drawer as indicated in the images below.

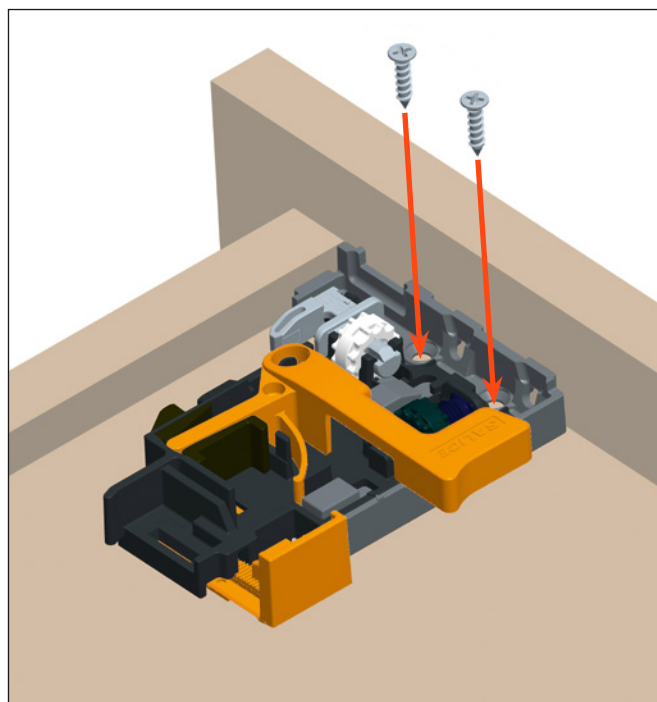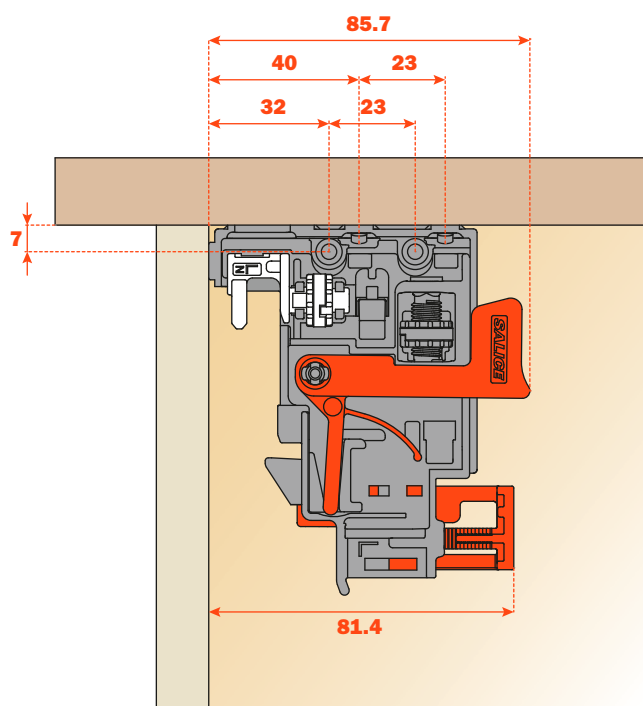


1075000010100

Right and left clip with integrated adjustments

PACKING

2 BOXES = 100 right pcs. and 100 left pcs.

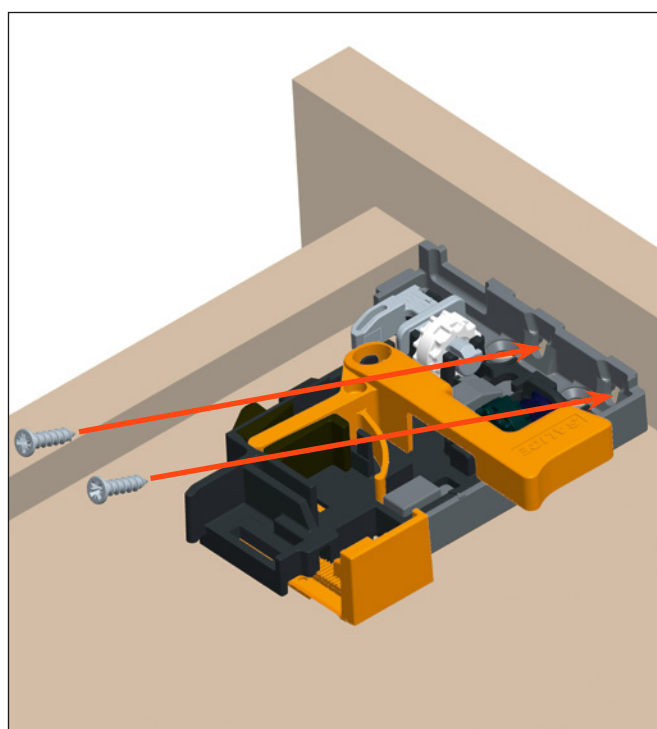


Removal of the drawer

The drawer can be removed operating from both the front and the sides.


Removal from the front:

position the hands under the front of the drawer and pull both the orange levers in the direction indicated , sliding the drawer outwards.

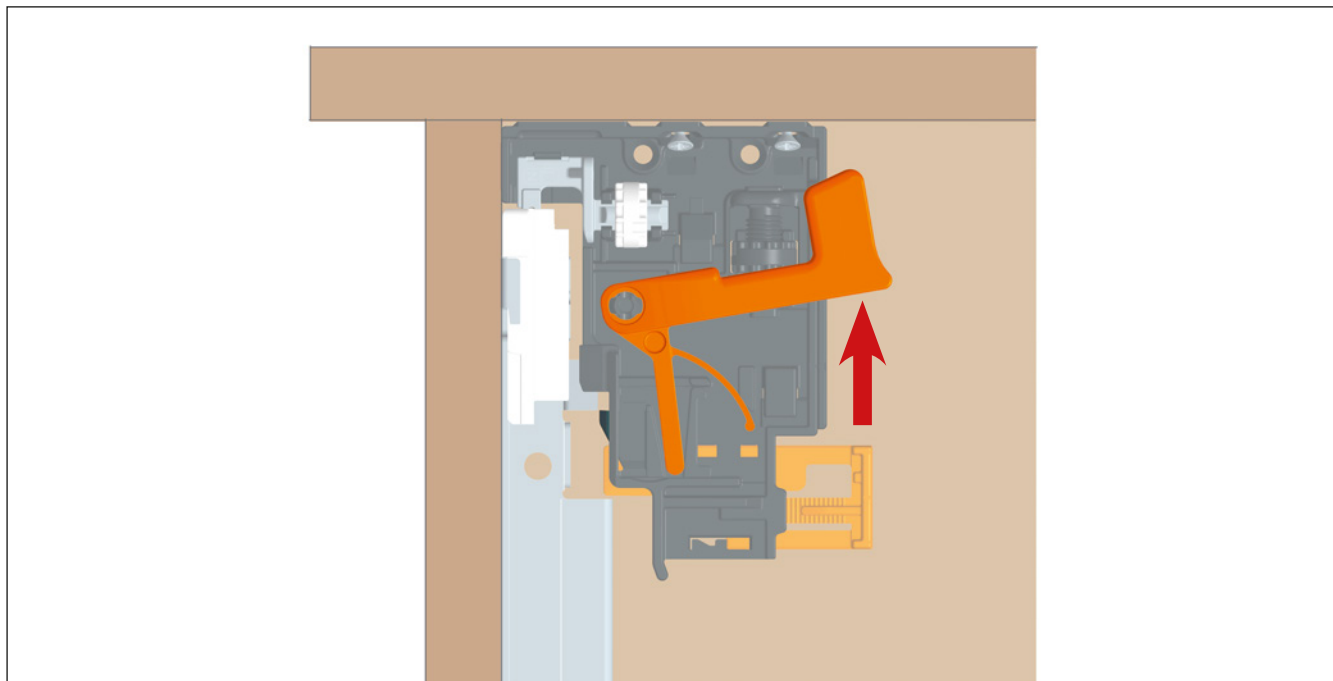

Removal from the side:



position the hands under both sides of the drawer and operate on the orange levers, as indicated in the drawing, sliding the drawer forward.

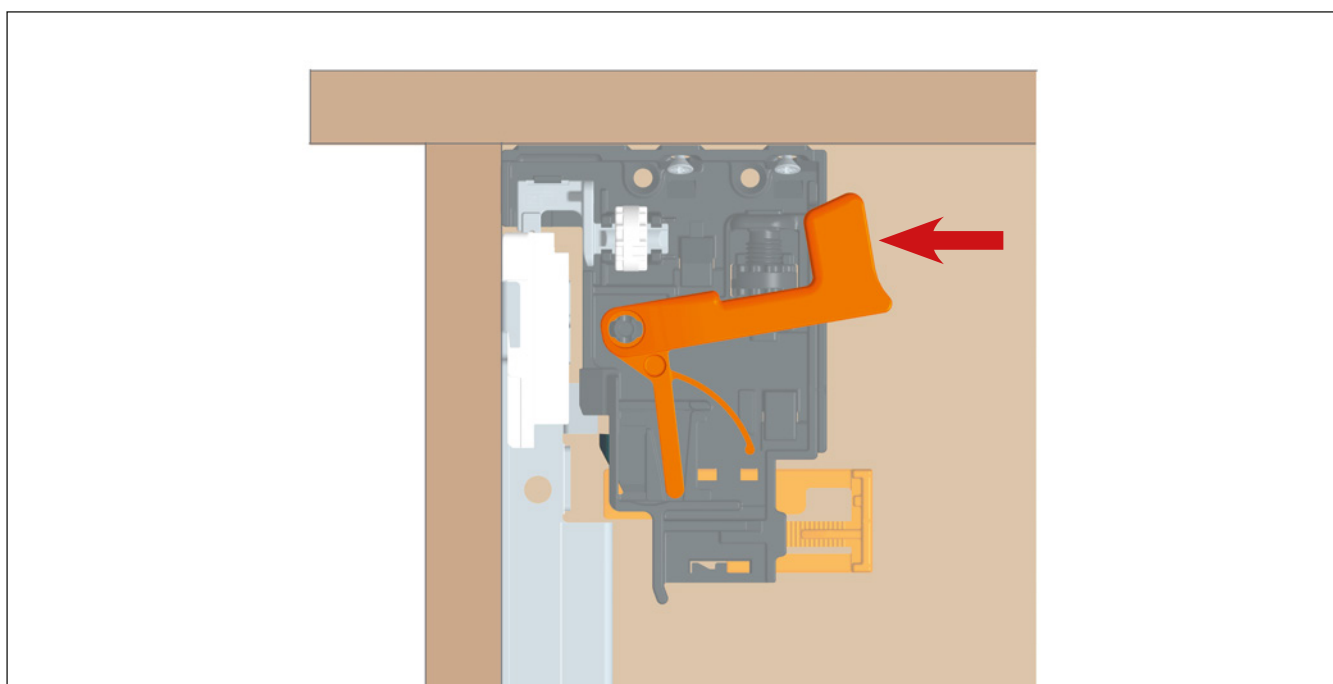

Futura - with 3 way adjustable clip




Height adjustment + 2.5 mm

Initial position of the lever for the height adjustment.

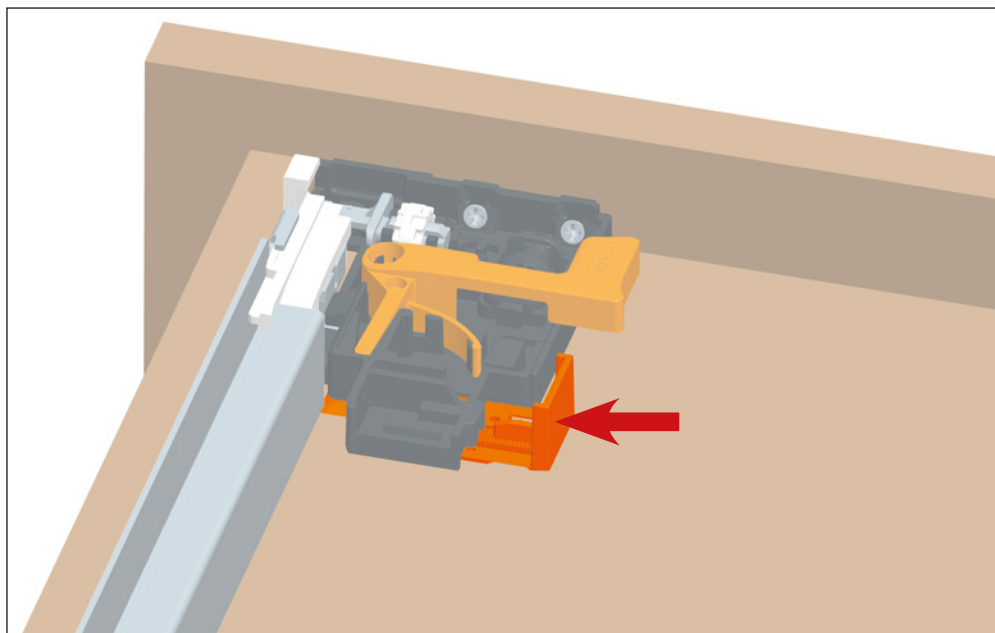

Push the lever towards the outside of the drawer to achieve the height adjustment.




This operation is tool free.

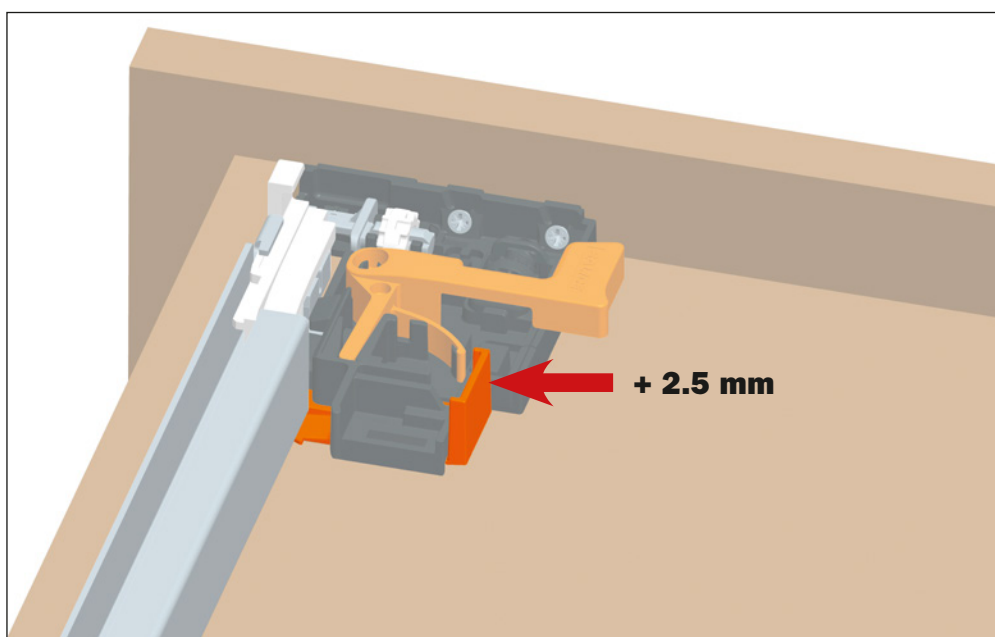

Sideways adjustment + 1.5 mm - 1.5 mm




Rotate the white wheel towards the front of the drawer to adjust left.
The clip shows the position 0.

This operation is tool free.

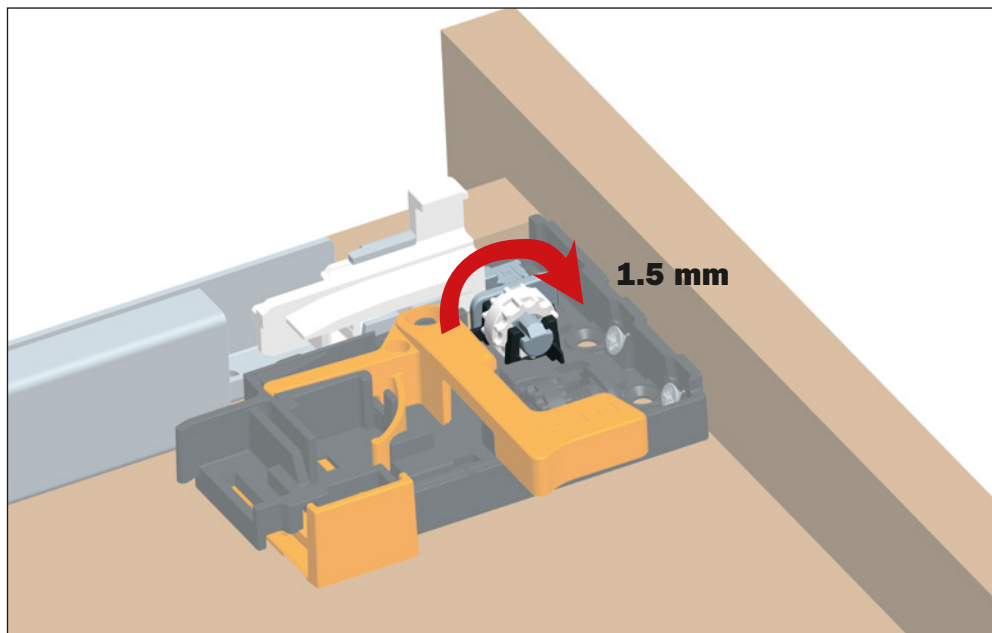

Rotate the white wheel towards the back of the drawer to adjust right.
The clip shows the position 0.

This operation is tool free.

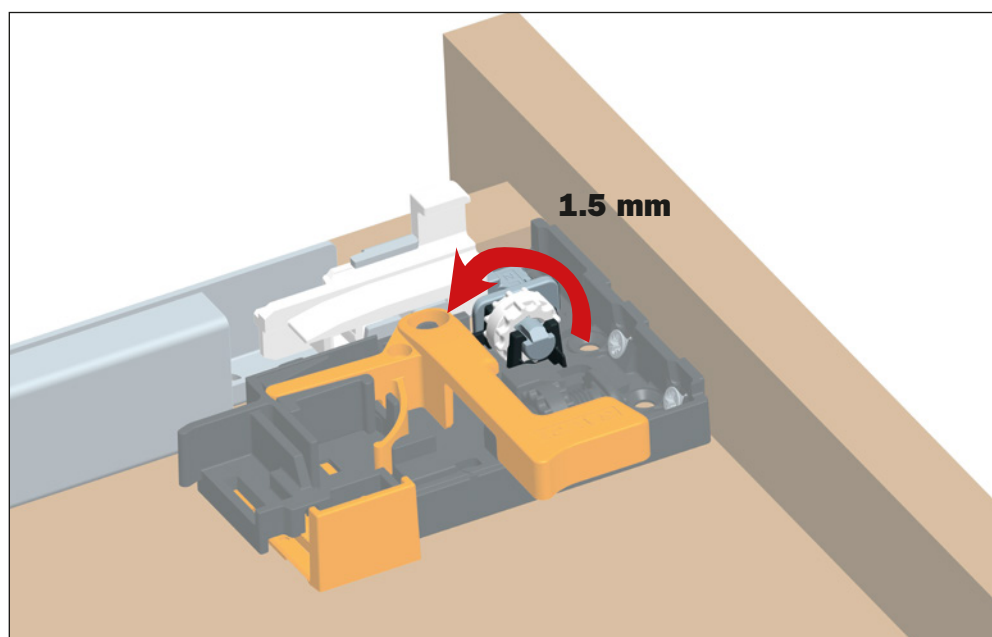




For sideways adjustment, it is recommended that the adjusters on the clips are operated in the same direction, in order to maintain the correct alignment and movement of the runners.

Futura - with 3 way adjustable clip

Depth adjustment + 2 mm - 2 mm




Rotate the black wheel towards the inside of the drawer to move the drawer backward.
The clip shows the position 0.

This operation is tool free.

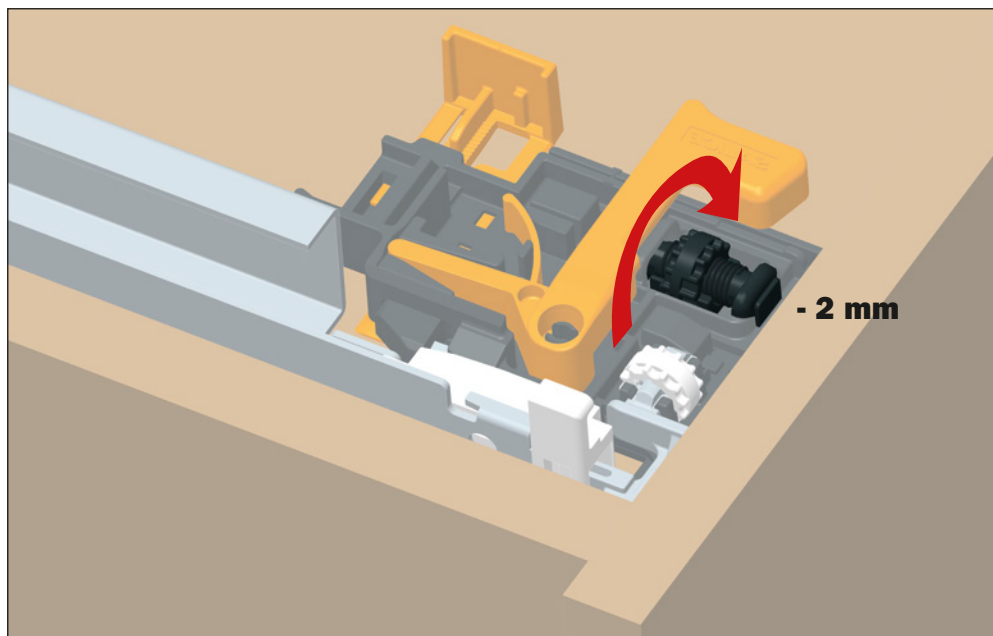

Rotate the black wheel towards the outside of the drawer to move the drawer forward.
The clip shows the position 0.

This operation is tool free.

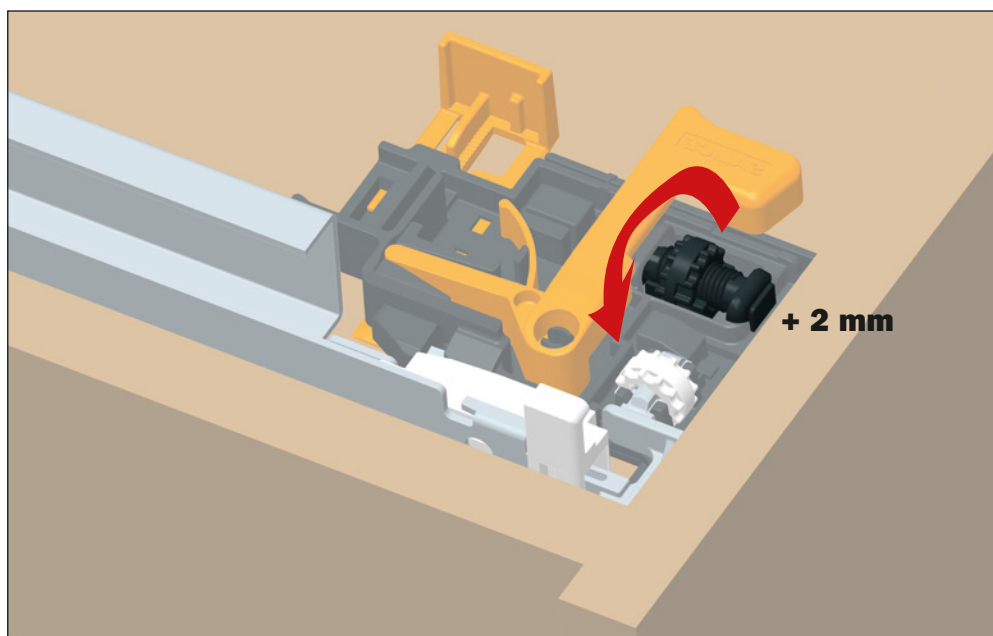


Technical information

Part-extension

Runner length (nominal size)


- from 250 to 470 mm → x = 89 mm

- from 500 to 600 mm → x = 119 mm

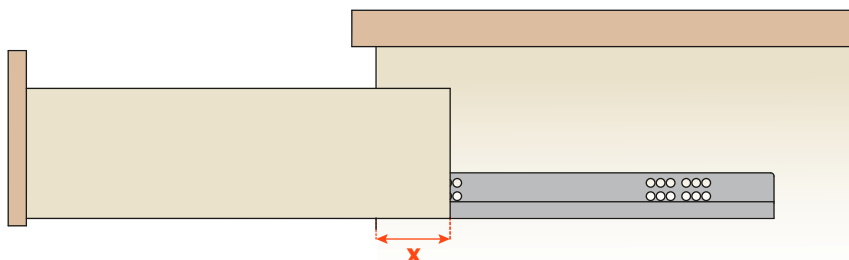

Full-extension

Drawer length = extension

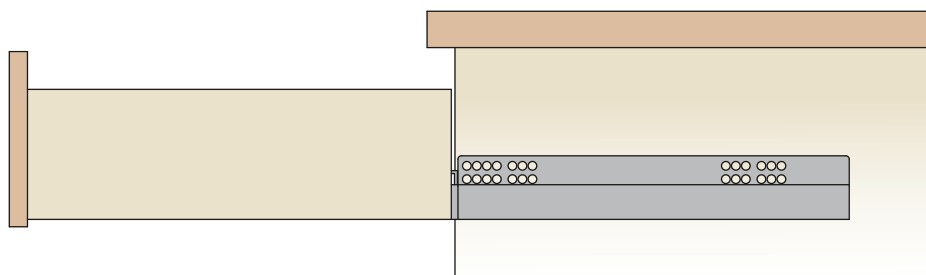

Part number composition - Runners

Example:

10 XXX XX XXX 2 0 0

BASIC PART NUMBER

ARTICLE (ex. 612)

ARTICLE VERSIONS:
00 = With self-closing
77 = With Push
50 = With Smove

PACKING:
0 = Industrial

FIXING ON CABINET SIDE:
0 = To be screw fixed

RUNNER LENGTH (in mm)

Packing

Clip version

SINGLE PACKING

2 BOXES = 20 right pcs. and 20 left pcs.

INDUSTRIAL PACKING

PALLET = see the table

PART-EXTENSION		
ARTICLE	LENGTH	PALLET
61500 SELF	from 250 to 600	500 prs
61577 PUSH	from 250 to 400	400 prs
61577 PUSH	from 450 to 600	320 prs
61550 SMOVE	from 250 to 400	400 prs
61550 SMOVE	from 450 to 600	320 prs

FULL EXTENSION		
ARTICLE	LENGTH	PALLET
65500 SELF	from 250 to 400	300 prs
65500 SELF	from 450 to 600	280 prs
65577 PUSH	from 250 to 350	300 prs
65577 PUSH	from 400 to 600	280 prs
65550 SMOVE	from 250 to 400	300 prs
65550 SMOVE	from 450 to 600	280 prs

PAIRS PACKING

See the table

FULL EXTENSION			
ARTICLE	LENGTH	BOX	PALLET
65577 PUSH	from 250 to 600	6 prs	240 prs
65550 SMOVE	from 250 to 600	6 prs	240 prs

Pin version

SINGLE PACKING


2 BOXES = 20 right pcs. and 20 left pcs.

INDUSTRIAL PACKING

PALLET = see the table

PART-EXTENSION		
ARTICLE	LENGTH	PALLET
61200 SELF	from 250 to 400	400 prs
61200 SELF	from 450 to 600	320 prs
61277 PUSH	from 250 to 400	400 prs
61277 PUSH	from 450 to 600	320 prs
61250 SMOVE	from 250 to 400	400 prs
61250 SMOVE	from 450 to 600	320 prs

FULL EXTENSION		
ARTICLE	LENGTH	PALLET
65200 SELF	from 250 to 350	300 prs
65200 SELF	from 400 to 600	280 prs
65277 PUSH	from 250 to 350	300 prs
65277 PUSH	from 400 to 600	280 prs
65250 SMOVE	from 250 to 350	300 prs
65250 SMOVE	from 400 to 600	280 prs

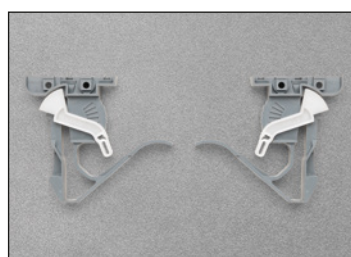


1071000010100

Futura with 1 way adjustable clip

Right and left clip

PACKING
2 BOXES = 100 right pcs.
and 100 left pcs.

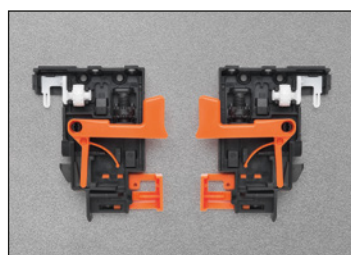


1075000010100

Futura with 3 way adjustable clip

Right and left clip with integrated adjustments

PACKING
2 BOXES = 100 right pcs.
and 100 left pcs.

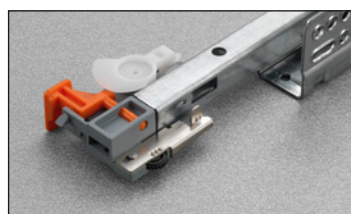

Futura pin fix version



Futura Self-closing


Futura Self-closing 61200 - Concealed runner




Part-extension runner fixed to the drawer by pin-fix clip.

Product features


- Dynamic load capacity 294 N (30 Kg).
- Self-closing device on drawer.
- Safety system that prevents the drawers from turning over.
- Drawer height adjustment +3 mm.
- The drawer is maintained parallel with the cabinet side during opening.
- Drawer fixing without screws.
- Compatible with ART. 65200.
- Finish: bright zinc-plated.



Dimensions

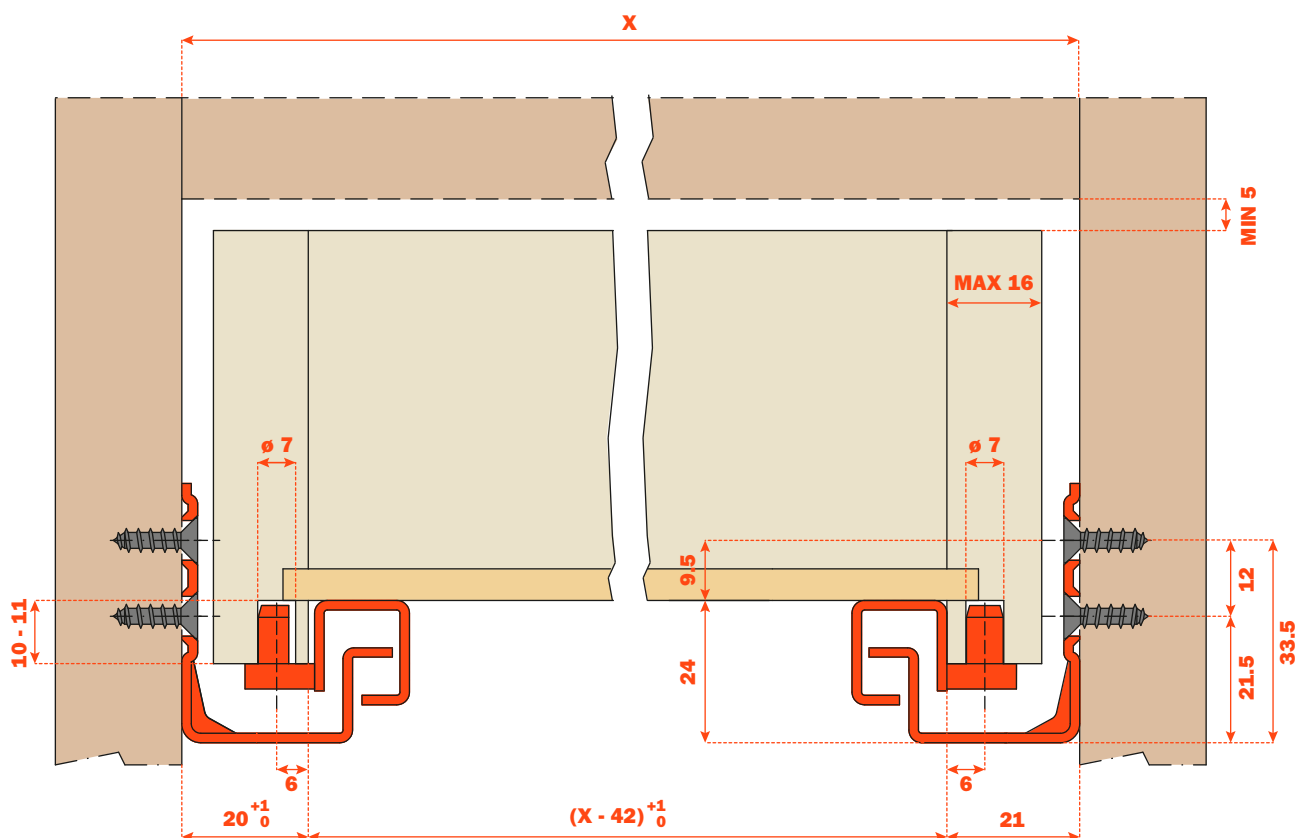

Part number




To be screw fixed
Screw TSP ø 3.5 mm

BASIC PART NUMBER	RUNNER LENGTH (LN)	=	MIN. DEPTH OF THE CABINET (PM)
1061200250200	250		250
1061200270200	270		270
1061200300200	300		300
1061200350200	350		350
1061200400200	400		400
1061200450200	450		450
1061200470200	470		470
1061200500200	500		500
1061200550200	550		550
1061200600200	600		600


Fixing the drawer onto the runners

The flexibility of the system enables the locating pin to be engaged simply by placing the drawer onto the runners and closing it.

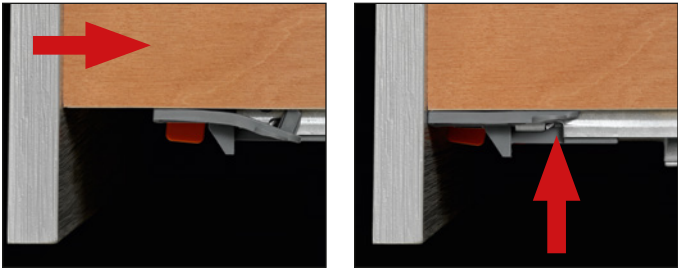

Detail of the pin-fix clip premounted on the runner, with:

- Tool free height adjustment;
- Safety device to prevent the drawers from turning over;
- Locating pin.

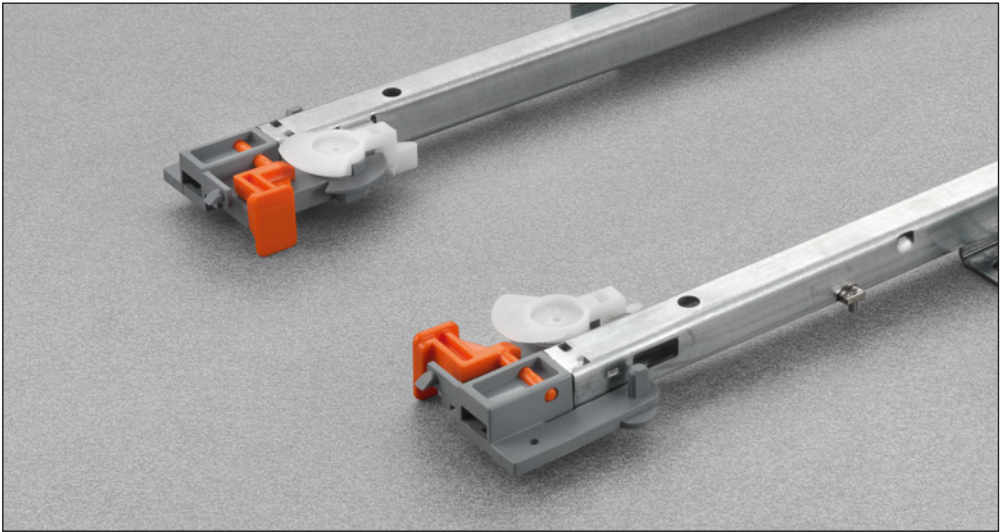


Futura Self-closing 61500 - Concealed runner




Part-extension runner fixed to the drawer by clip.

Product features


- Dynamic load capacity 294 N (30 Kg).
- Self-closing device on drawer.
- Safety system that prevents the drawers from turning over.
- Drawer height adjustment +2.5 mm.
- The drawer is maintained parallel with the cabinet side during opening.
- Compatible with ART. 65500.
- Finish: bright zinc-plated.



Dimensions

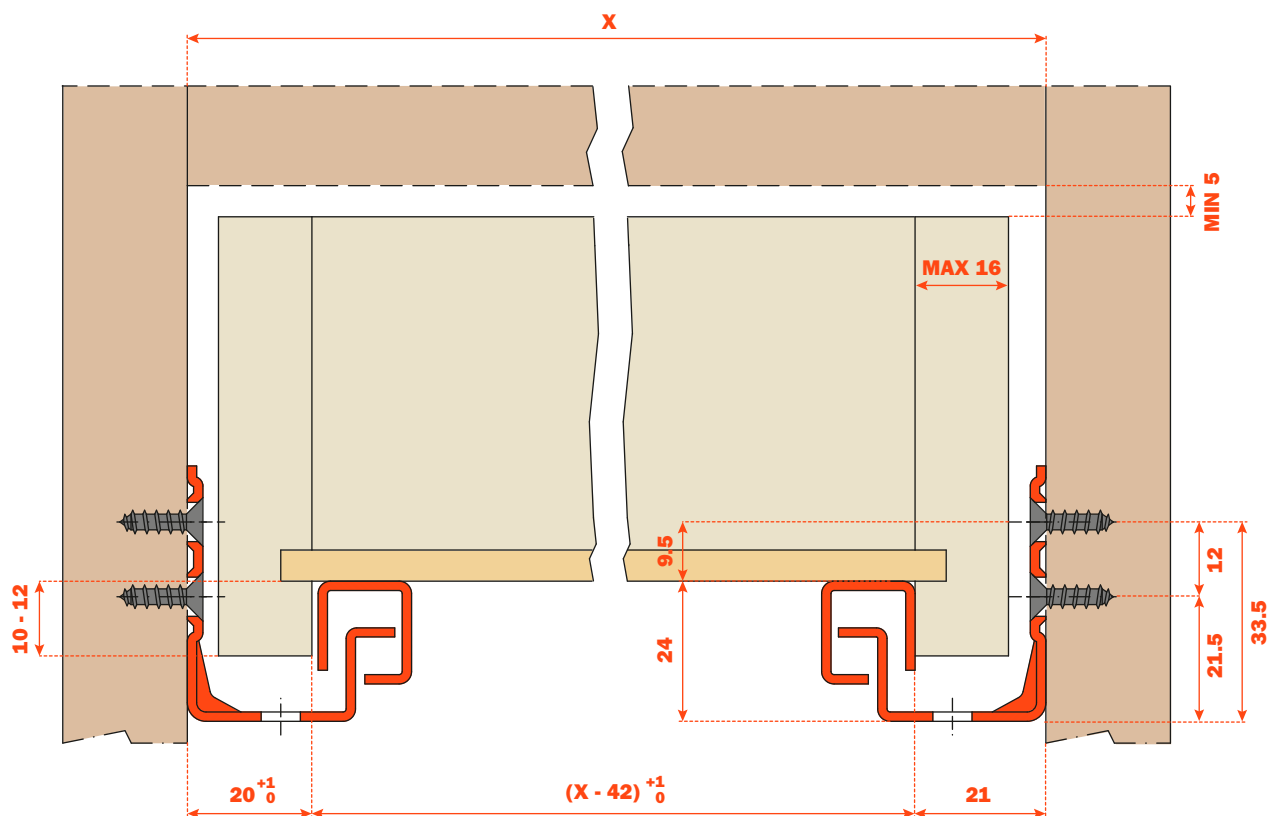

Part number




To be screw fixed
Screw TSP ø 3.5 mm

BASIC PART NUMBER	RUNNER LENGTH (LN)	=	MIN. DEPTH OF THE CABINET (PM)
1061500250200	250		250
1061500270200	270		270
1061500300200	300		300
1061500350200	350		350
1061500400200	400		400
1061500450200	450		450
1061500470200	470		470
1061500500200	500		500
1061500550200	550		550
1061500600200	600		600


Fixing the drawer onto the runners

Clip 1071000010100

Detail of the clip with tool free integrated height adjustment.

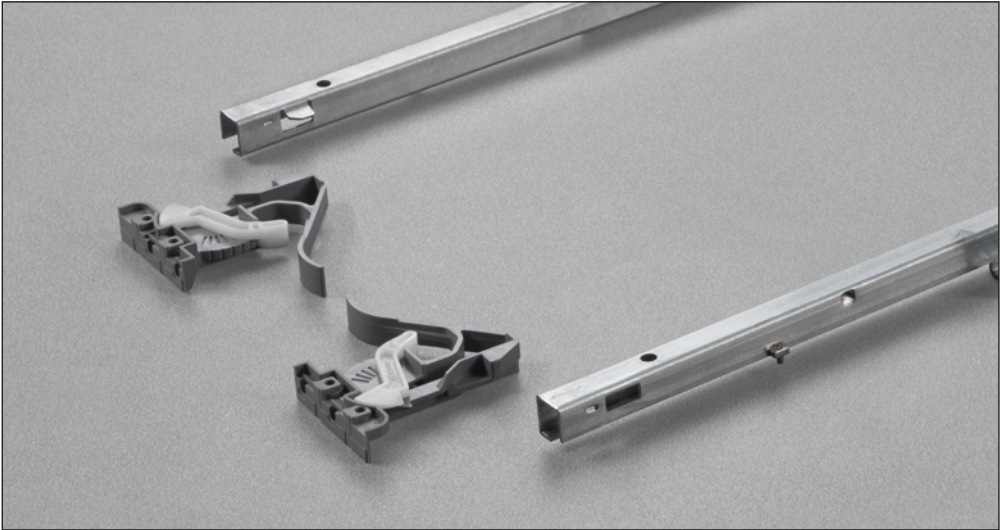


Futura Self-closing 65200 - Concealed runner

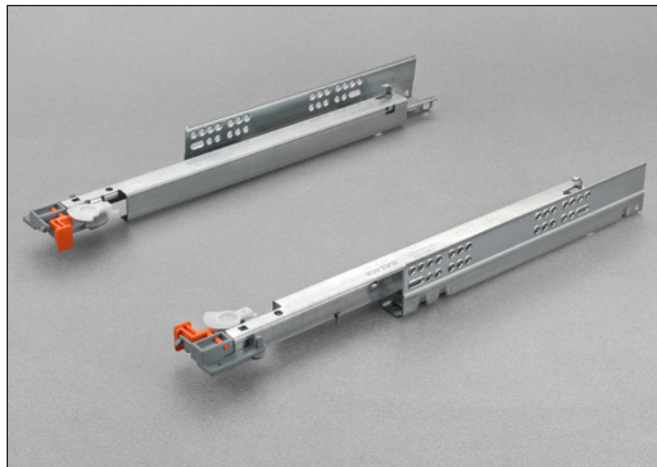


Full-extension runner fixed to the drawer by pin-fix clip.

Product features


- Dynamic load capacity 294 N (30 Kg).
- Self-closing device on drawer.
- Safety system that prevents the drawers from turning over.
- Drawer height adjustment +3 mm.
- The drawer is maintained parallel with the cabinet side during opening.
- Drawer fixing without screws.
- Compatible with ART. 61200.
- Finish: bright zinc-plated.

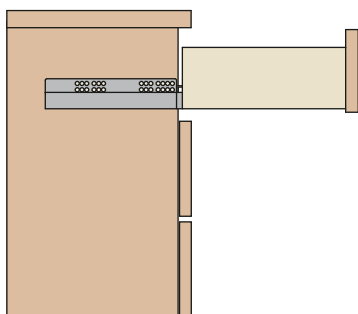

Dimensions

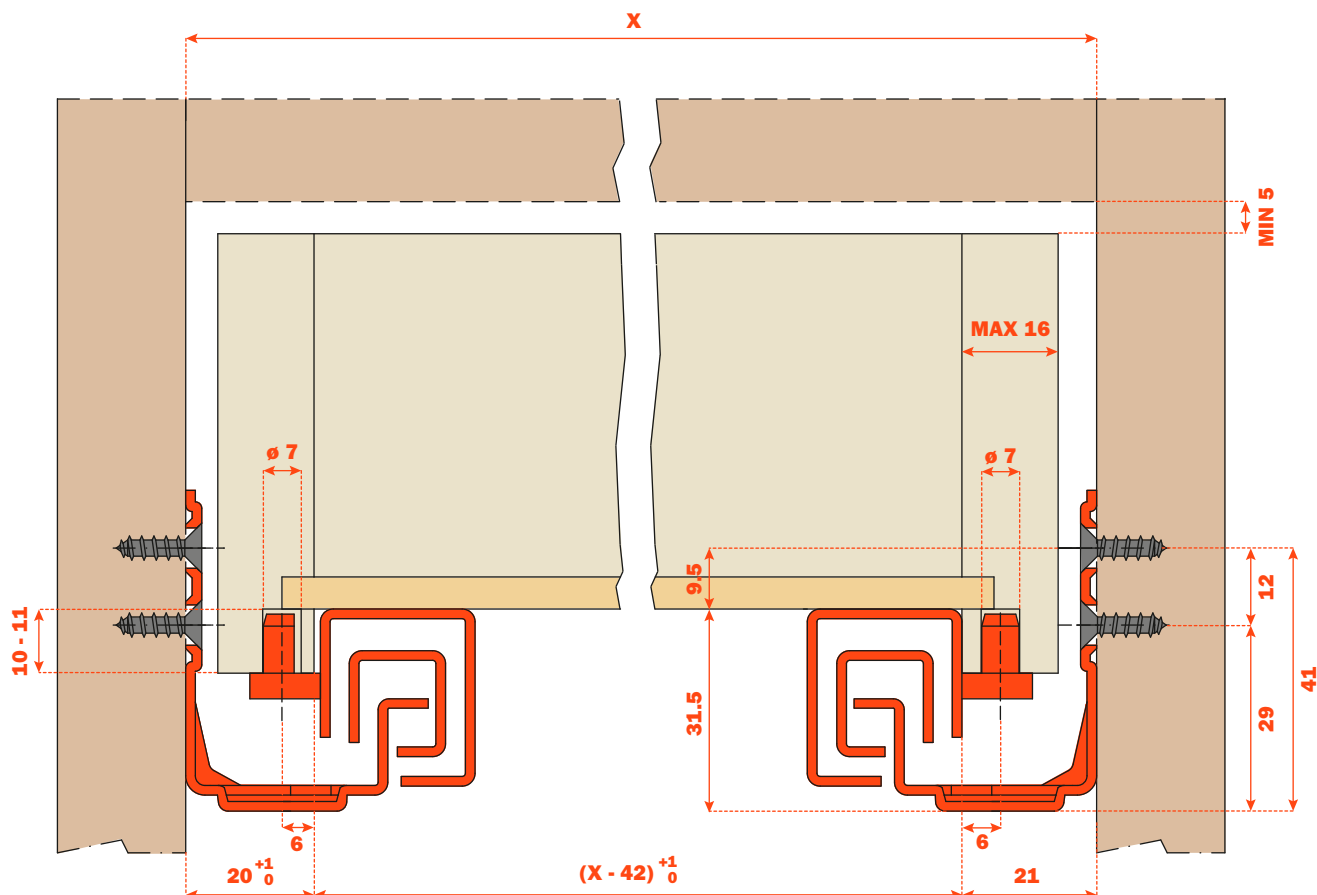

Part number




To be screw fixed
Screw TSP ø 3.5 mm

BASIC PART NUMBER	RUNNER LENGTH (LN)	MIN. DEPTH OF THE CABINET (PM)
1065200250200	250	260
1065200270200	270	280
1065200300200	300	310
1065200350200	350	360
1065200400200	400	410
1065200450200	450	460
1065200470200	470	480
1065200500200	500	510
1065200550200	550	555
1065200600200	600	605


Fixing the drawer onto the runners

The flexibility of the system enables the locating pin to be engaged simply by placing the drawer onto the runners and closing it.

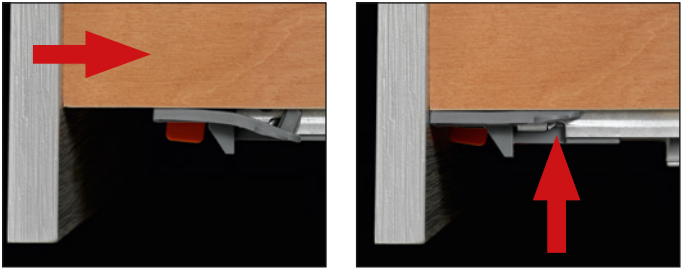

Detail of the pin-fix clip premounted on the runner, with:

- Tool free height adjustment;
- Safety device to prevent the drawers from turning over;
- Locating pin.

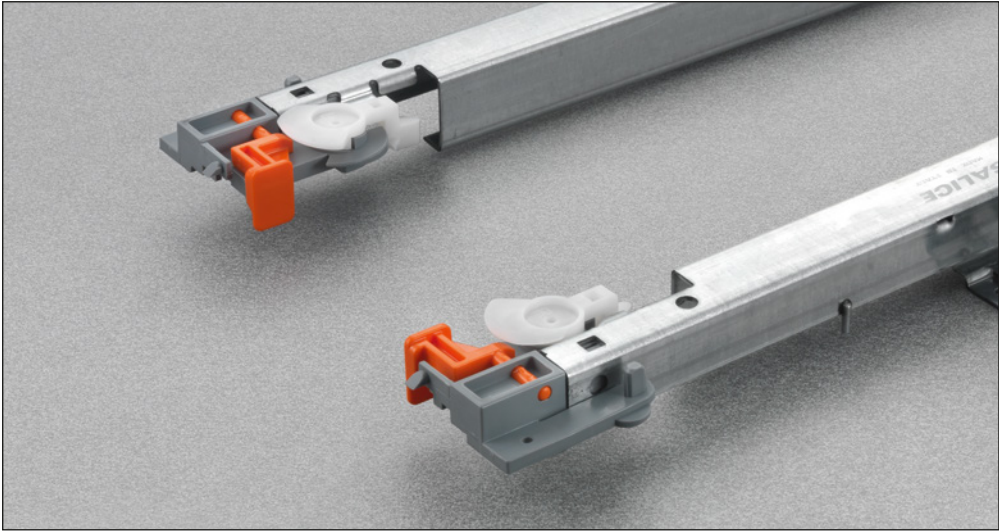


Futura Self-closing 65500 - Concealed runner




Full-extension runner fixed to the drawer by clip.

Product features


- Dynamic load capacity 294 N (30 Kg).
- Self-closing device on drawer.
- Safety system that prevents the drawers from turning over.
- Drawer height adjustment +2.5 mm with clip 10 710.
- Drawer height adjustment +2.5, side adjustment ± 1.5 mm, depth adjustment ± 2 mm with clip 10 750.
- The drawer is maintained parallel with the cabinet side during opening.
- Compatible with ART. 61500.
- Finish: bright zinc-plated.

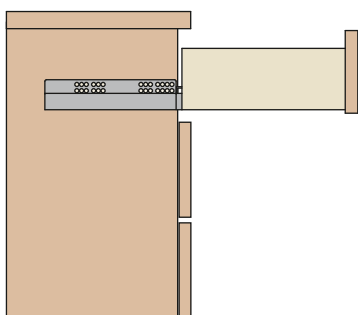

Dimensions

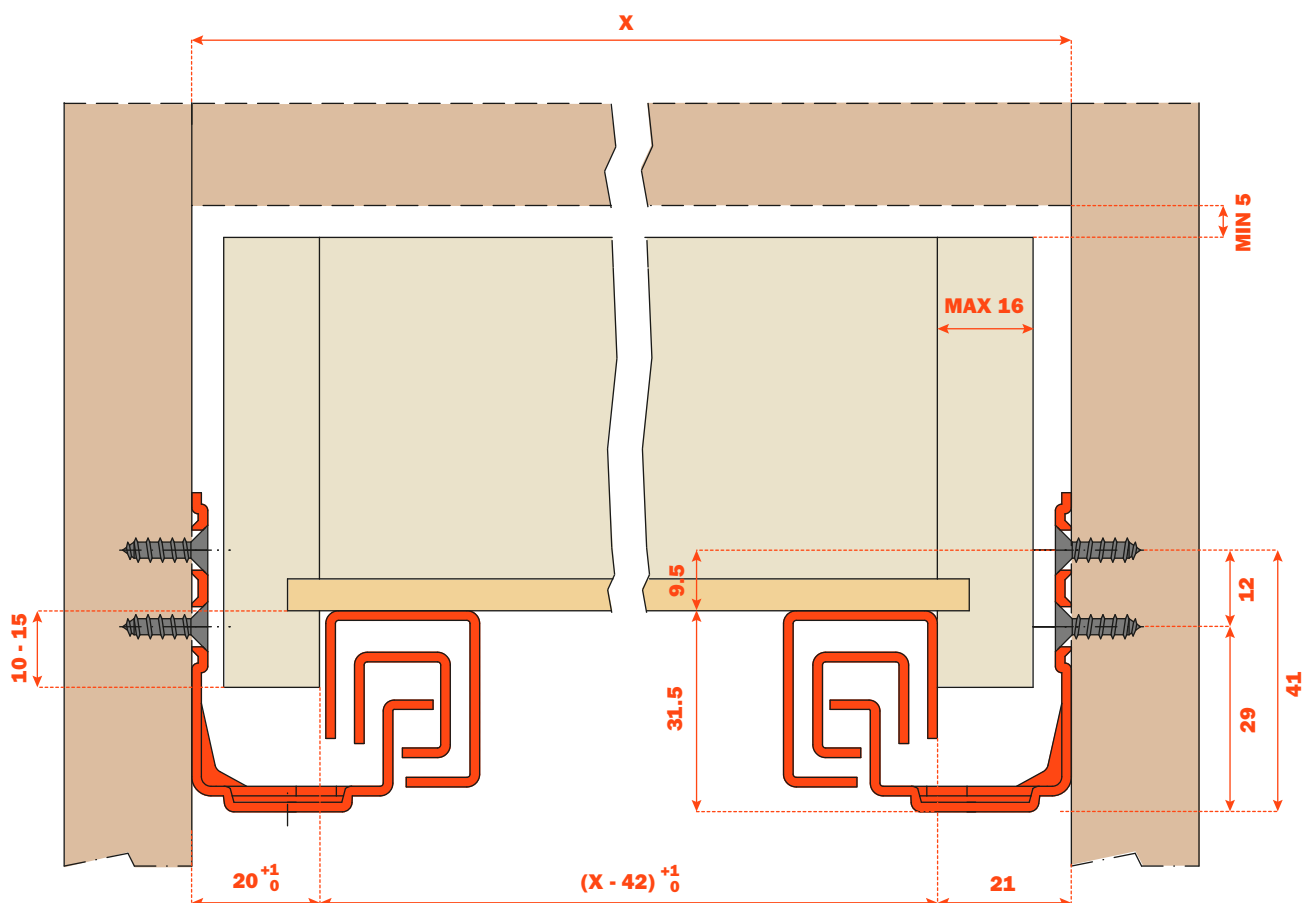

Part number




To be screw fixed
Screw TSP \varnothing 3.5 mm

BASIC PART NUMBER	RUNNER LENGTH (LN)	MIN. DEPTH OF THE CABINET (PM)
1065500250200	250	260
1065500270200	270	280
1065500300200	300	310
1065500350200	350	360
1065500400200	400	410
1065500450200	450	460
1065500470200	470	480
1065500500200	500	510
1065500550200	550	555
1065500600200	600	605

Fixing the drawer onto the runners


Clip 1071000010100

Detail of the clip with tool free integrated height adjustment.

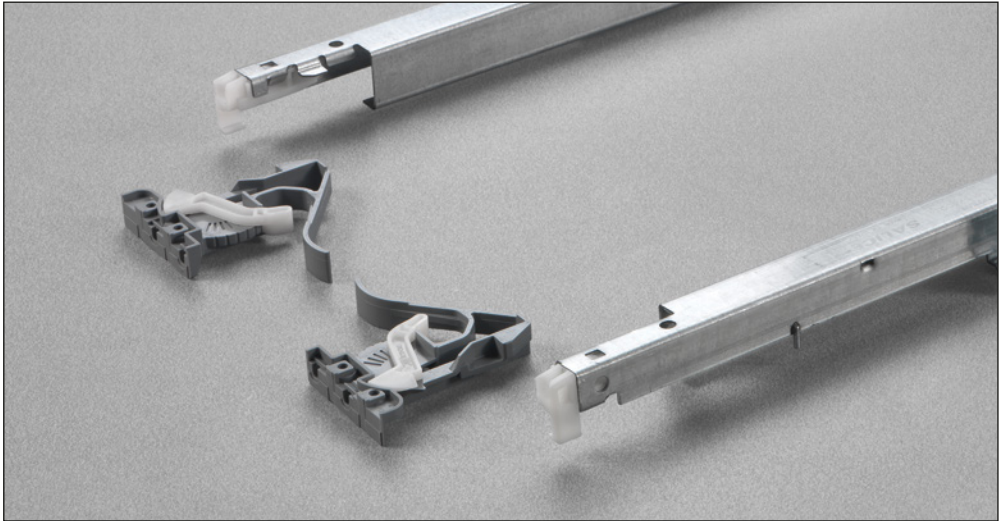

Clip 1075000010100


Detail of the tool free integrated 3-way adjustment clip (height, depth and side adjustment).

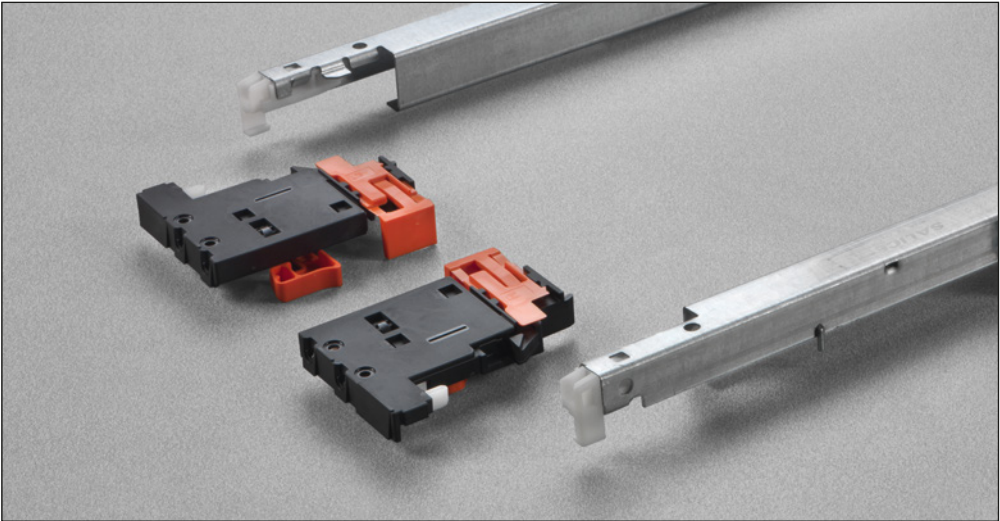



Futura Push

Futura Push 61277 - Concealed runner

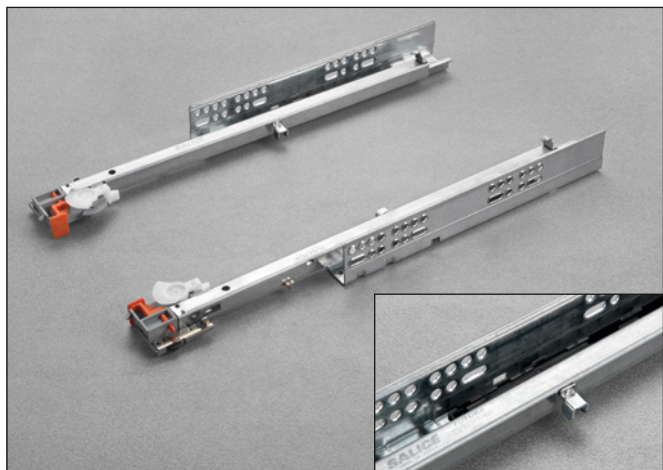


Part-extension runner fixed to the drawer by pin-fix clip.

Push: the new opening system for handle-less drawers, is fully integrated in the runner.


A slight pressure of the drawer frontal is sufficient for the drawer to self-open.

Product features


- Dynamic load capacity N 294 (Kg 30).
- Push opening system.
- Safety system that prevents the drawer from overturning.
- Drawer height adjustment +3 mm.
- Drawer depth adjustment ± 2 mm.
- The drawer is maintained parallel with the cabinet side during opening.
- Drawer fixing without screws.
- The drawer is held in the closed position.
- Synchronisation system for the opening of large drawers (optional) available for all runner lengths.
- Compatible with ART. 65277.
- Finish: bright zinc-plated.



Dimensions

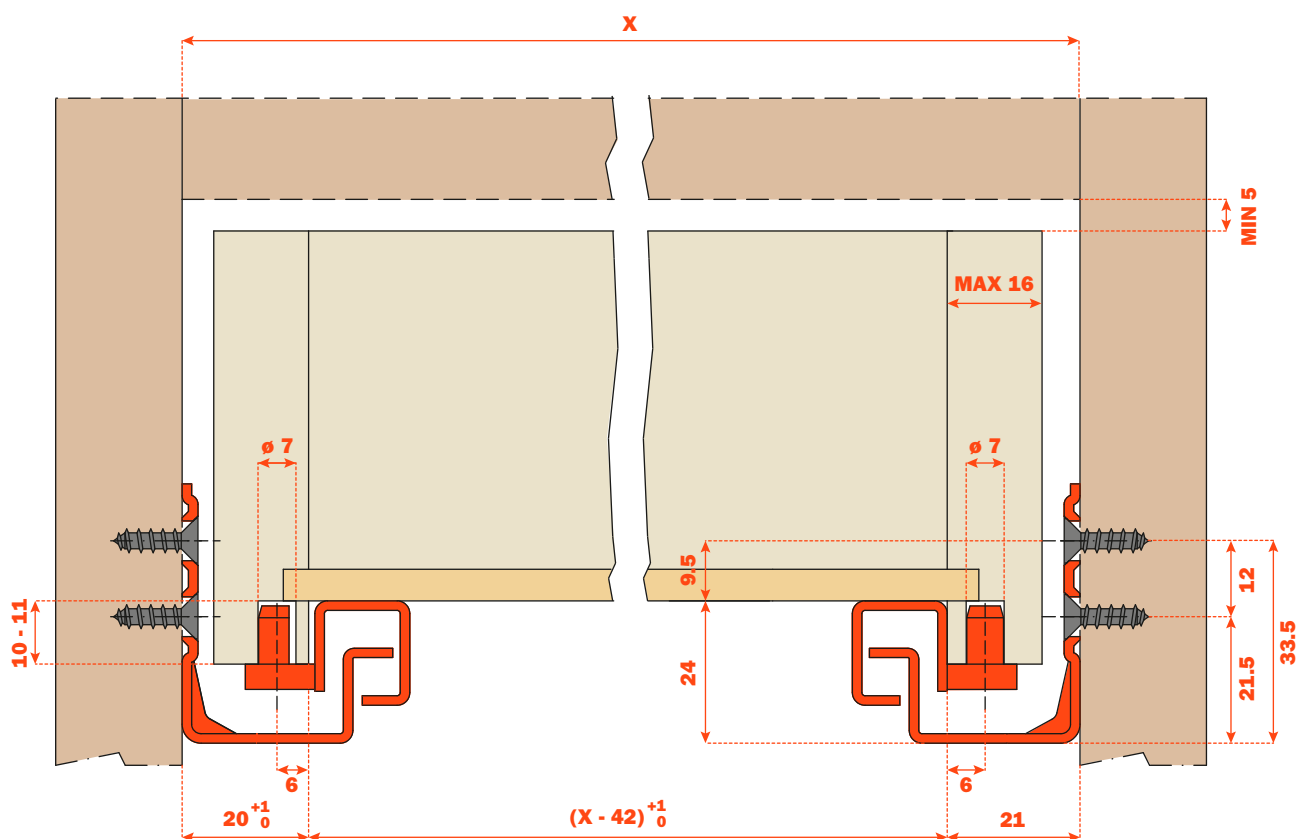

Part number



To be screw fixed
Screw TSP \varnothing 3.5 mm

BASIC PART NUMBER	RUNNER LENGTH (LN)	=	MIN. DEPTH OF THE CABINET (PM)
1061277250200	250		250
1061277270200	270		270
1061277300200	300		300
1061277350200	350		350
1061277400200	400		400
1061277450200	450		450
1061277470200	470		470
1061277500200	500		500
1061277550200	550		550
1061277600200	600		600


Fixing the drawer onto the runners

The flexibility of the system enables the locating pin to be engaged simply by placing the drawer onto the runners and closing it.




Detail of the pin-fix clip premounted on the runner, with:

- Tool free height and depth adjustment;
- Safety device to prevent the drawers from turning over;
- Locating pin.

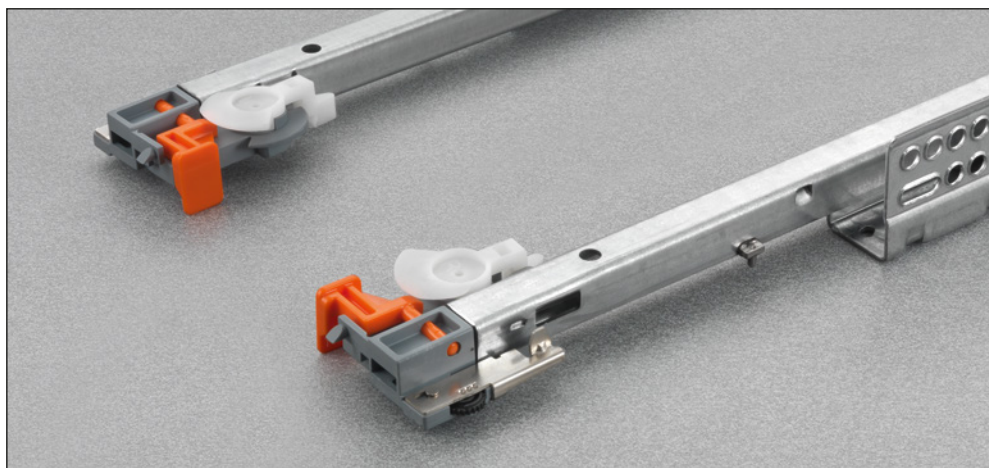

Detail of the Push system integrated into the runner which allows the opening of handle-less drawers.

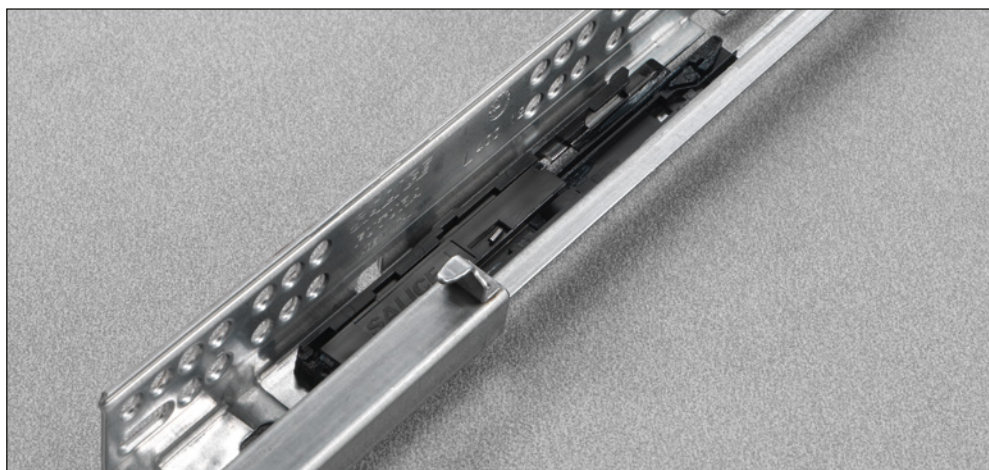

Futura Push 61577 - Concealed runner




Part-extension runner fixed to the drawer by clip.

Push: the new opening system for handle-less drawers, is fully integrated in the runner.


A slight pressure of the drawer frontal is sufficient for the drawer to self-open.

Product features


- Dynamic load capacity N 294 (Kg 30).
- With Push opening system.
- Safety system that prevents the drawer from overturning.
- Drawer height adjustment +2.5 mm.
- The drawer is maintained parallel with the cabinet side during opening.
- The drawer is held in the closed position.
- Synchronisation system for the opening of large drawers (optional) available for all runner lengths.
- Compatible with ART. 65577.
- Finish: bright zinc-plated.



Dimensions

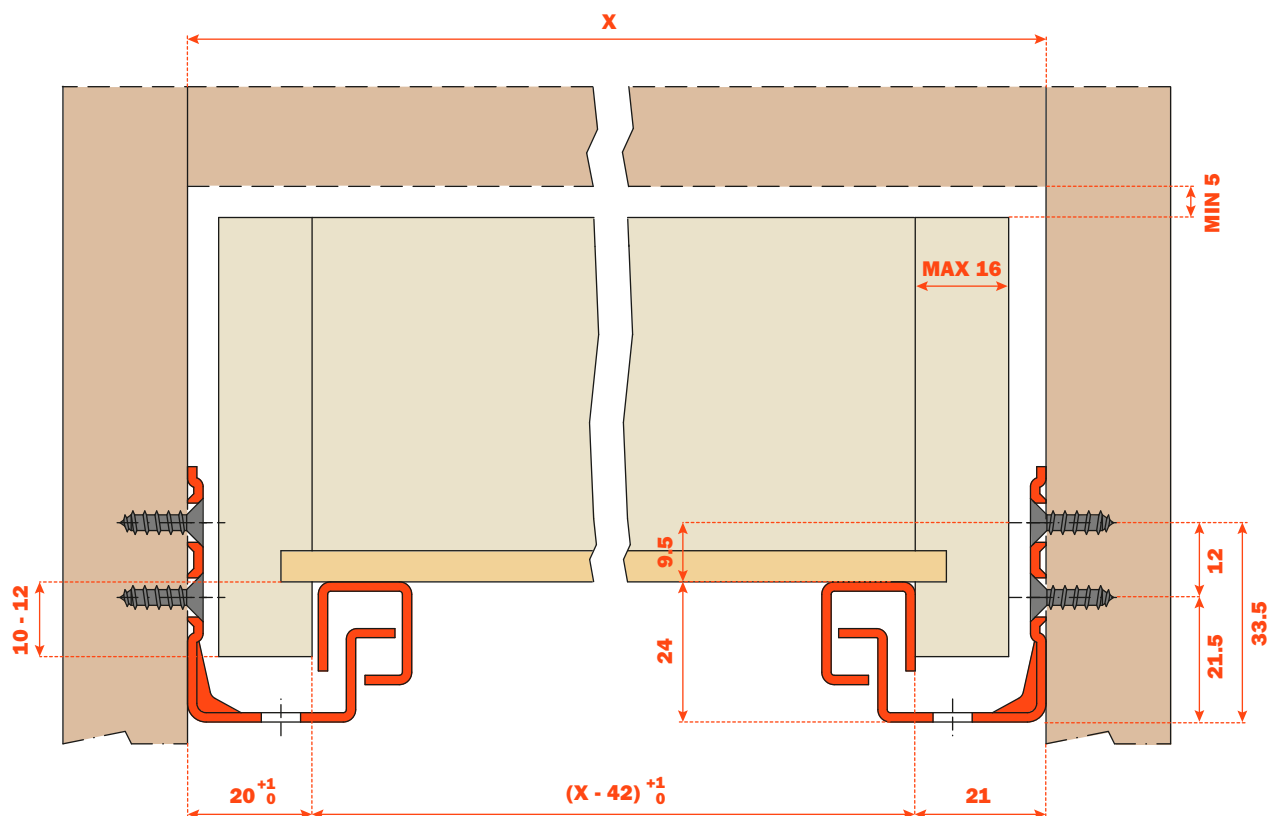

Part number




To be screw fixed
Screw TSP ø 3.5 mm

BASIC PART NUMBER	RUNNER LENGTH (LN)	=	MIN. DEPTH OF THE CABINET (PM)
1061577250200	250		250
1061577270200	270		270
1061577300200	300		300
1061577350200	350		350
1061577400200	400		400
1061577450200	450		450
1061577470200	470		470
1061577500200	500		500
1061577550200	550		550
1061577600200	600		600


Fixing the drawer onto the runners

Clip 1071000010100


Detail of the clip with tool free
integrated height adjustment.

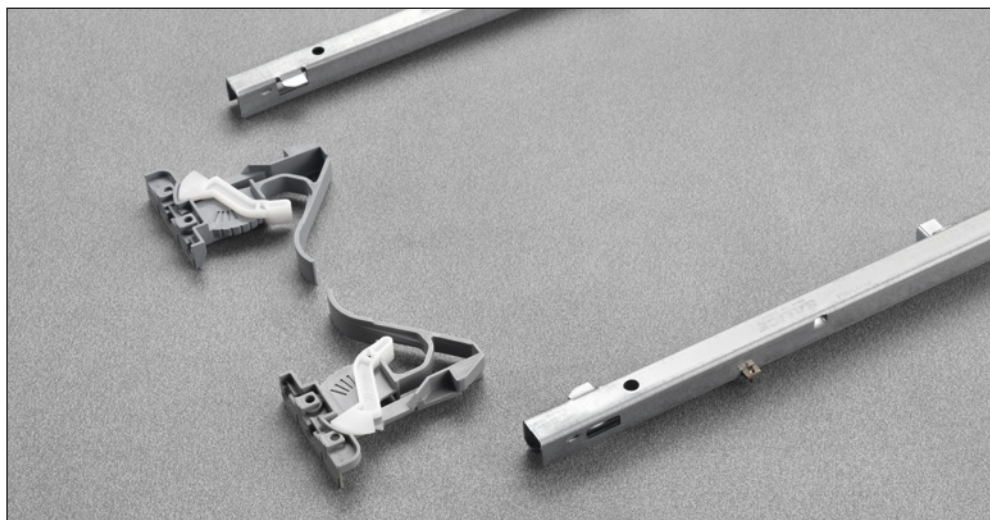

Detail of the Push system
integrated into the runner which
allows the opening of handle-less
drawers.

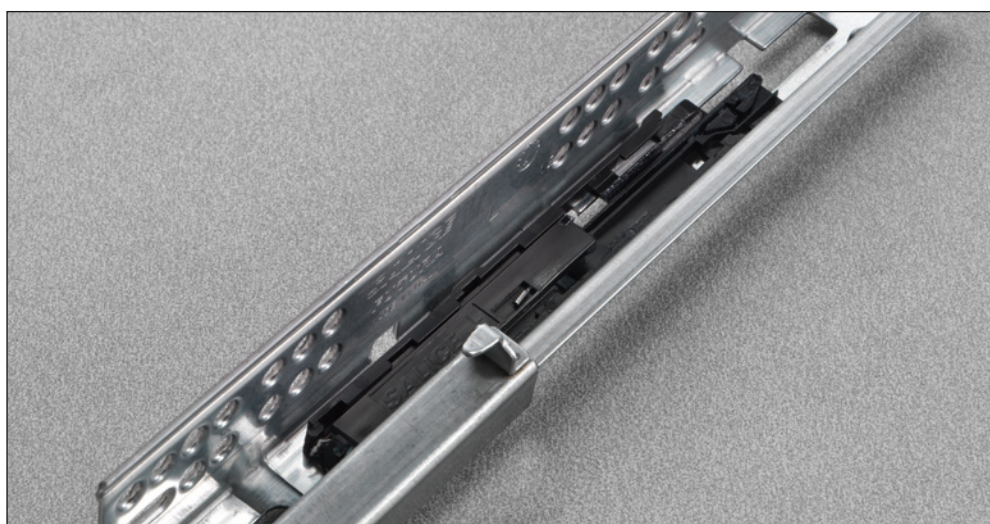

Futura Push 65277 - Concealed runner

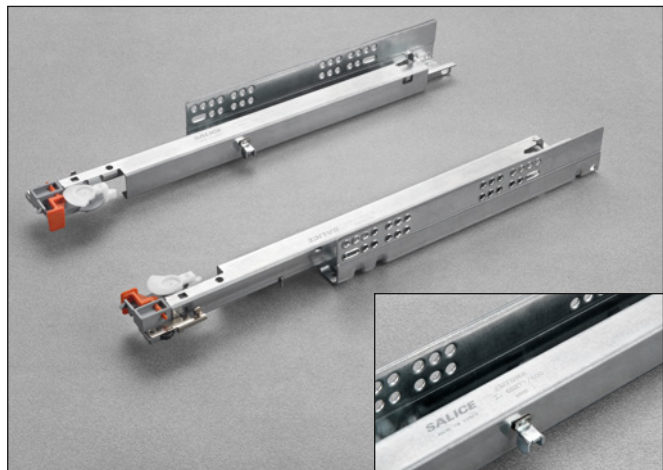


Full-extension runner fixed to the drawer by pin-fix clip.

Push: the new opening system for handle-less drawers, is fully integrated in the runner.


A slight pressure of the drawer frontal is sufficient for the drawer to self-open.

Product features


- Dynamic load capacity N 294 (Kg 30).
- Push opening system.
- Safety system that prevents the drawer from overturning.
- Drawer height adjustment +3 mm.
- Drawer depth adjustment ± 2 mm.
- The drawer is maintained parallel with the cabinet side during opening.
- Drawer fixing without screws.
- The drawer is held in the closed position.
- Synchronisation system for the opening of large drawers (optional) available for all runner lengths.
- Compatible with ART. 61277.
- Finish: bright zinc-plated.

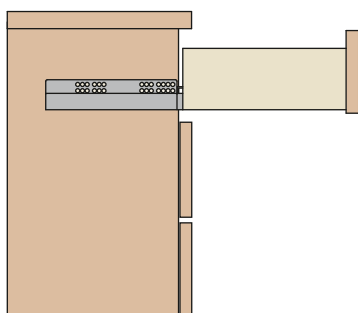

Dimensions

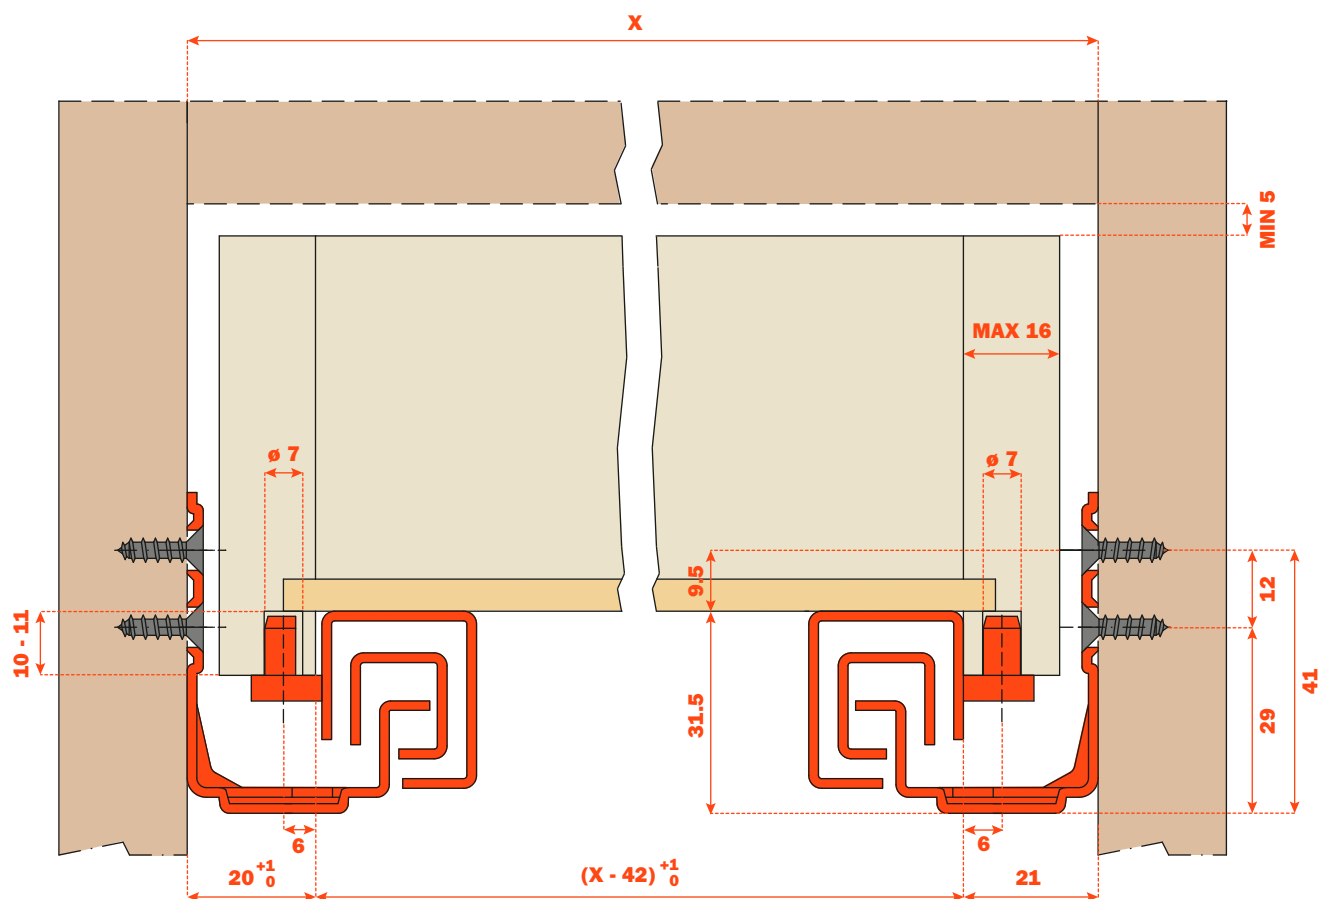

Part number



To be screw fixed
Screw TSP \varnothing 3.5 mm

BASIC PART NUMBER	RUNNER LENGTH (LN)	MIN. DEPTH OF THE CABINET (PM)
1065277250200	250	260
1065277270200	270	280
1065277300200	300	310
1065277350200	350	360
1065277400200	400	410
1065277450200	450	460
1065277470200	470	480
1065277500200	500	510
1065277550200	550	555
1065277600200	600	605


Fixing the drawer onto the runners

The flexibility of the system enables the locating pin to be engaged simply by placing the drawer onto the runners and closing it.




Detail of the pin-fix clip premounted on the runner, with:


- Tool free height and depth adjustment;
- Safety device to prevent the drawers from turning over;
- Locating pin.

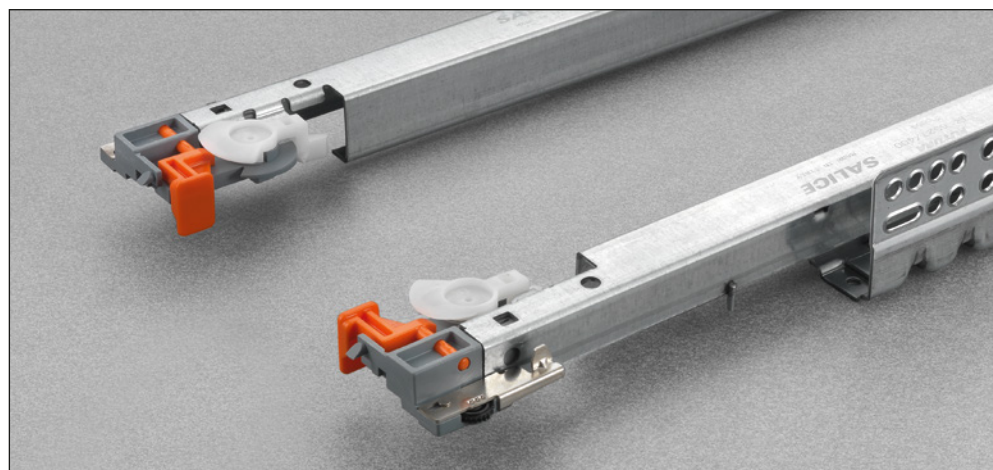

Detail of the Push system integrated into the runner which allows the opening of handle-less drawers.

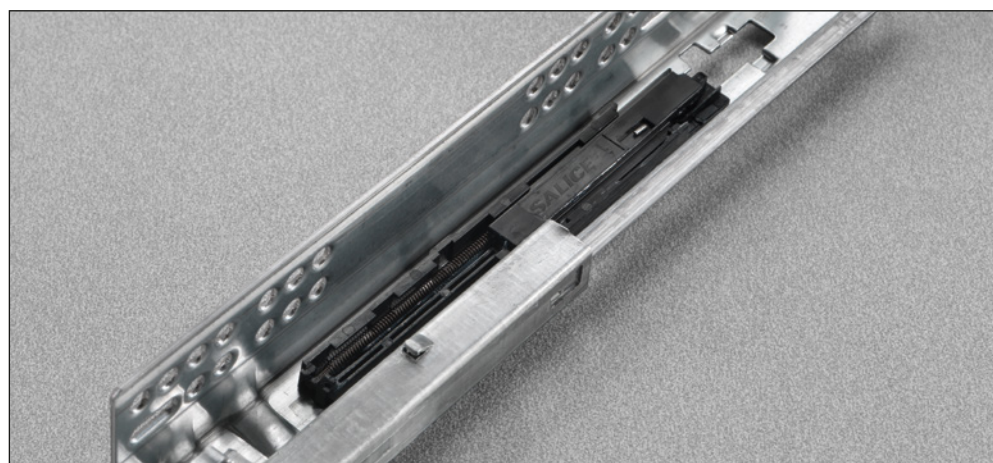

Futura Push 65577 - Concealed runner

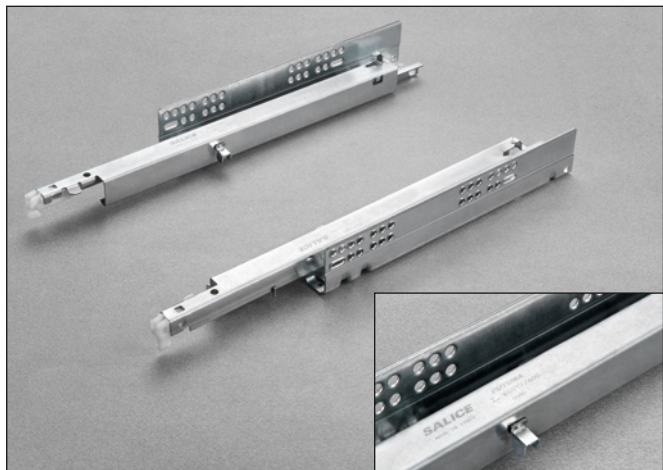


Full-extension runner fixed to the drawer by clip.

Push: the new opening system for handle-less drawers, is fully integrated in the runner.


A slight pressure of the drawer frontal is sufficient for the drawer to self-open.

Product features


- Dynamic load capacity N 294 (Kg 30).
- Push opening system.
- Safety system that prevents the drawer from overturning.
- Drawer height adjustment +2.5 mm with clip 10 710.
- Drawer height adjustment +2.5 mm, side adjustment ± 1.5 mm depth adjustment ± 2 mm with clip 10 750.
- The drawer is maintained parallel with the cabinet side during opening.
- The drawer is held in the closed position.
- Synchronisation system for the opening of large drawers (optional) available for all runner lengths.
- Compatible with ART. 61577.
- Finish: bright zinc-plated.

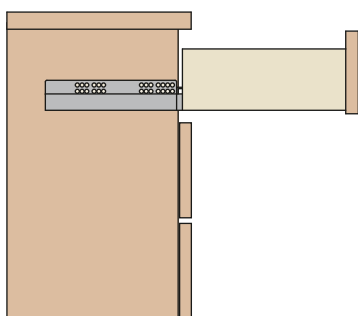

Dimensions

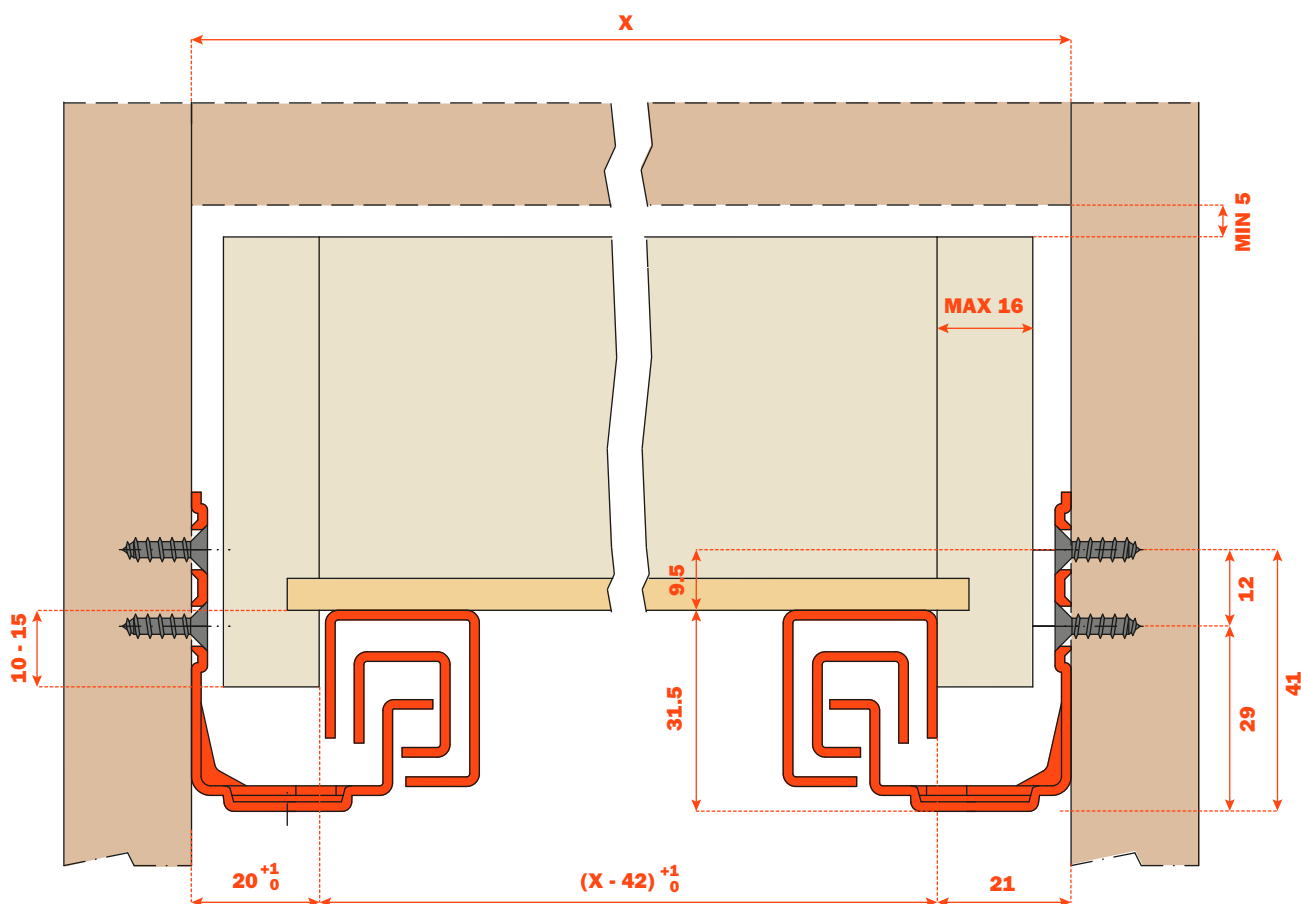

Part number




To be screw fixed
Screw TSP \varnothing 3.5 mm

BASIC PART NUMBER	RUNNER LENGTH (LN)	MIN. DEPTH OF THE CABINET (PM)
1065577250200	250	260
1065577270200	270	280
1065577300200	300	310
1065577350200	350	360
1065577400200	400	410
1065577450200	450	460
1065577470200	470	480
1065577500200	500	510
1065577550200	550	555
1065577600200	600	605

Fixing the drawer onto the runners


Clip 1071000010100

Detail of the clip with tool free integrated height adjustment.

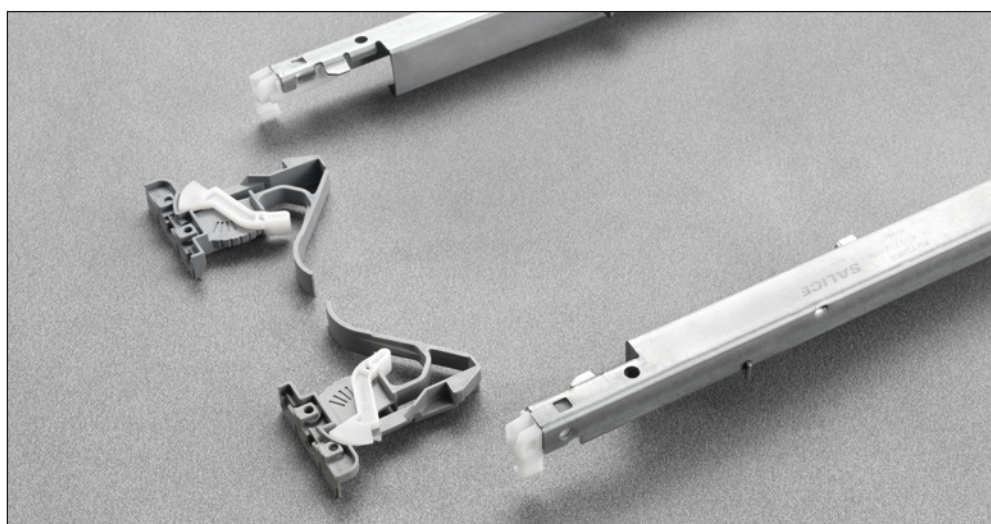

Clip 1075000010100


Detail of the tool free integrated 3-way adjustment clip (height, depth and side adjustment).

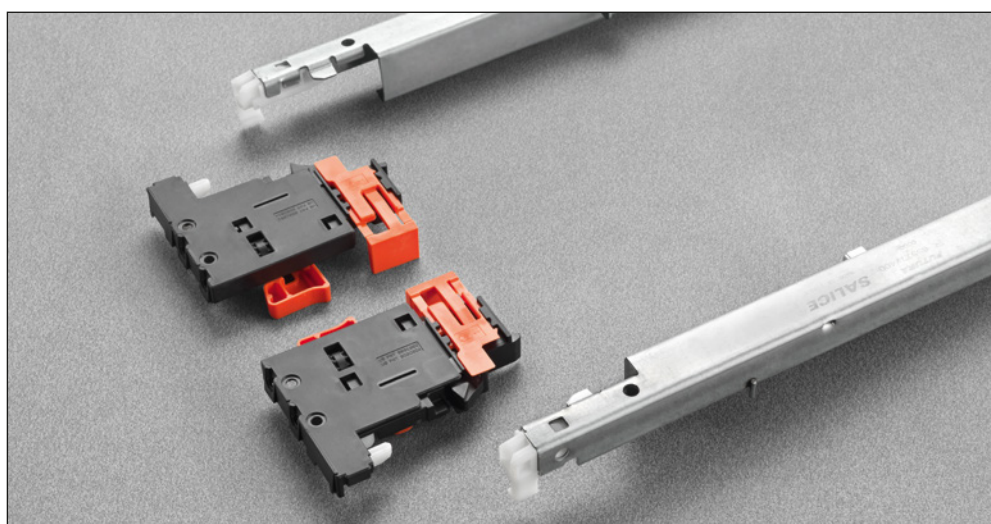



Futura Smove

Part number




To be screw fixed
Screw TSP ø 3.5 mm

BASIC PART NUMBER	RUNNER LENGTH (LN)	=	MIN. DEPTH OF THE CABINET (PM)
1061250250200	250		250
1061250270200	270		270
1061250300200	300		300
1061250350200	350		350
1061250400200	400		400
1061250450200	450		450
1061250470200	470		470
1061250500200	500		500
1061250550200	550		550
1061250600200	600		600


Fixing the drawer onto the runners

The flexibility of the system enables the locating pin to be engaged simply by placing the drawer onto the runners and closing it.

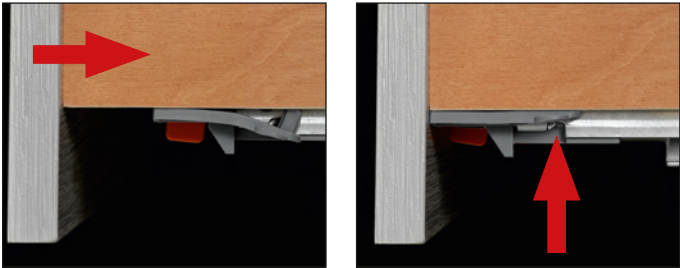

Detail of the pin-fix clip premounted on the runner, with:

- Tool free height adjustment;
- Safety device to prevent the drawers from turning over;
- Locating pin.

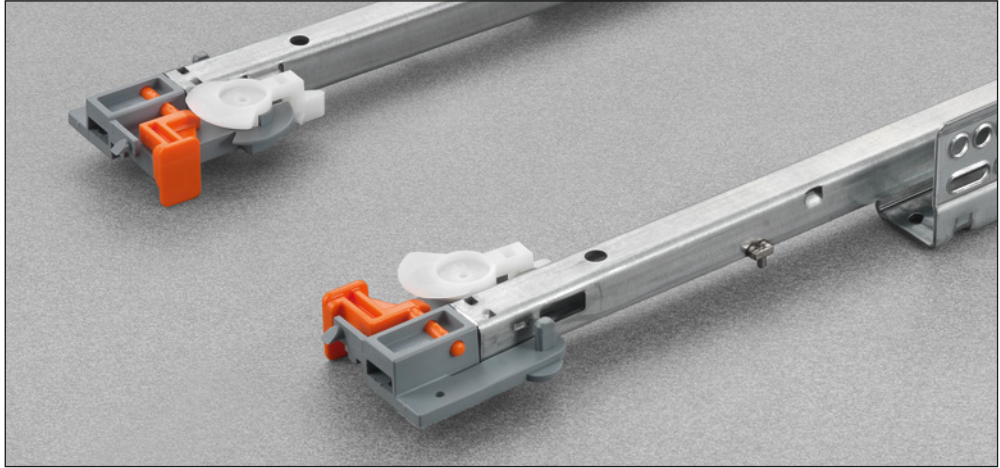

Detail of the Smove system integrated into the runner which allows the decelerated closing of the drawers.



Futura Smove 61550 - Concealed runner




Part-extension runner fixed to the drawer by clip.


Smove: fully integrated in the runner, decelerates the closing action of the drawer.

Product features


- Dynamic load capacity N 294 (Kg 30).
- Smove decelerated closing.
- Safety system that prevents the drawers from turning over.
- Drawer height adjustment +2,5 mm.
- The drawer is maintained parallel with the cabinet side during opening.
- Compatible with ART. 65550.
- Finish: bright zinc-plated.



Dimensions

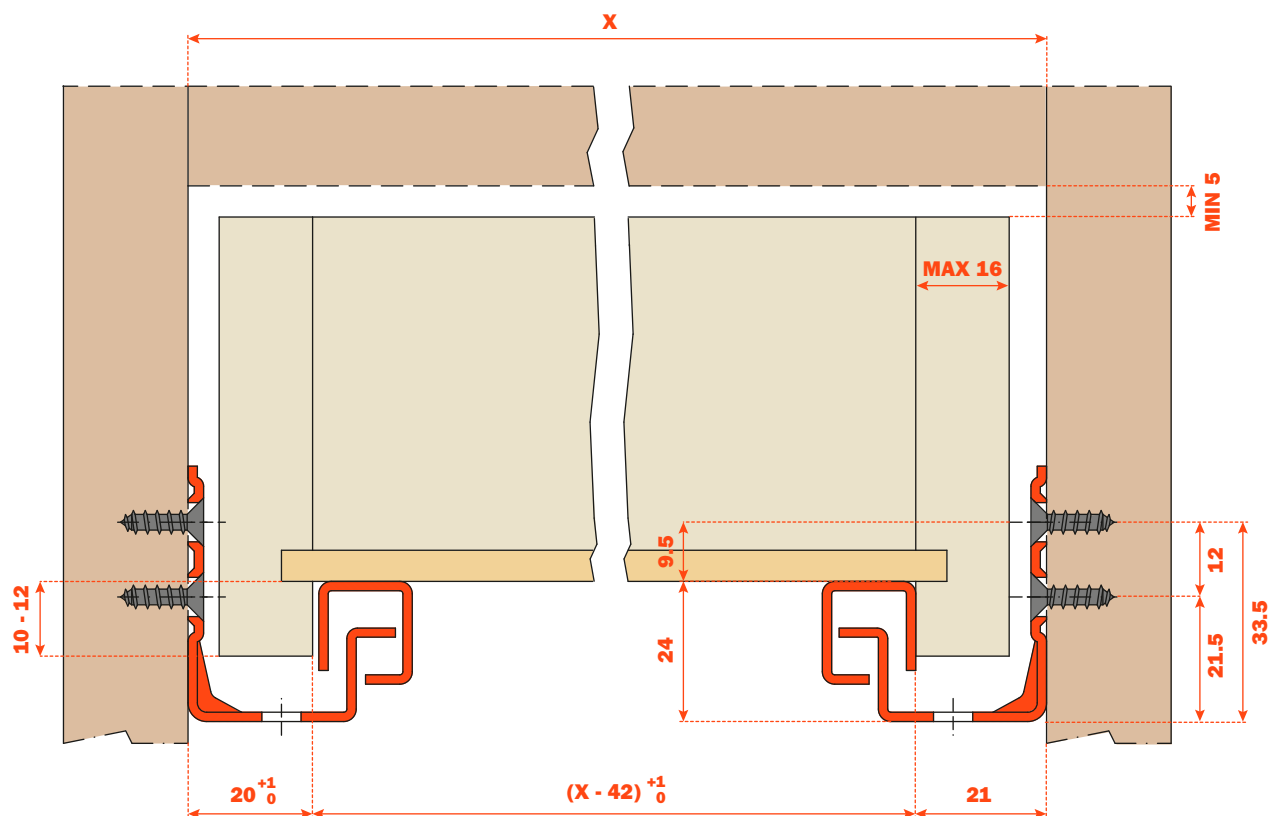

Part number




To be screw fixed
Screw TSP ø 3.5 mm

BASIC PART NUMBER	RUNNER LENGTH (LN)	=	MIN. DEPTH OF THE CABINET (PM)
1061550250200	250		250
1061550270200	270		270
1061550300200	300		300
1061550350200	350		350
1061550400200	400		400
1061550450200	450		450
1061550470200	470		470
1061550500200	500		500
1061550550200	550		550
1061550600200	600		600


Fixing the drawer onto the runners

Clip 1071000010100


Detail of the clip with tool free integrated height adjustment.

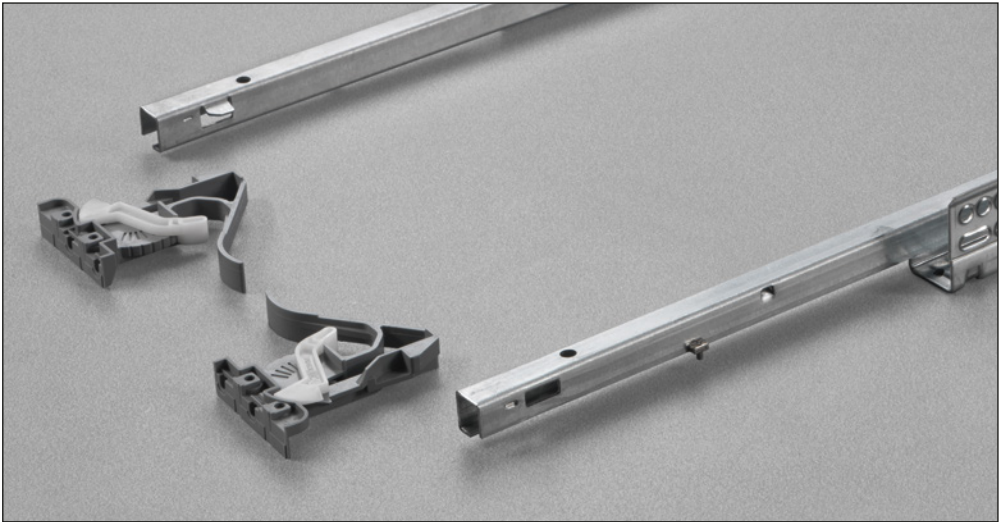

Detail of the Smove system integrated into the runner which allows the decelerated closing of the drawers.

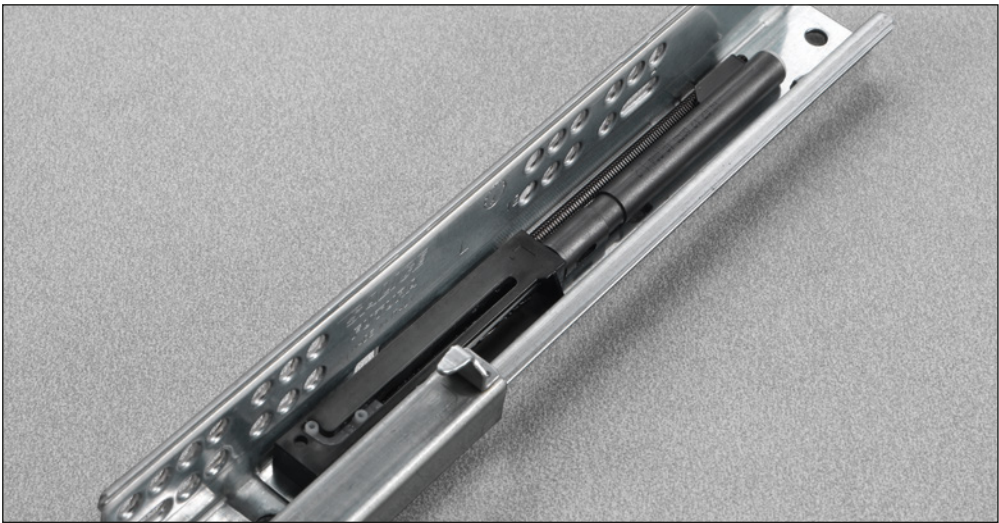

Part number




To be screw fixed
Screw TSP \varnothing 3.5 mm

BASIC PART NUMBER	RUNNER LENGTH (LN)	MIN. DEPTH OF THE CABINET (PM)
1065250250200	250	260
1065250270200	270	280
1065250300200	300	310
1065250350200	350	360
1065250400200	400	410
1065250450200	450	460
1065250470200	470	480
1065250500200	500	510
1065250550200	550	555
1065250600200	600	605


Fixing the drawer onto the runners

The flexibility of the system enables the locating pin to be engaged simply by placing the drawer onto the runners and closing it.

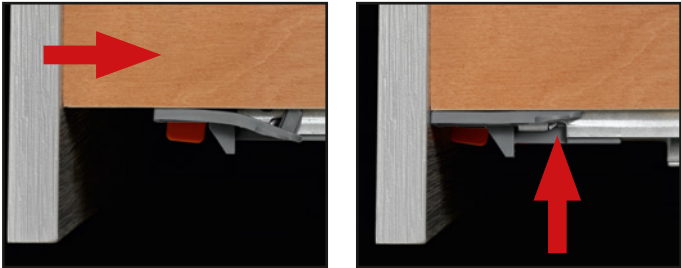


Detail of the pin-fix clip premounted on the runner, with:


- Tool free height adjustment;
- Safety device to prevent the drawers from turning over;
- Locating pin.

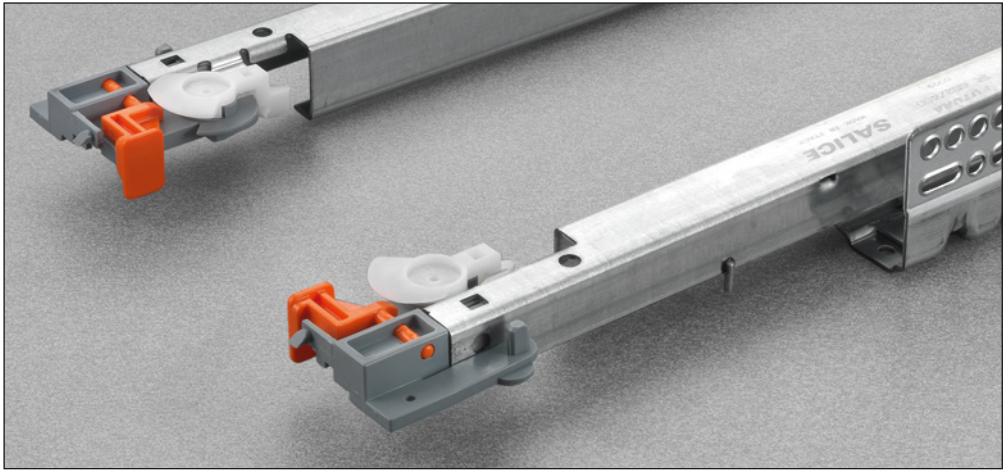

Detail of the Smove system integrated into the runner which allows the decelerated closing of the drawers.

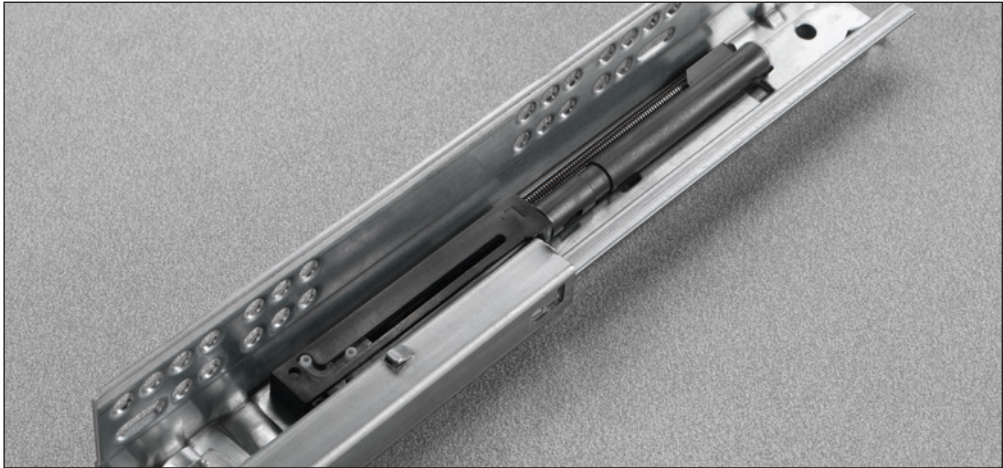

Futura Smove 65550 - Concealed runner

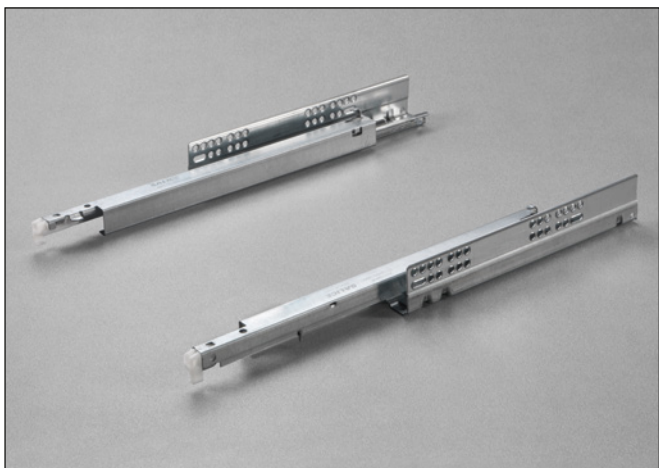


Full-extension runner fixed to the drawer by clip.


Smove: fully integrated in the runner, decelerates the closing action of the drawer.

Product features


- Dynamic load capacity N 294 (Kg 30).
- Smove decelerated closing.
- Safety system that prevents the drawers from turning over.
- Drawer height adjustment +2.5 mm with clip 10 710.
- Drawer height adjustment +2.5 mm, side adjustment ± 1.5 mm, depth adjustment ± 2 mm with clip 10 750.
- The drawer is maintained parallel with the cabinet side during opening.
- Compatible with ART. 61550.
- Finish: bright zinc-plated.

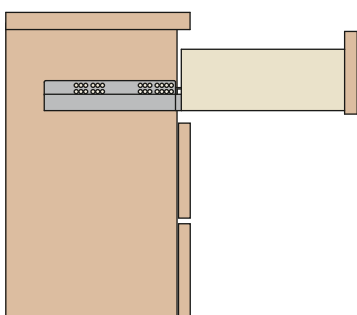

Dimensions

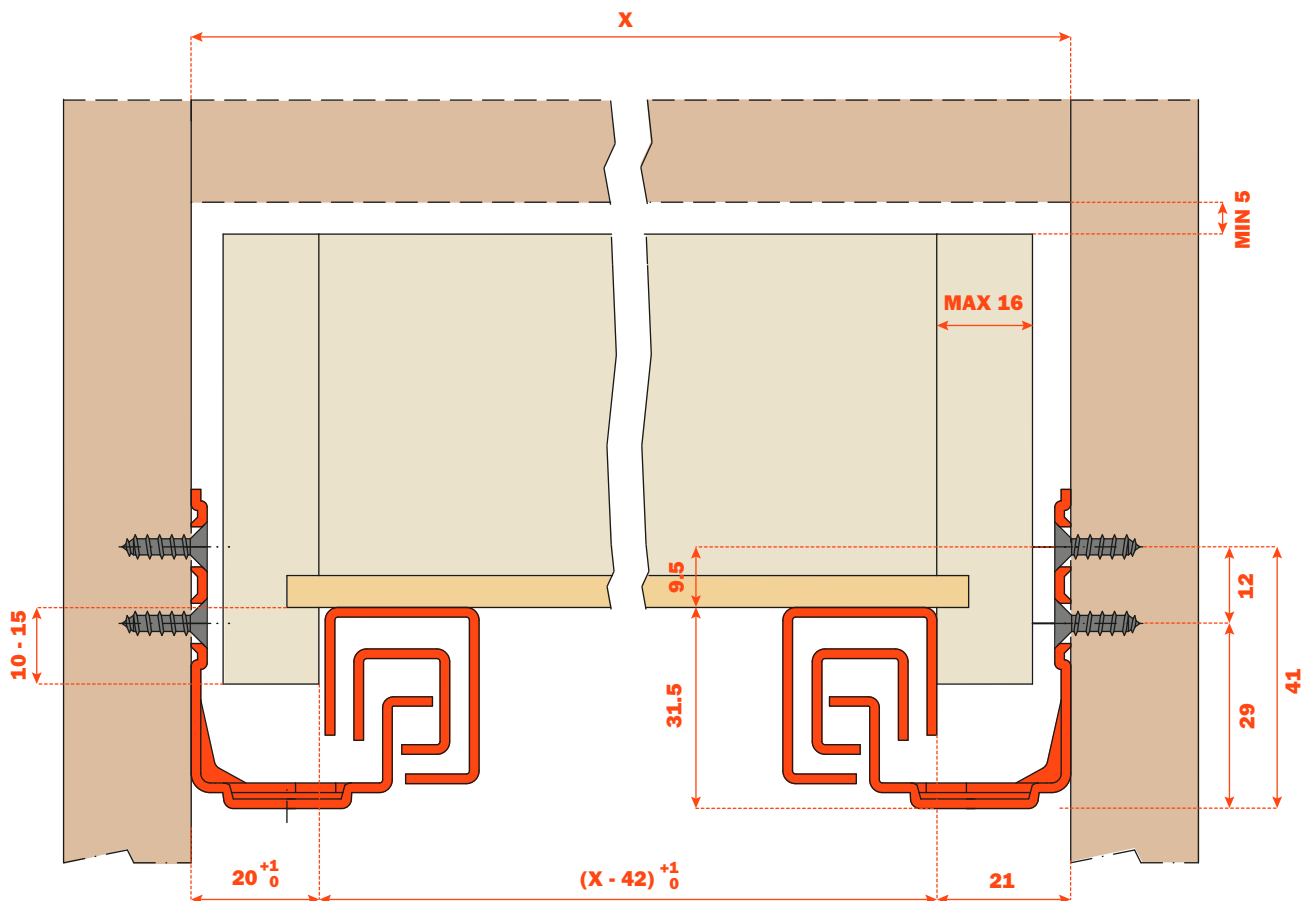

Part number




To be screw fixed
Screw TSP ø 3.5 mm

BASIC PART NUMBER	RUNNER LENGTH (LN)	MIN. DEPTH OF THE CABINET (PM)
1065550250200	250	260
1065550270200	270	280
1065550300200	300	310
1065550350200	350	360
1065550400200	400	410
1065550450200	450	460
1065550470200	470	480
1065550500200	500	510
1065550550200	550	555
1065550600200	600	605

Fixing the drawer onto the runners


Clip 1071000010100


Detail of the clip with tool free integrated height adjustment.

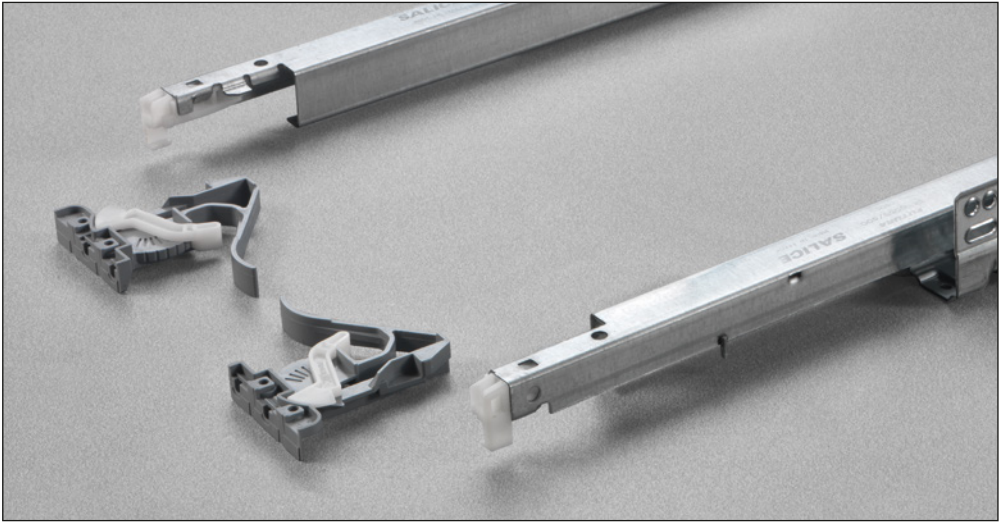

Clip 1075000010100

Detail of the tool free integrated 3-way adjustment clip (height, depth and side adjustment).

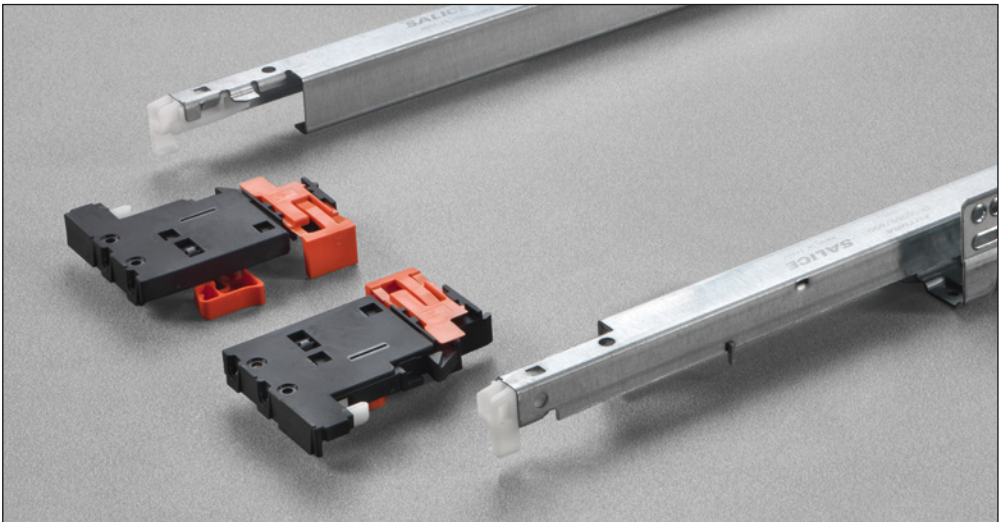

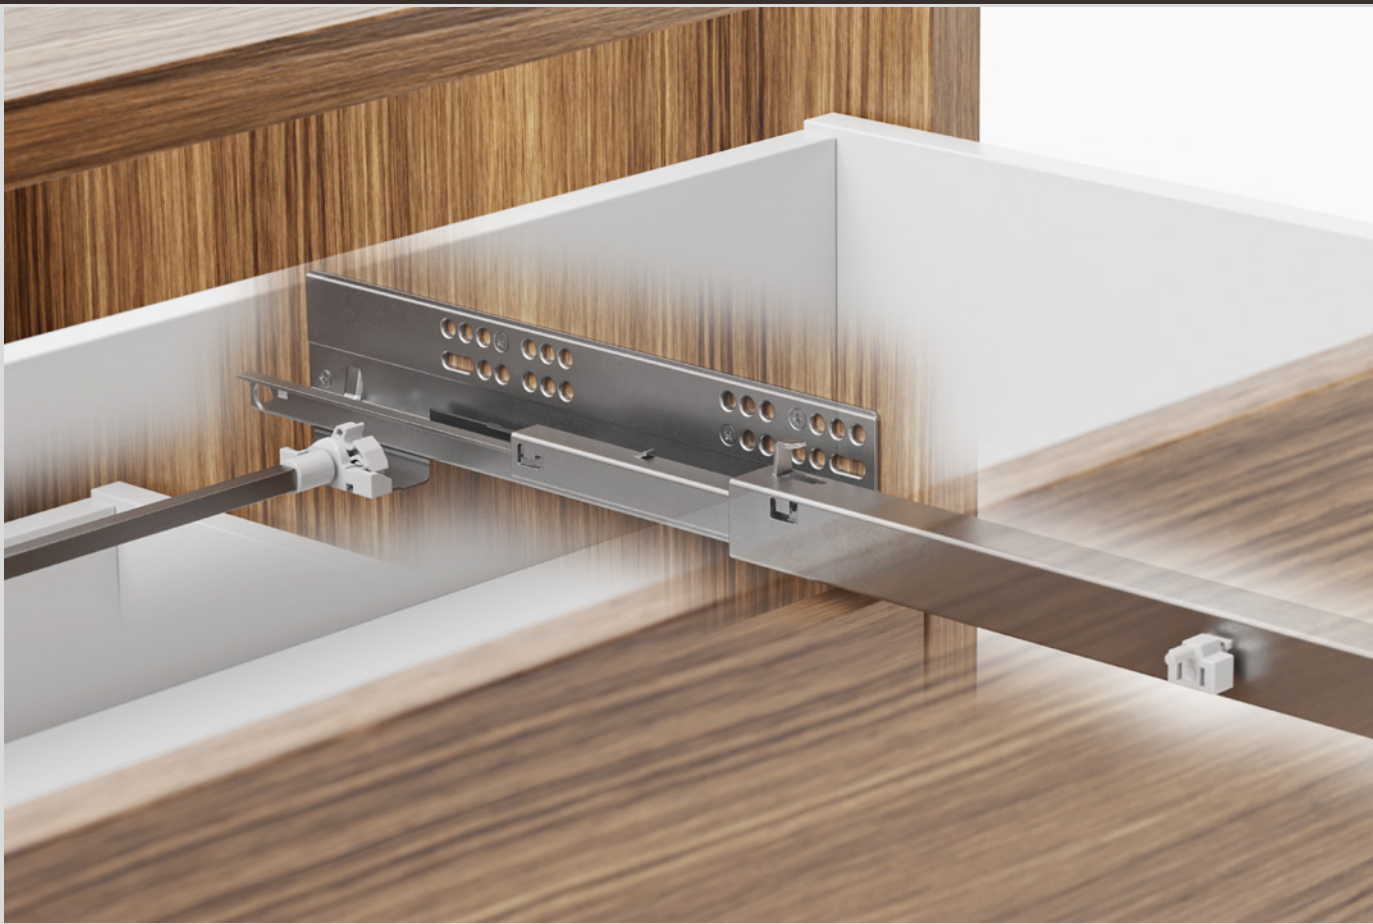

Accessories

Futura Push synchroniser

The synchronisation system for Push-open Futura runners has been developed to ensure that drawers of any width can be opened with minimum effort.

The system links the two runners, which thus become a single element; a pressure at any point of the drawer frontal (even at the extremities), is sufficient for the Push devices to release and consequently for the drawer to self-open.

The synchroniser can be used with any drawer width; its functionality is at its best with wider drawers. It can be used on drawers of any width; however it is recommended for drawers over 80 cm in width.

Product features:


- perfectly silent sliding movement
- the load capacity of the runner remains unchanged
- available on all runner lengths
- min. width of the cabinet (X) = 280 mm
- max. width of the cabinet (X) = 1300 mm
- bar length = 1150 mm (to cut to length)



Technical information - Formula for cutting the bar to length


Part-extension

The assembly of the synchroniser requires a minimum 80 mm wide notch in the rear panel.

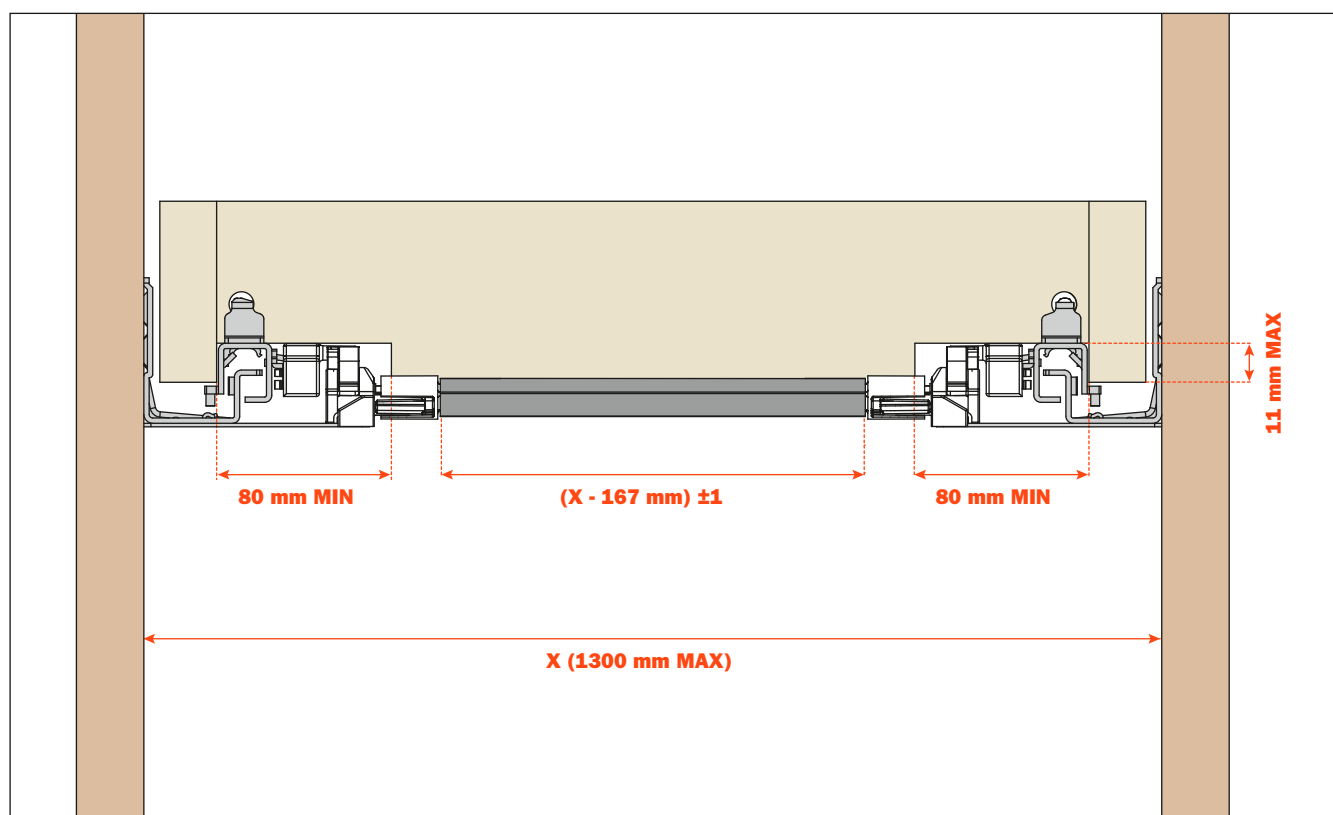


Full-extension

The assembly of the synchroniser requires a minimum 80 mm wide notch in the rear panel.


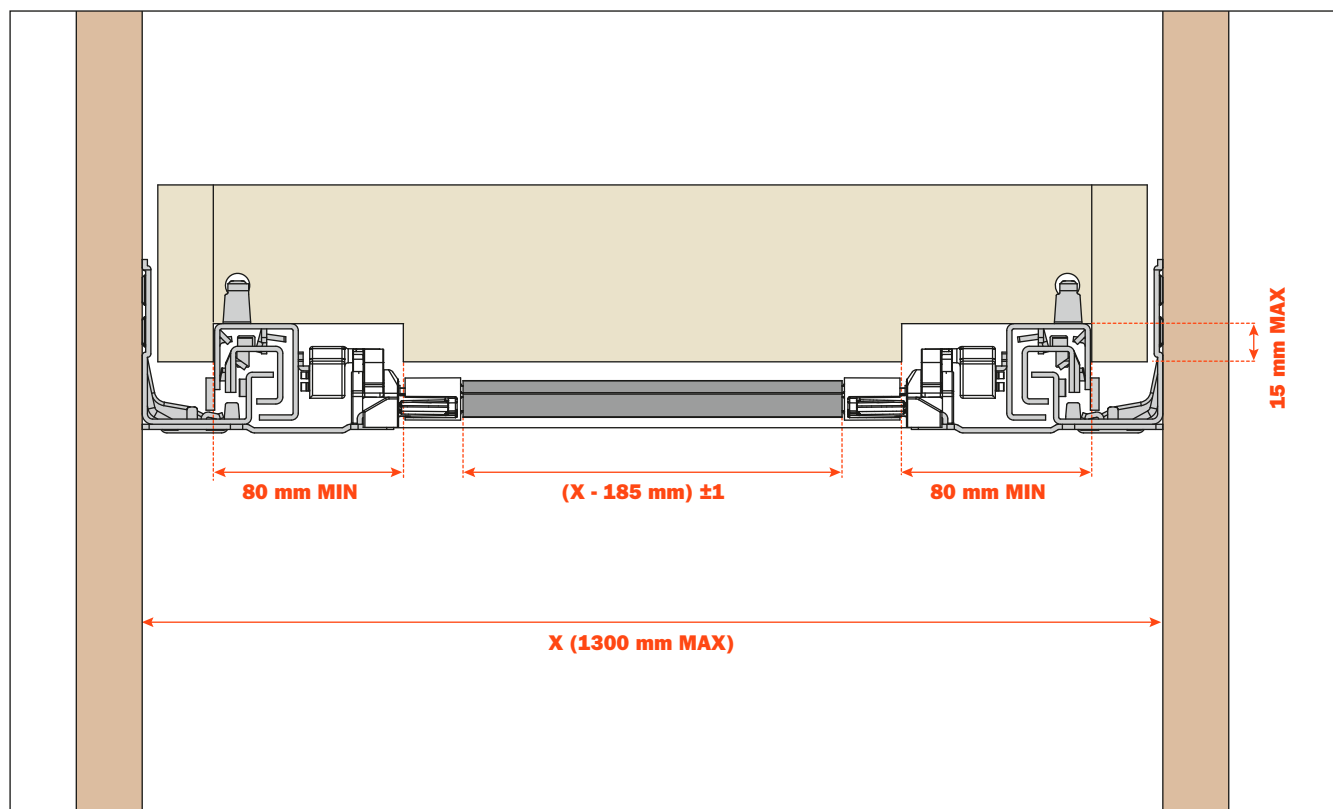


Futura Push synchroniser - Part-extension - Assembly instructions

Fitting the driver pins to the runners

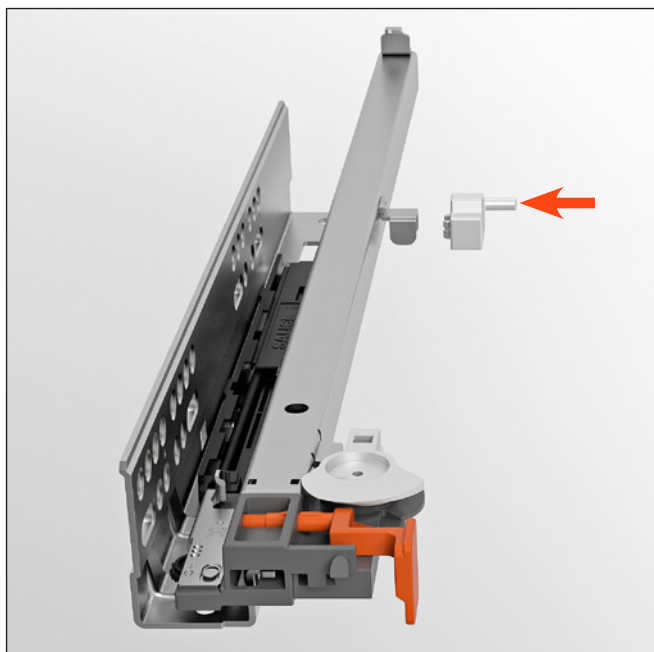


Slide the carrier plates into position on the runners in the direction indicated by the arrows

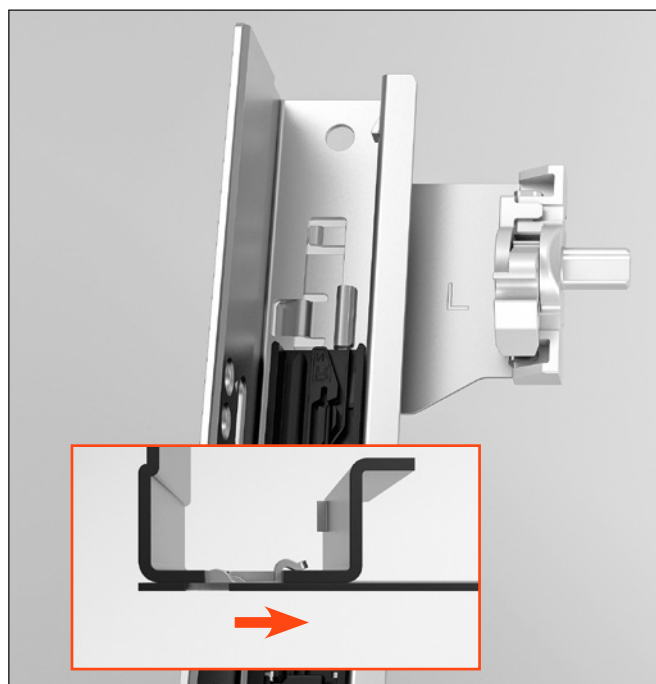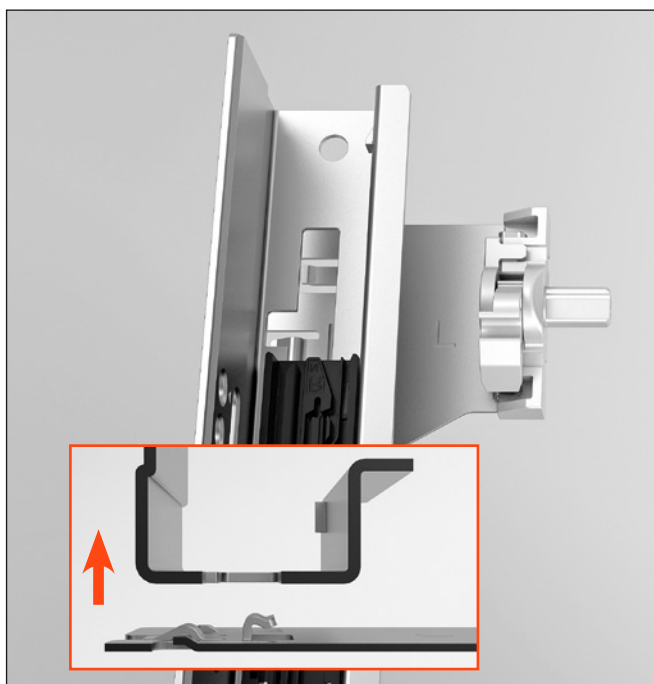

Screw-fix the runners to the cabinet side




Cut the stabiliser bar to length

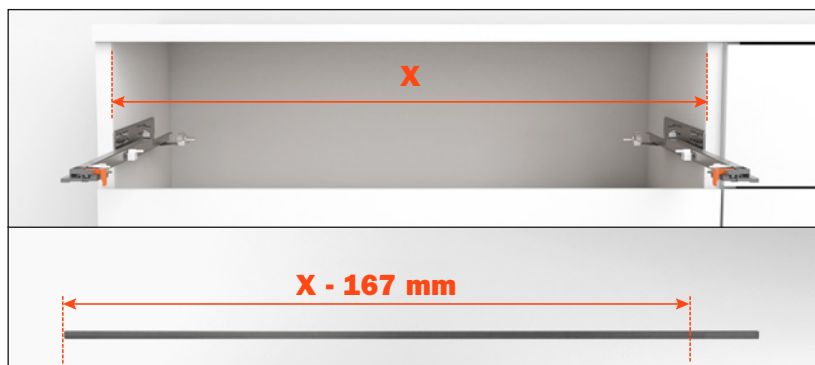

Part-extension - Assembly instructions


1. Press the end caps onto the bar
2. Fix the bar to the plates

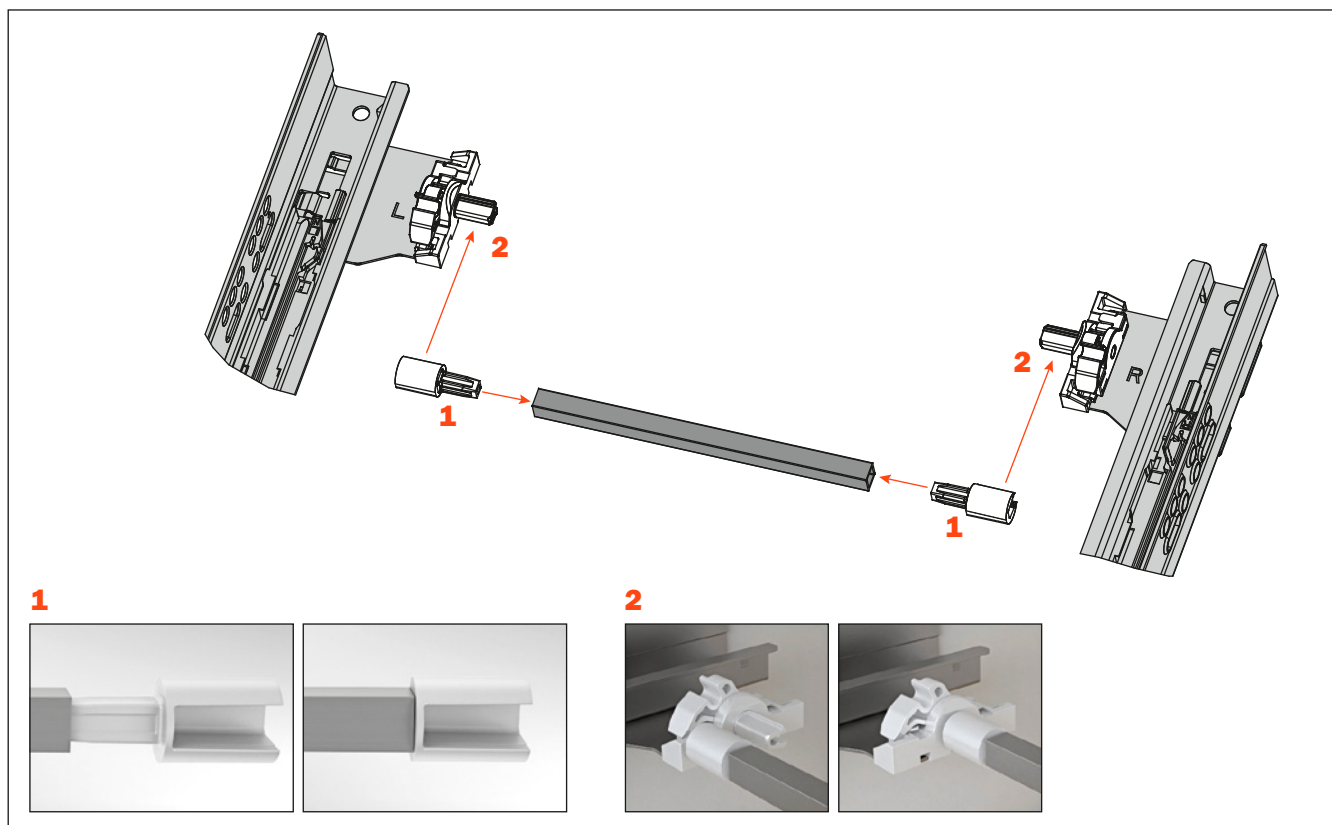

Insert the drawer





A pressure at any point on the drawer frontal is sufficient for the drawer to self-open


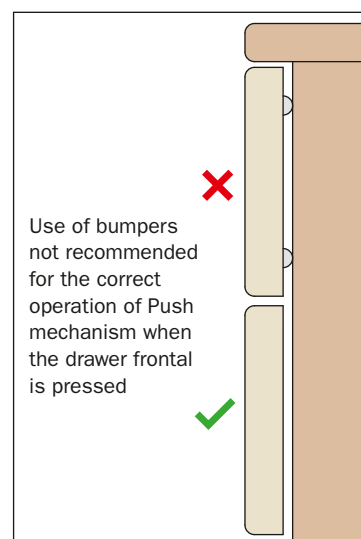


Futura Push synchroniser - Full-extension - Assembly instructions

Fitting the driver pins to the runners

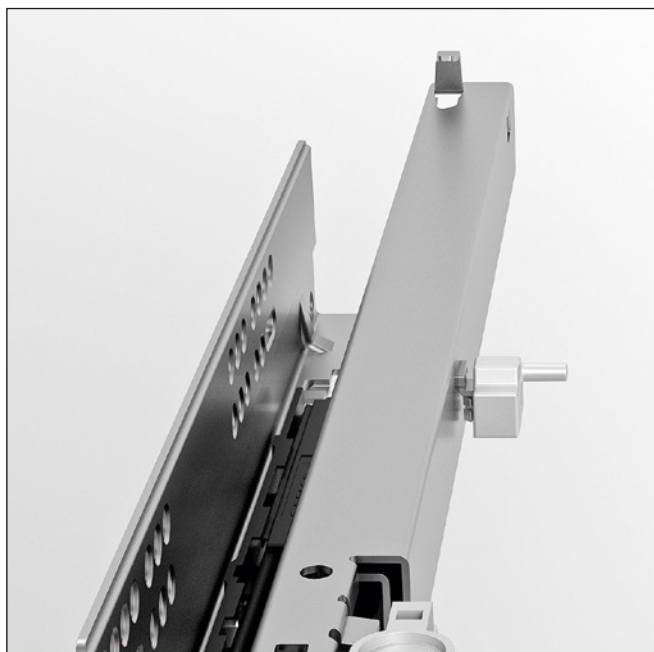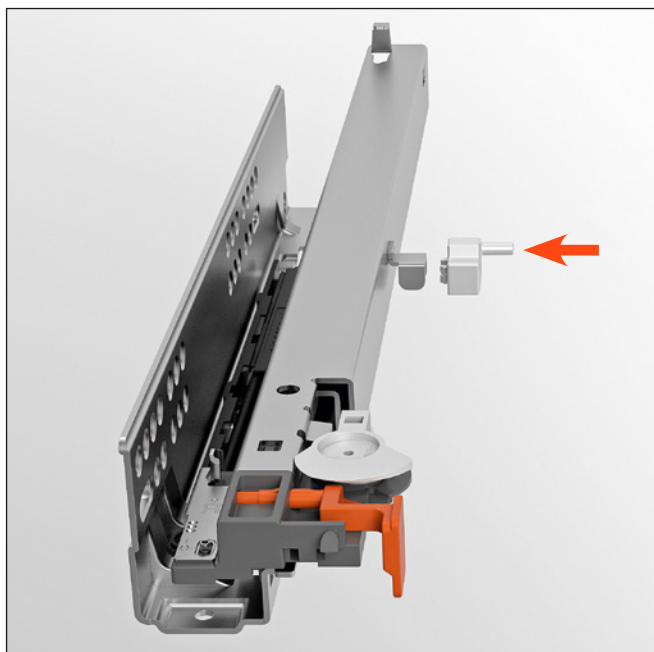

Slide the carrier plates into position on the runners in the direction indicated by the arrows

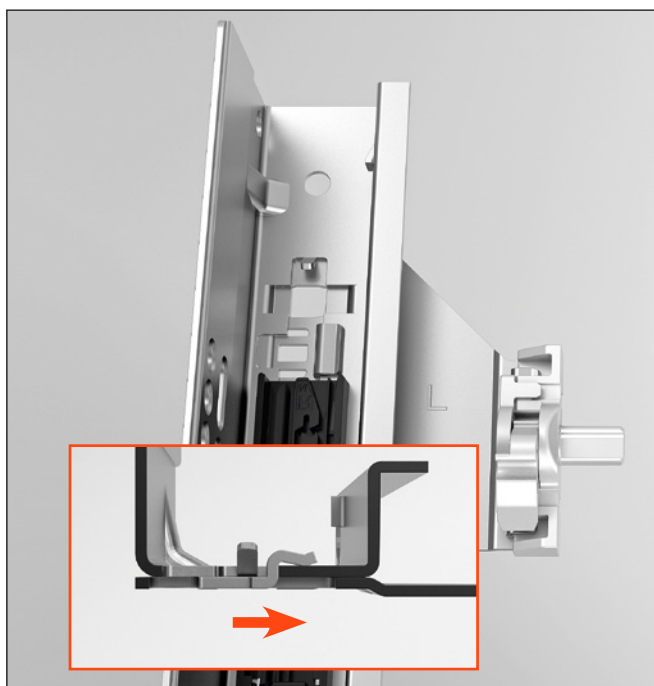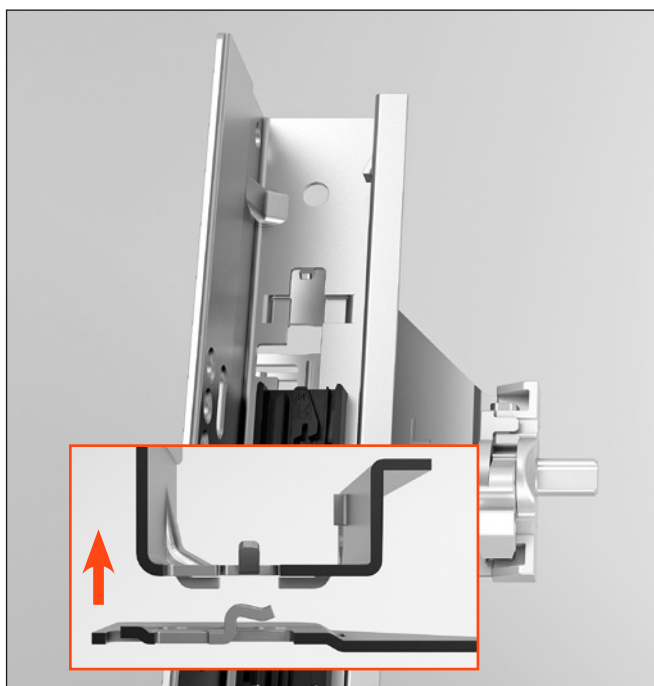

Screw-fix the runners to the cabinet side




Cut the stabiliser bar to length




Assembly instructions


1. Press the end caps onto the bar
2. Fix the bar to the plates

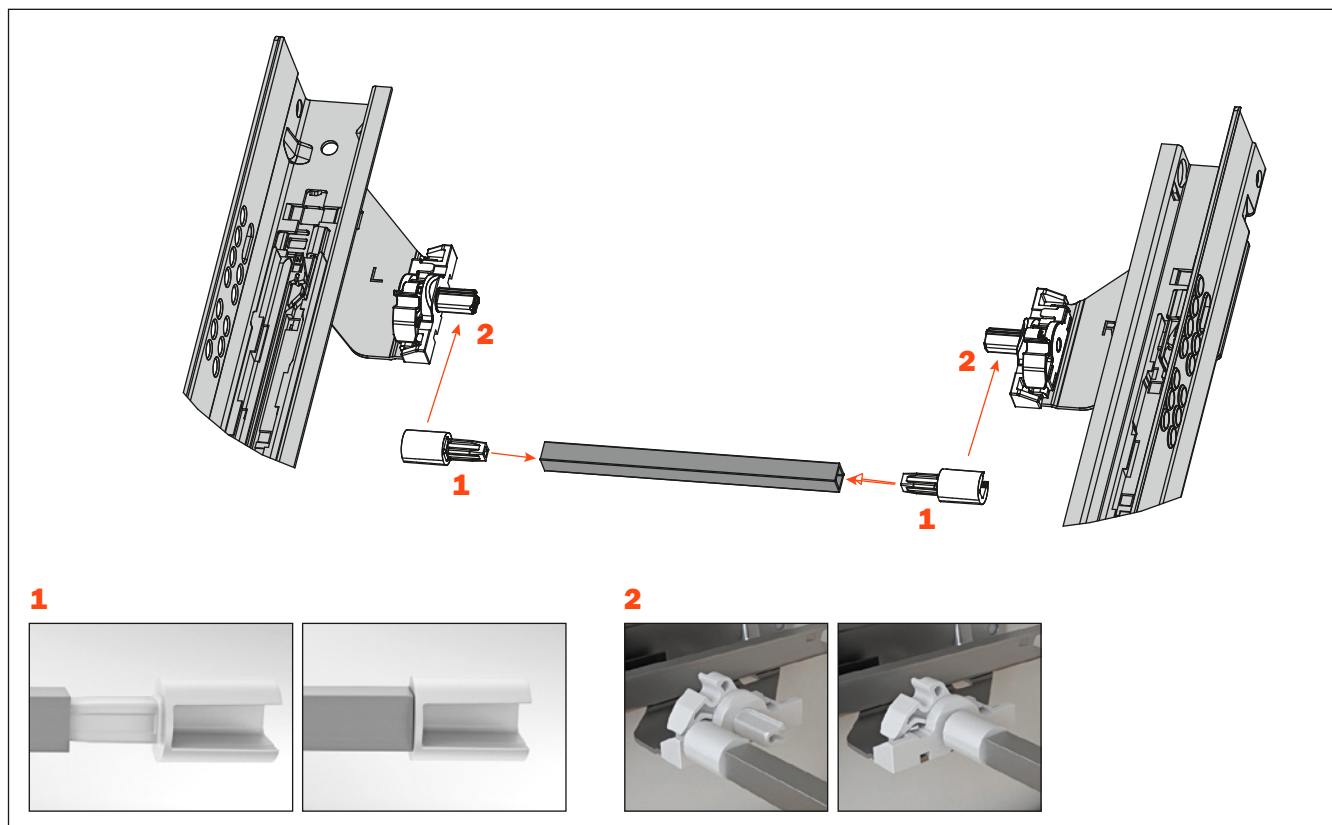

Insert the drawer

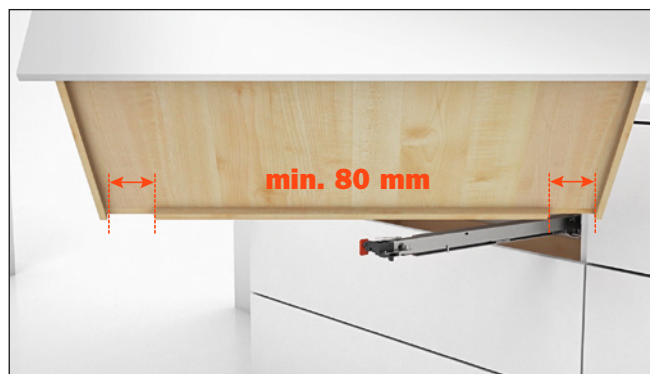

A pressure at any point on the drawer frontal is sufficient for the drawer to self-open

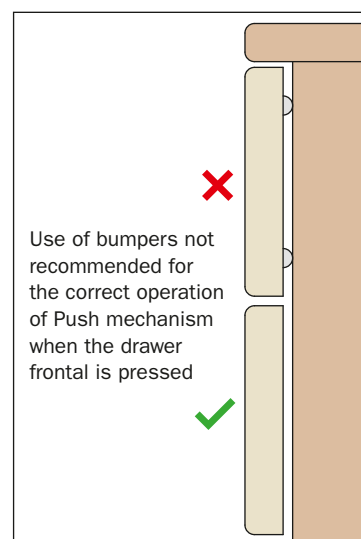

Futura Push synchroniser - Packing

SINGLE PACKING

APKFGP51150

Part-extension

PACKING

1 BOX = 20 single kits

1 KIT:

- 1 stabiliser bar
- 2 end caps
- 2 driver pins
- 1 right carrier plate and 1 left carrier plate



APKFGT51150

Full-extension

PACKING

1 BOX = 20 single kits

1 KIT:

- 1 stabiliser bar
- 2 end caps
- 2 driver pins
- 1 right carrier plate and 1 left carrier plate



INDUSTRIAL PACKING

APKIGP51150

Part-extension

PACKING = 100 kits

1 KIT:

- 1 BOX = 100 stabiliser bars
- 200 end caps
- 200 driver pins
- 1 BOX = 100 right carrier plates
- 1 BOX = 100 left carrier plates

APKIGT51150

Full-extension

PACKING = 100 kits

1 KIT:

- 1 BOX = 100 stabiliser bars
- 200 end caps
- 200 driver pins
- 1 BOX = 100 right carrier plates
- 1 BOX = 100 left carrier plates



Stabilizer for drawers

- To be fitted on both right and left sides of the drawer
- Cam adjustment to allow a perfect bearing of the rollers on the cabinet side
- Combined with Push runners it allows the opening also by pressing the extremities of the drawer
- It improves the overall stability of the drawer



SINGLE PACKING

6869400000202

PACKING

1 BOX = 50 BAGS

1 BAG:

- 2 pcs

- 1 template with assembly instructions

INDUSTRIAL PACKING

6869400000200

PACKING

1 BOX:


- 300 pcs

- 1 template with assembly instructions



Template with assembly instructions

Included in the packing

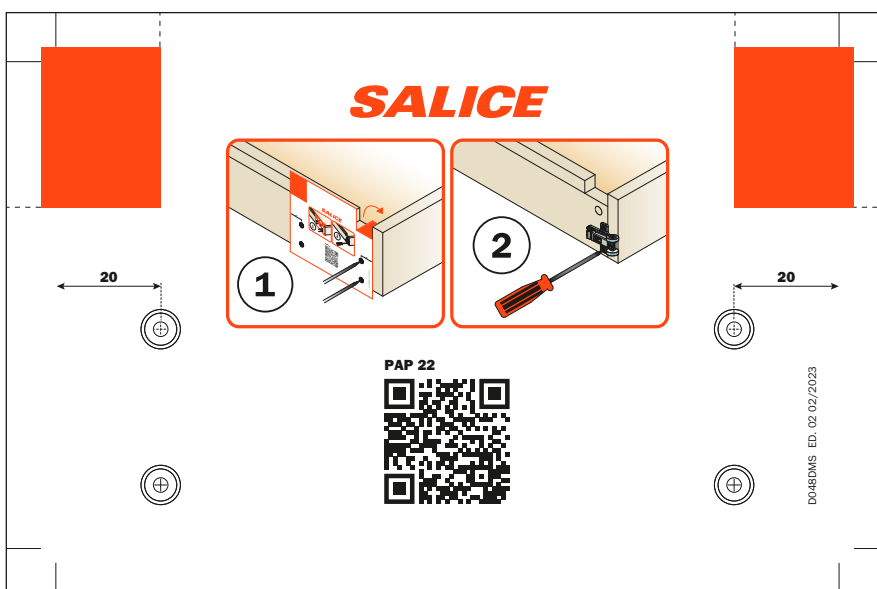




Drawer drilling templates for Futura runners

1099800652009

Template for drawer drilling and 1 way adjustable clip fixing.

PACKING
1 BOX = 50 pcs

Clip 1071000010100

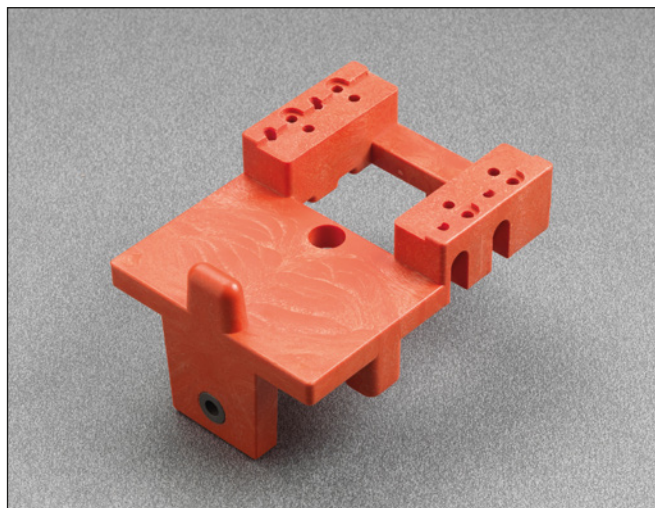
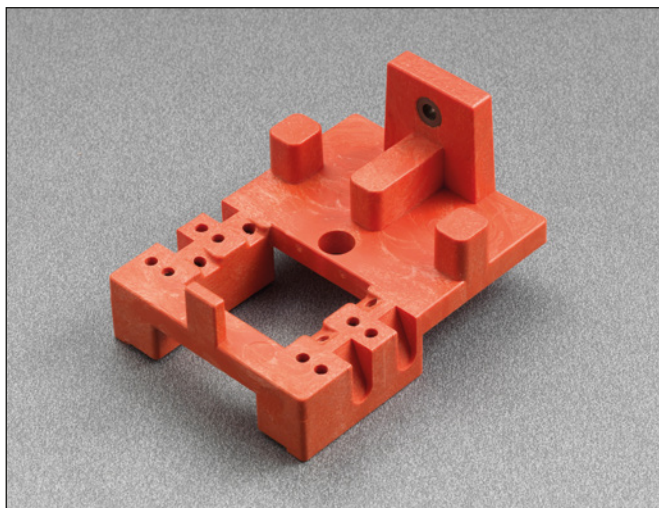
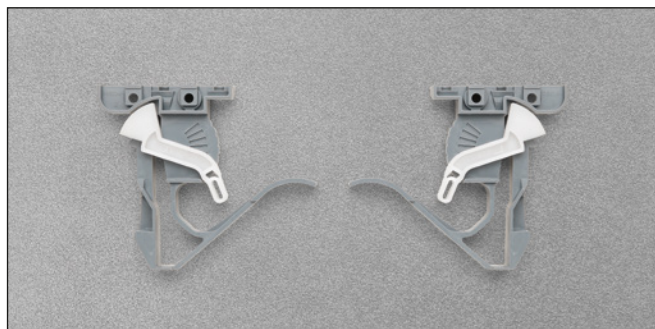


1099800652010


Template for drawer drilling and 3 way adjustable clip fixing.

PACKING
1 BOX = 50 pcs

Clip 1075000010100

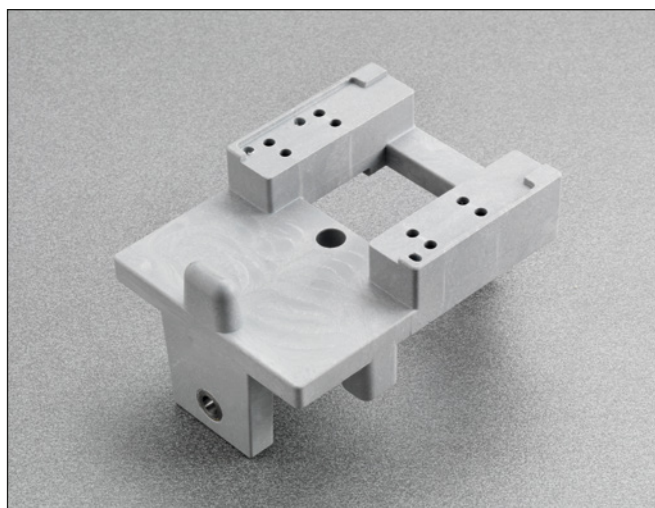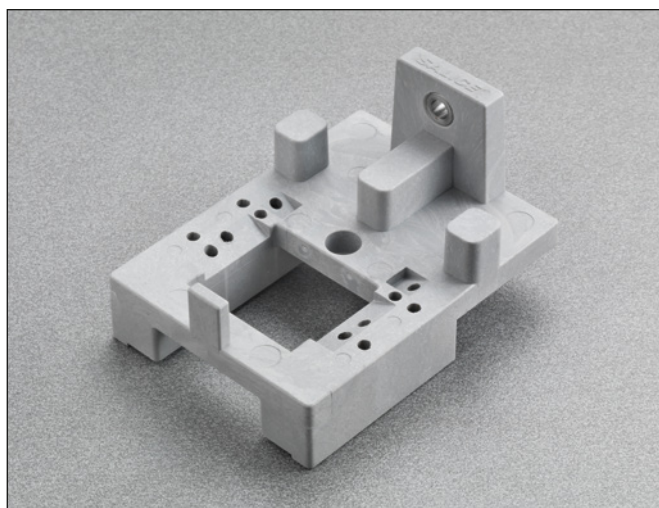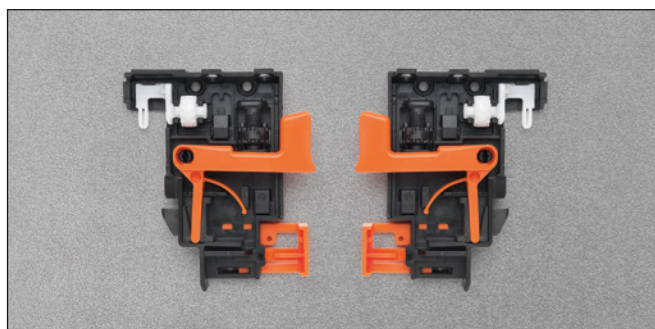

Spacers for Futura runners

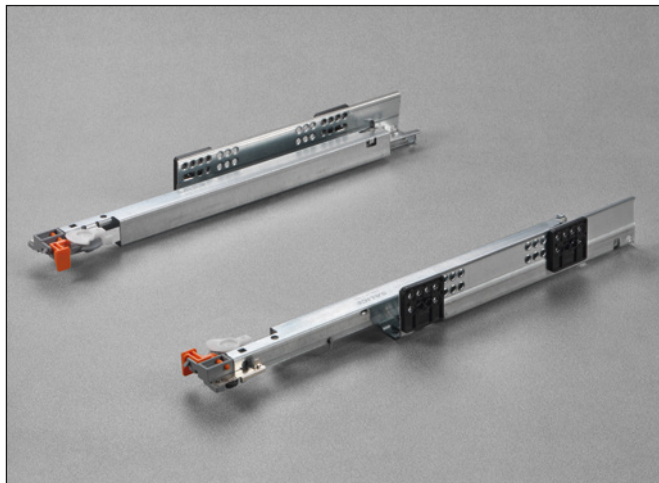

825104145

Spacer, thickness 4.5 mm

PACKING
1 box = 1000 pcs





825104160

Spacer, thickness 6 mm

PACKING
1 box = 800 pcs

To be used to compensate for different assembly widths or the projection of the door.

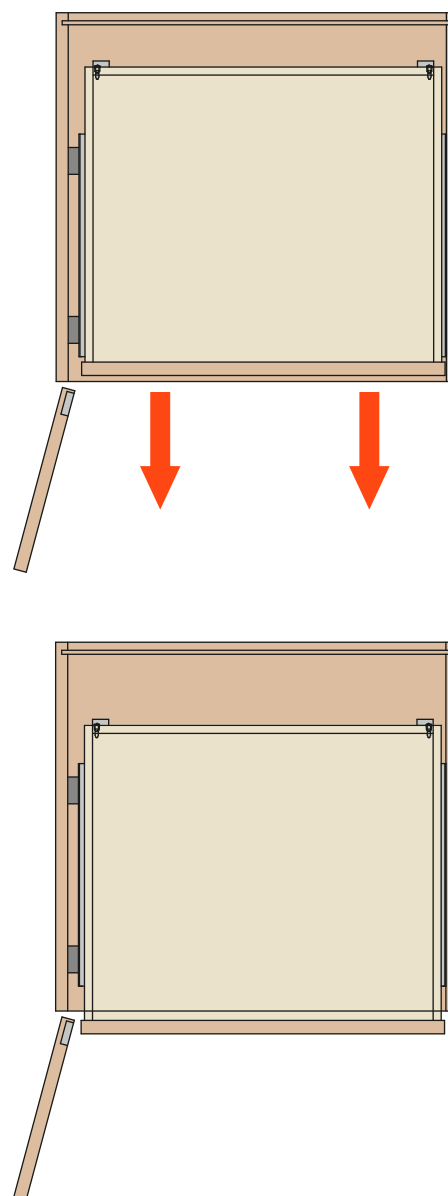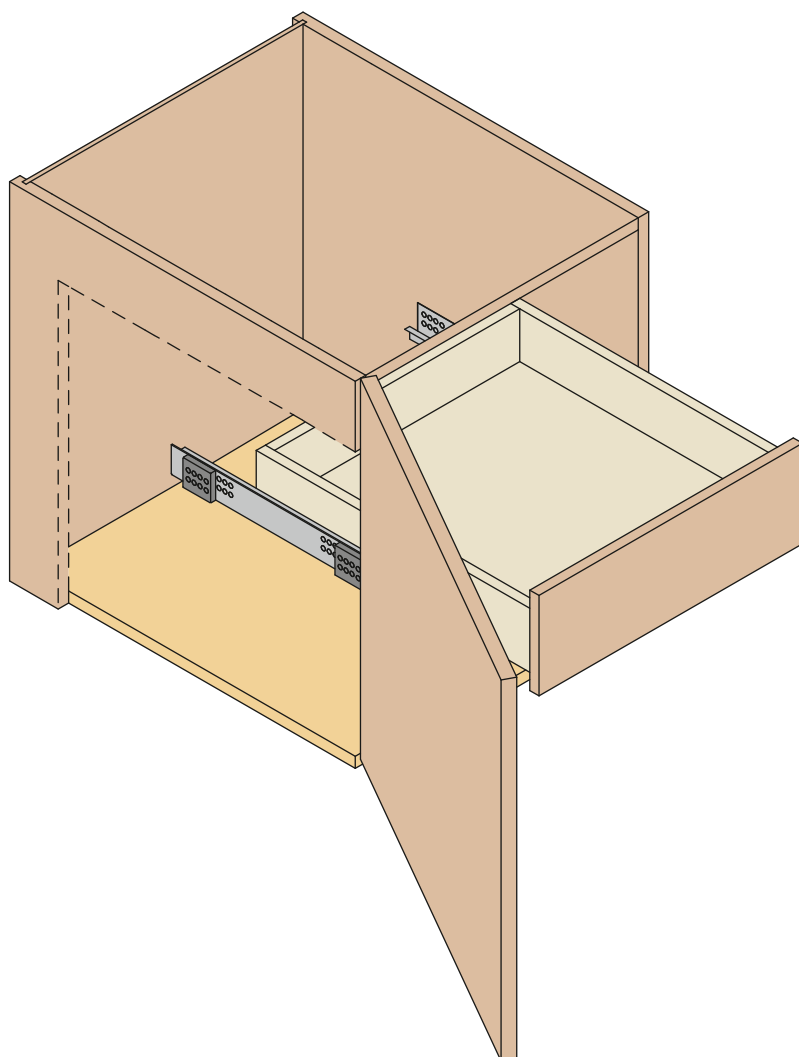

Fixing screws


Wood screw

**V234X164I**

ø 4 x 16 mm
Pre-drilling ø 2 x 2 mm


PACKING
1 box = 20.000 pcs

Euro screws

**V136X114I**

Drilling ø 5 x 10 mm

PACKING
1 box = 10.000 pcs

**V136X154I**

Drilling ø 5 x 14 mm

PACKING
1 box = 5.000 pcs

Notes

[illegible]

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

HEADQUARTERS AND PRODUCTION UNITS

ARTURO SALICE S.p.A.

HEAD OFFICE

VIA PROVINCIALE NOVEDRATESE, 10
22060 NOVEDRATE (COMO) ITALIA
TEL. 031 790424 - FAX 031 791508
info.salice@salice.com
www.salice.com

ARTURO SALICE S.p.A.

VIA ARISTIDE MERLONI, 11
61036 COLLI AL METAURO (PU) ITALIA
TEL. 0721 899800
FAX 0721 897980
info.salice@salice.com
www.salice.com

BORTOLUZZI SISTEMI S.p.A.

VIA CADUTI 14 SETTEMBRE 1944, 45
32100 BELLUNO (BL) ITALIA
TEL. 0437 930866
FAX 0437 931442
info@bortoluzzi.com
www.bortoluzzi.com

NUOVA ATIM S.r.l.

VIA IV NOVEMBRE, 52
20019 SETTIMO MILANESE (MI) ITALIA
TEL. 02 33503203
FAX 02 33516514
info@atimspa.com
www.atimspa.com

BRANCHES

DEUTSCHE SALICE GMBH

RUDOLF DIESEL STR. 10
74382 NECKARWESTHEIM
TEL. 07133 9807-0
FAX. 07133 9807-16
info.salice@deutschesalice.de
www.salice.com

DEUTSCHE SALICE GMBH

VERKAUFSBÜRO NORD
RINGSTRASSE 36/A30 CENTER
32584 LÖHNE
TEL. 05731 15608-0
FAX. 05731 15608-10
vknord@deutschesalice.de
www.salice.com

SALICE UK LTD.

KINGFISHER WAY
HINCHINGBROOKE BUSINESS PARK
HUNTINGDON CAMBS PE 29 6FN
TEL. 01480 413831
FAX. 01480 451489
info.salice@saliceuk.co.uk
www.salice.com

SALICE FRANCE S.A.R.L.

285 RUE DE GOA ZAC LES 3 MOULINS
06600 ANTIBES
TEL. 0493 330069
FAX. 0493 330141
info.salice@salicefrance.com
www.salice.com

SALICE ESPAÑA, S.L.U.

C/ AIGUAFREDA 4, P.I. AMETLLA PARK
08480 L'AMETLLA DEL VALLÈS (BARCELONA)
TEL. 0034 938 46 88 61
info.salice@saliceespana.es
www.salice.com

SALICE PORTUGAL UNIP. LDA

SHOWROOM:
TV SÁ E MELO 161 FA
4470-116 MAIA – PORTO
TEL: 00351 224 154 221
Info@saliceportugal.pt
www.salice.com
ARMAZÉM:
VIA ROTA DOS MÓVEIS I 399
4585-325 GANDRA

SALICE CHINA (SHANGHAI) CO. LTD.

RM 602, 6/F, TOWER 1,
3688 YINGGANG DONG ROAD
QINGPU DISTRICT
201703 SHANGHAI, CHINA
TEL. 021 3988-9880
info.salice@salicechina.com
www.salicechina.com

SALICE INDIA PVT. LTD.

1001 & 1002, 10TH FLOOR,
CENTRUM, PLOT NO. C-3,
OPP. WAGLE PRABHAG SAMITI OFFICE,
MIDC AREA, WAGLE INDUSTRIAL ESTATE,
THANE - 400604, MAHARASHTRA
TEL. 022 20812050
info@saliceindia.com
www.salice.com

SALICE CANADA INC.

3500 RIDGEWAY DRIVE,
UNIT#1
MISSISSAUGA, ONTARIO, L5L 0B4
TEL. 905 820 8787
FAX. 905 820 7226
info.salice@salicecanada.com
www.salicecanada.com

SALICE AMERICA INC.

2123 CROWN CENTRE DRIVE
CHARLOTTE NC. 28227
TEL. 704 841 7810
FAX. 704 841 7808
info.salice@saliceamerica.com
www.saliceamerica.com




ARTURO SALICE S.p.A.

HEAD OFFICE

VIA PROVINCIALE NOVEDRATESE, 10
22060 NOVEDRATE (COMO) ITALIA
TEL. 031 790424 - FAX 031 791508

info.salice@salice.com
www.salice.com



Digital contents