



Slider S10 • Slider S20

SALICE



Slider S10

Slider S10



Slider S10 is a coplanar system for kitchen cabinets and small wall cabinets with doors weighing up to 10 kg. Equipped with carriages with double horizontal rollers and connection-free runners that guarantee smoother and quieter movement than ever before. **S10** is flexible: the Flex version can be adapted to any width of cabinet by simply cutting the profiles to measure.

Due to its features, **S10** is ideal for small units used in the kitchen and bathroom or for larger furniture intended for the living room, bedroom and offices.



Slider S10



Technical information

Coplanar two-door cushioned sliding system.
Capacity 10 kg per door.

Individual door properties:


- max. weight per door 10 kg (evenly distributed)
- width:
 - min. 450 mm
 - max. 1200 mm
- height:
 - max. 800 mm
- thickness:
 - min. 16 mm
 - max. 30 mm
 - max. with handle 40 mm
- height from the ground:
 - 35 mm (kitchen cabinet)
- material:
 - a) wood or derived material
 - b) glass with metal frame

Door adjustment:


- vertical adjustment ± 5 mm
- horizontal adjustment ± 2.5 mm

Door front adjustment:


- wall cabinet
 - upper ± 2 mm
 - lower ± 2.5 mm
- kitchen cabinet
 - upper ± 2.5 mm
 - lower ± 2 mm

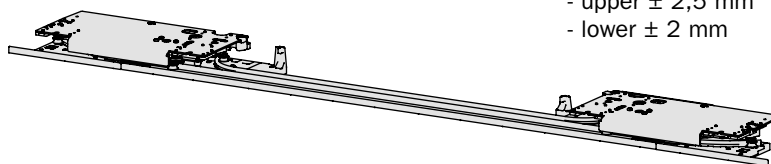

Wall cabinet

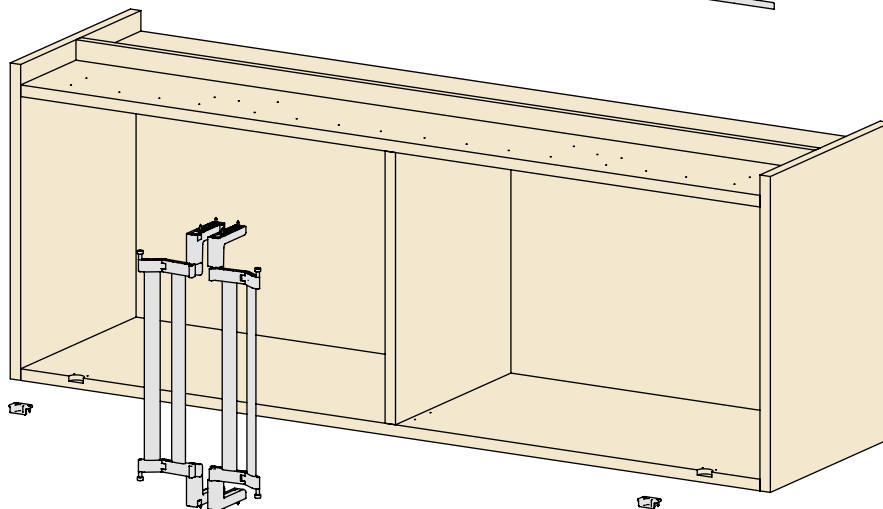


Kitchen cabinet

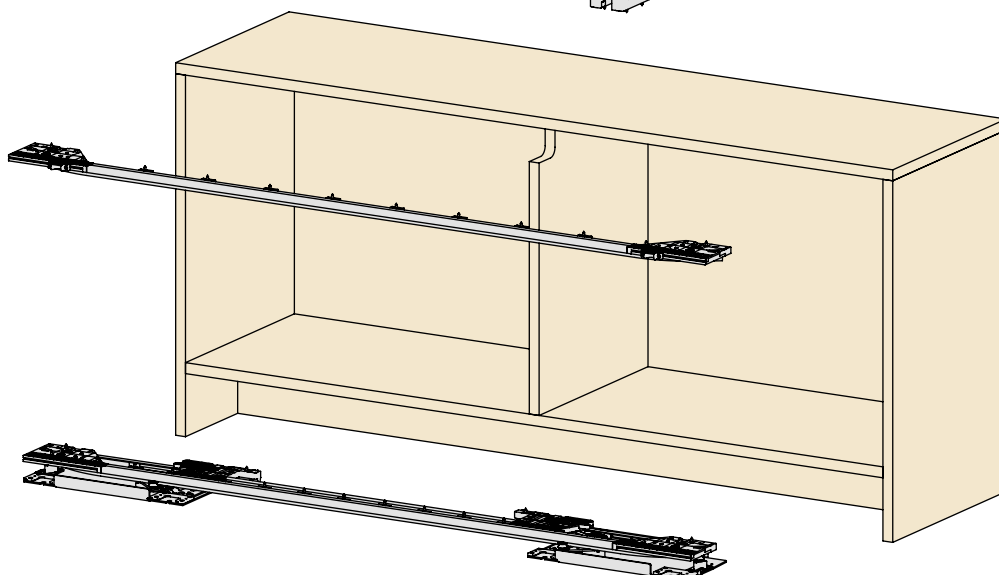


Key feature

- Extremely easy to customise and assemble.
- Secured with screws without the need of drilling or machining the doors and unit.
- Single-piece sliding track.
- Innovative suspended slider with double horizontal wheels.
- Assisted opening and closing.
- Front adjustment of the doors.
- › Wall unit with innovative door runner system.
- Extreme strength and durability, stress-tested with 100,000 cycles.

Wall cabinet

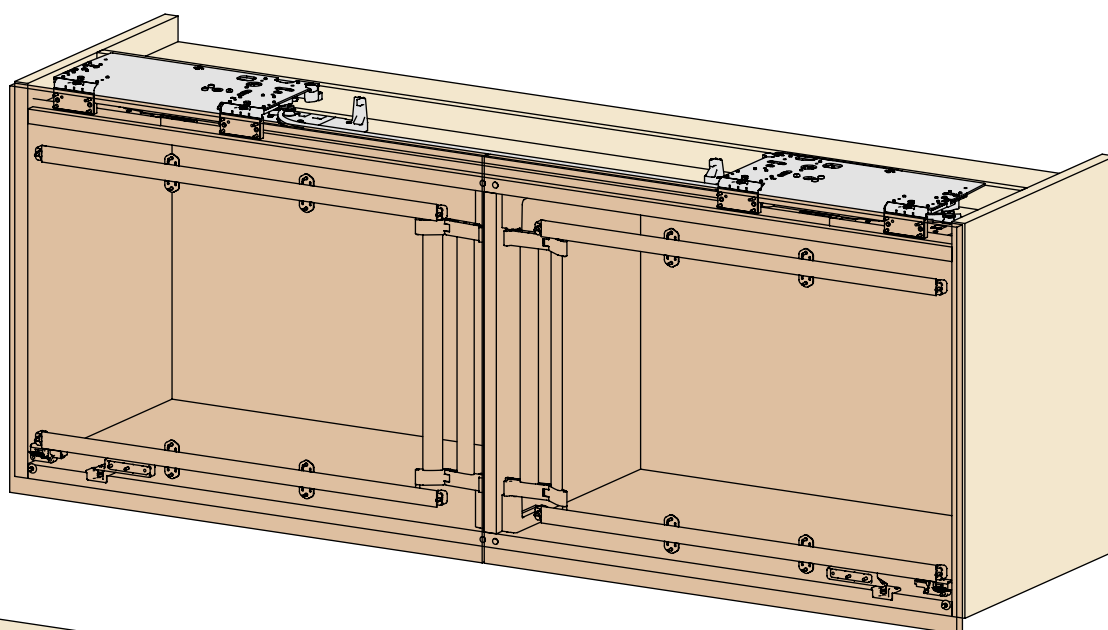


Kitchen cabinet


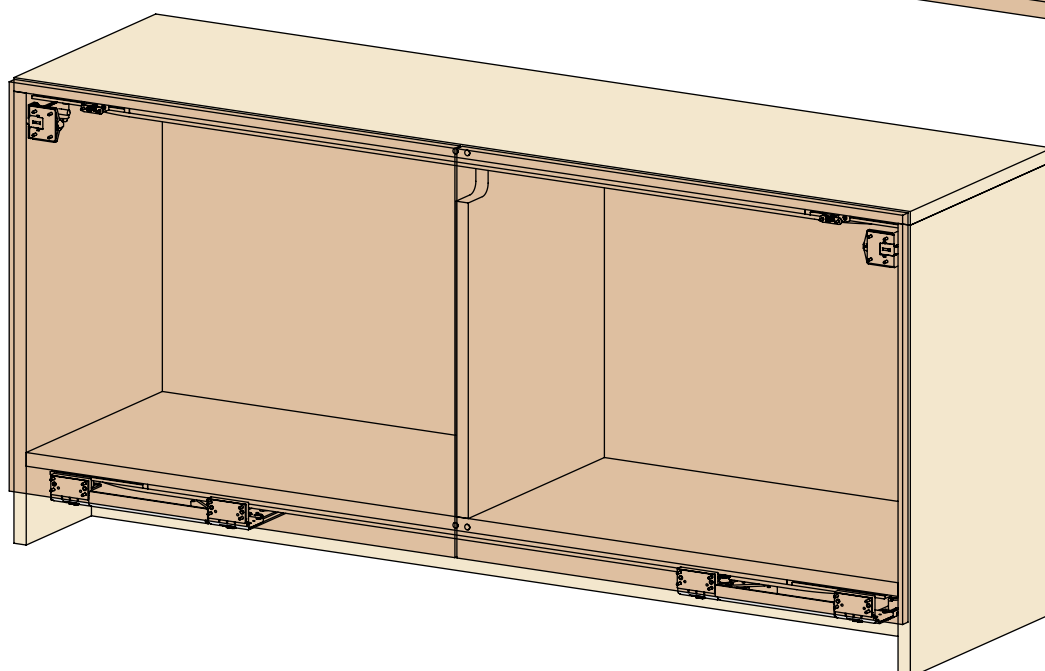


Slider S10 - Types of assembly


Wall cabinet

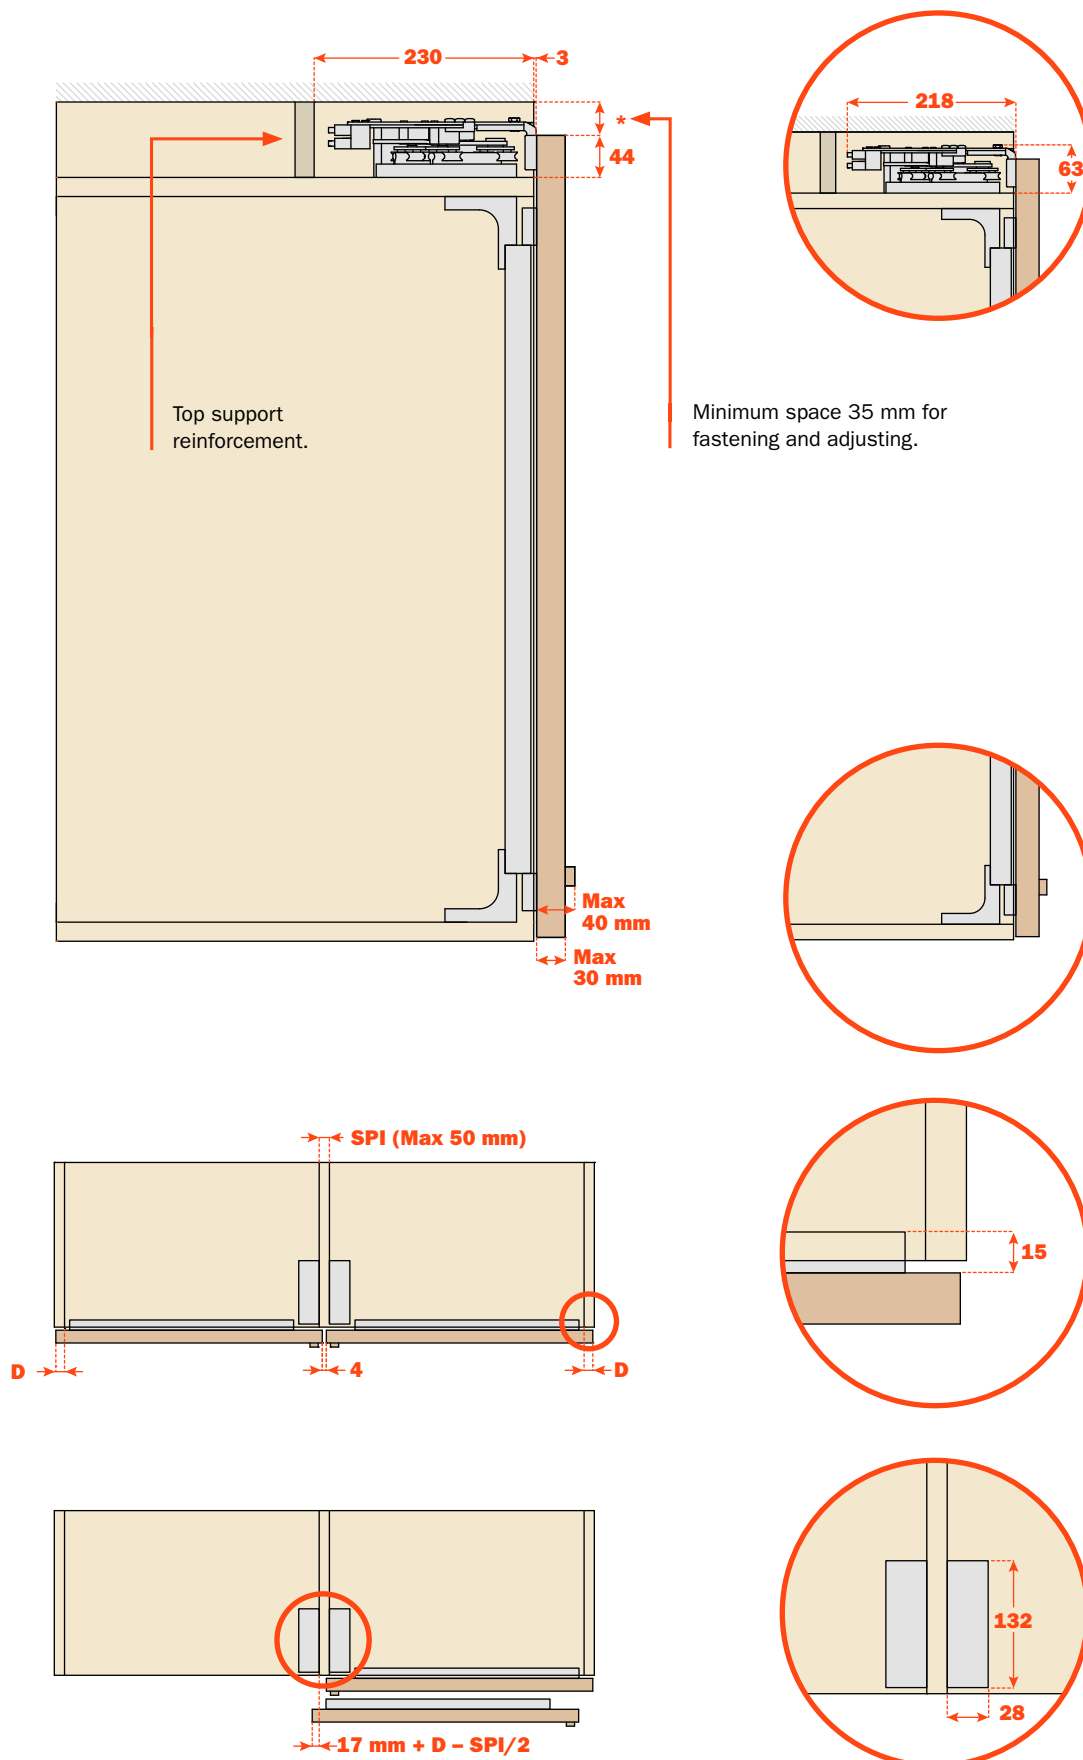


Kitchen cabinet

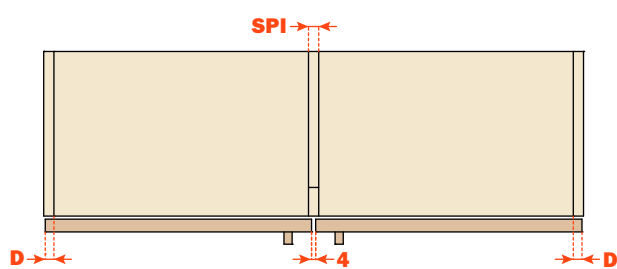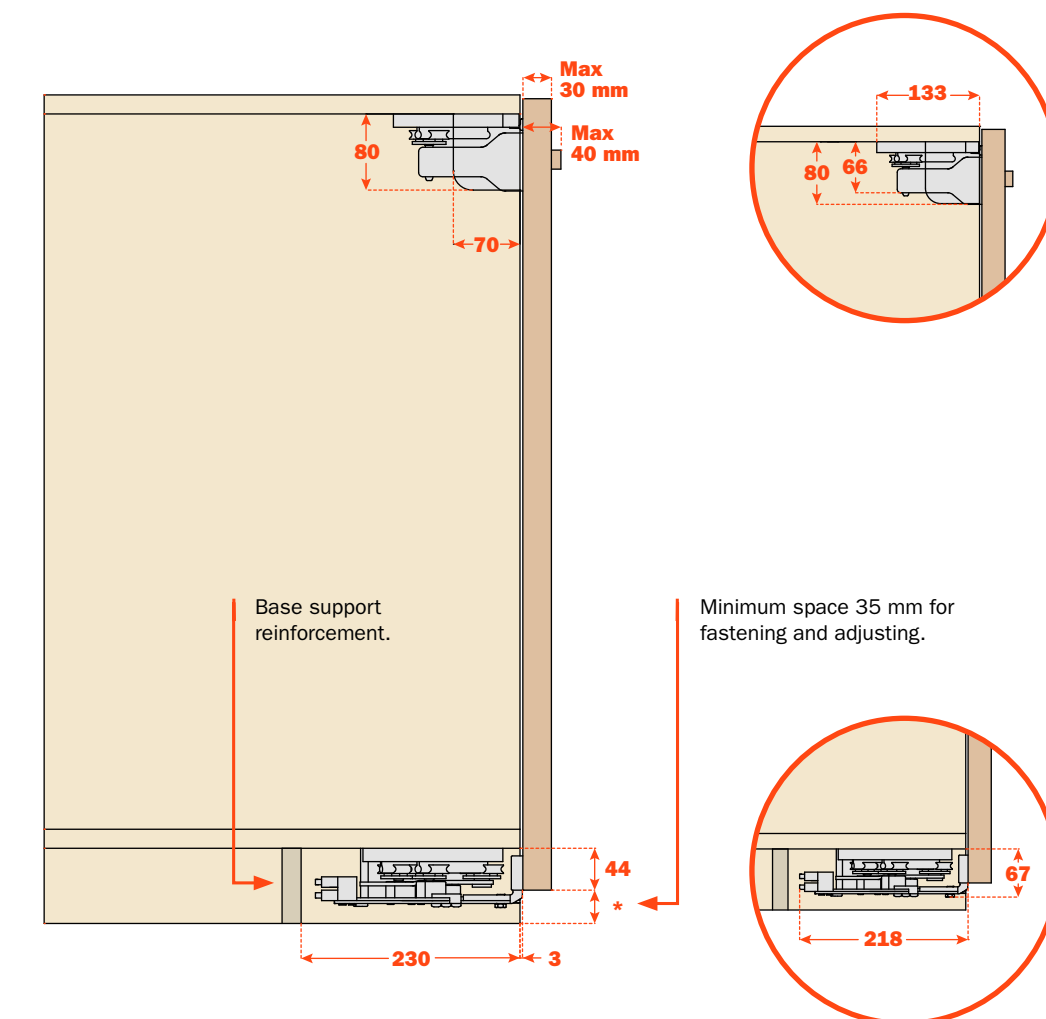

Single-piece sliding track.

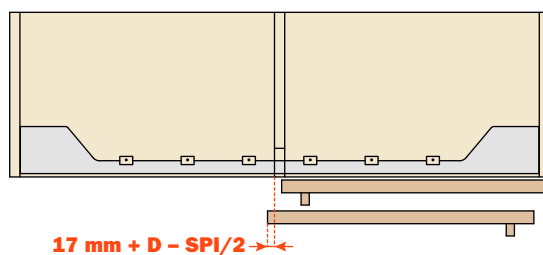


Two-piece sliding track (Only for custom orders).

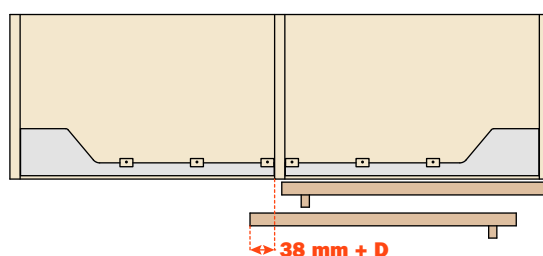


Slider S10 - How to order



Slider S10 is a flexible system that can be adapted to the internal width of the unit (**LI**) with a minimum of 860 mm to a maximum of 2400 mm.

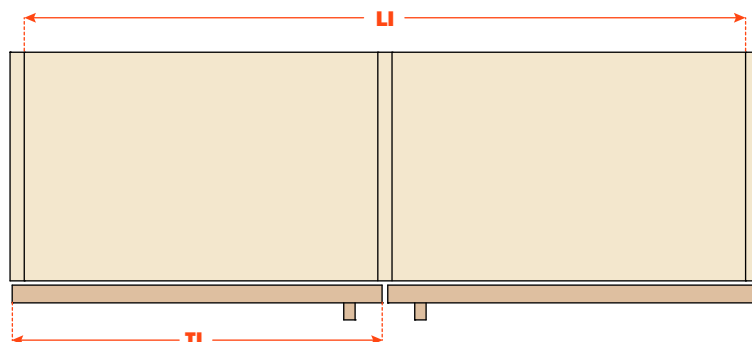


The handle must be positioned at a minimum of 10 mm from the edge of the door (at the centre of the unit) and a maximum of one third of its width (**TL**).

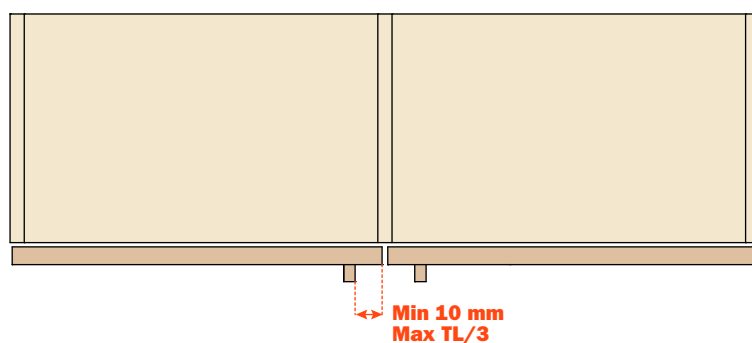

The maximum permitted superimposition (**D**) is 25 mm.

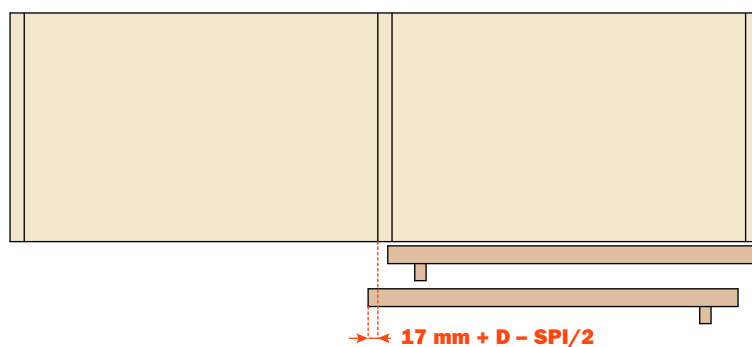


The cabinet has to be constructed so that the bottom panel of the kitchen cabinet, or the top panel of the wall cabinet is sufficiently rigid to prevent it from bending. For this reason, some reinforcement is always recommended **1**.

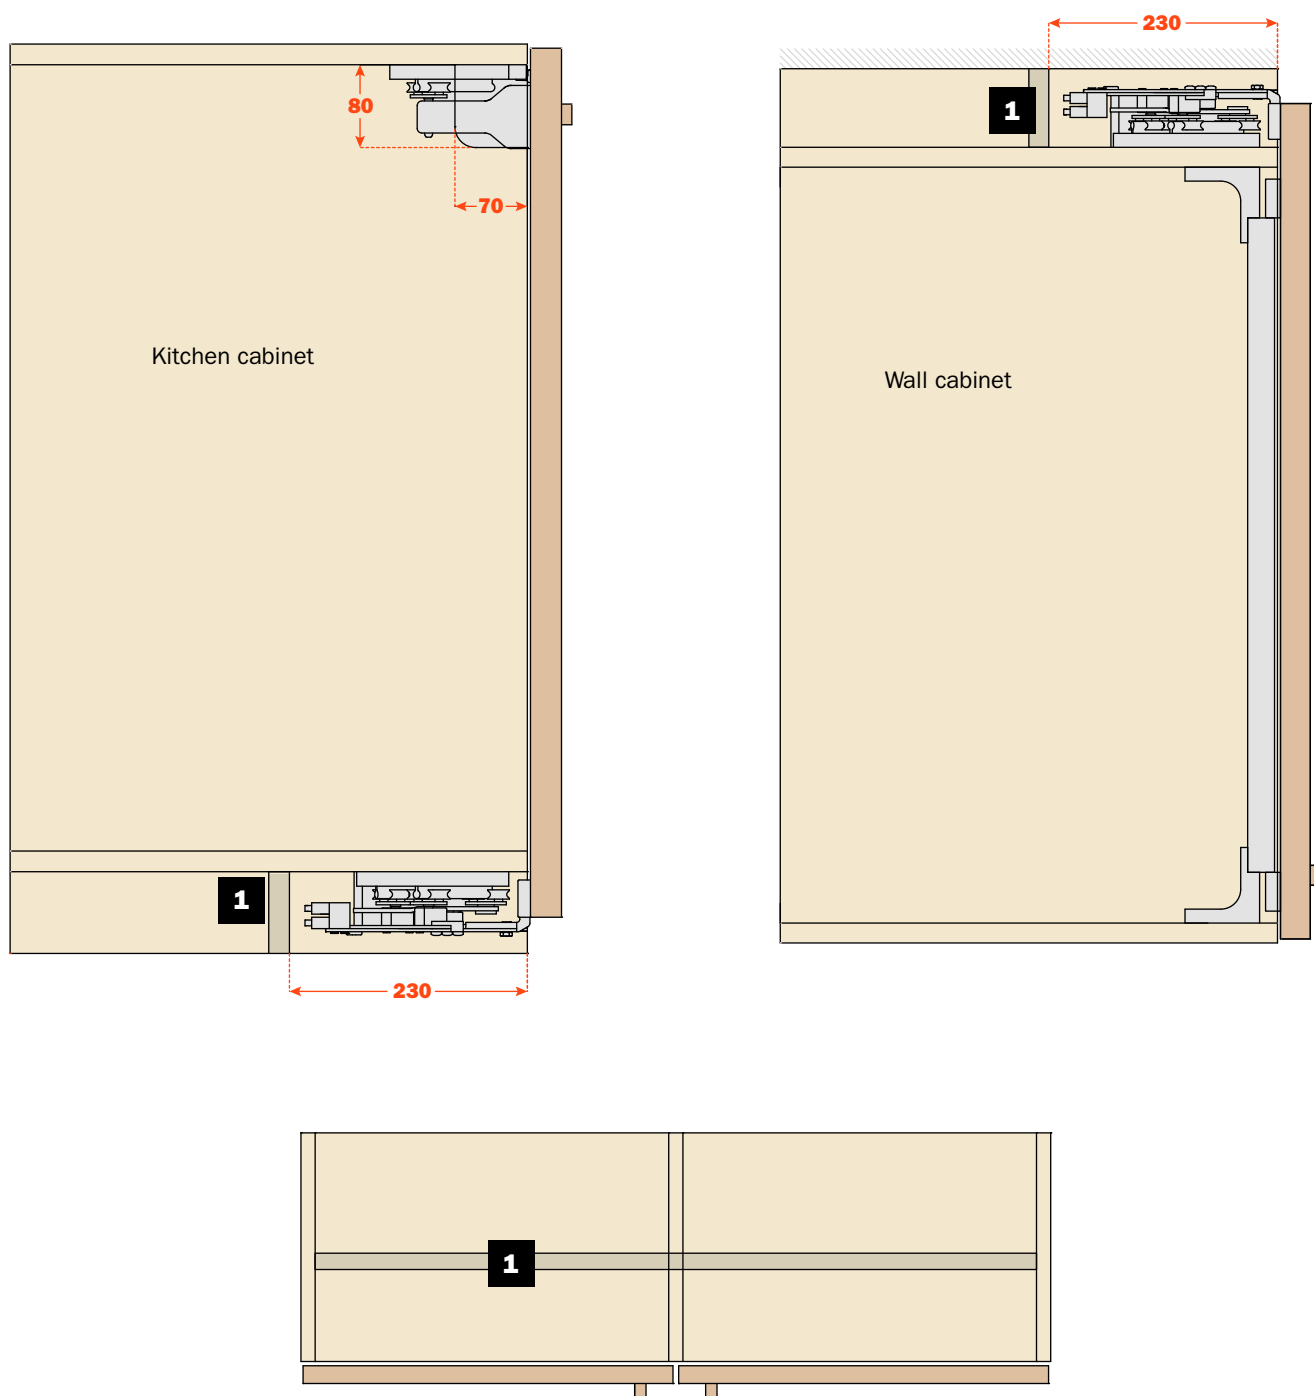

Slider S10 - How to order

Standard

A solution for a whole range of applications that requires the customer to measure and cut aluminium and PVC profiles and to assemble the mechanism. Depending on the internal width of the unit (**LI**), the mechanism is put together using a carriage kit **1** and a profile kit and accessories **2** for kitchen cabinet **M** or wall cabinet **P**.

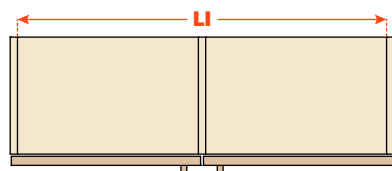

			LI (mm)						
			860÷987	988÷1115	1116÷1371	1372÷1627	1628÷1883	1884÷2139	2140÷2400
M P	1	VE57KIT0101	M - P						
		VE57KIT0102		M - P					
		VE57KIT0103			M - P				
		VE57KIT0104				M - P			
		VE57KIT0105					M - P		
		VE57KIT0106						M - P	
		VE57KIT0107							M - P
M	2	VE57KIT0201	M	M	M	M			
		VE57KIT0202					M	M	M
P	2	VE57KIT0301	P	P	P	P			
		VE57KIT0302					P	P	P

Standard

	Weight (kg)	Volume (m³)	Dimensions (cm)
VE57KIT0101	6,05	0,0212	470 x 300 x 150
VE57KIT0102	6,40	0,0225	500 x 300 x 150
VE57KIT0103	6,74	0,0240	535 x 300 x 150
VE57KIT0104	7,43	0,0270	600 x 300 x 150
VE57KIT0105	8,12	0,0297	660 x 300 x 150
VE57KIT0106	8,81	0,0326	725 x 300 x 150
VE57KIT0107	9,50	0,0355	790 x 300 x 150
VE57KIT0201	3,80	0,0252	1750 x 160 x 90
VE57KIT0202	4,30	0,036	2500 x 160 x 90
VE57KIT0301	4,80	0,0252	1750 x 160 x 90
VE57KIT0302	5,30	0,036	2500 x 160 x 90

Customised systems

For made to measure orders of 10 pieces or more, the mechanism can be supplied cut and assembled with either a two-piece sliding track or a single-piece sliding track.



Slider S20

Slider S20



S20 is a coplanar system for kitchen cabinets and wall cabinets with doors weighing up to 20 kg. Thanks to the exclusive patented design of the Slider series, door movement and cushioned opening and closing are intuitive, smooth and silent. For some applications, **S20** can be provided with a customisable front cover and the Push system. The latter allows you to open the unit by simply pressing the door: this eliminates the handle leaving you greater design freedom.

Due to its features, **S20** is ideal for cabinets used in the living area, offices, kitchen and sleeping area.



Slider S20



Technical information


Coplanar two-door cushioned sliding system.
Capacity 20 kg per door.

Individual door properties:


- max. weight per door 20 kg (evenly distributed)
- width:- min. 600 mm
- max. 1500 mm
- height:- max. 1200 mm
- thickness:- min. 18 mm
- max. with handle 45 mm
- material:a) wood or derived material
b) glass with metal frame

Door adjustment: • vertical adjustment ± 4.5 mm
• horizontal adjustment ± 3 mm


Door front adjustment: • wall cabinet ± 4 mm
• kitchen cabinet ± 2 mm

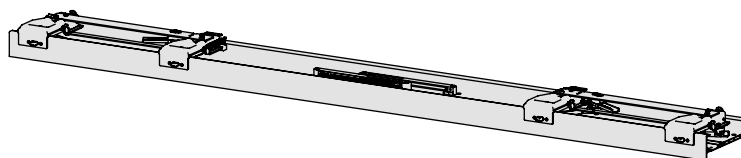

Wall cabinet

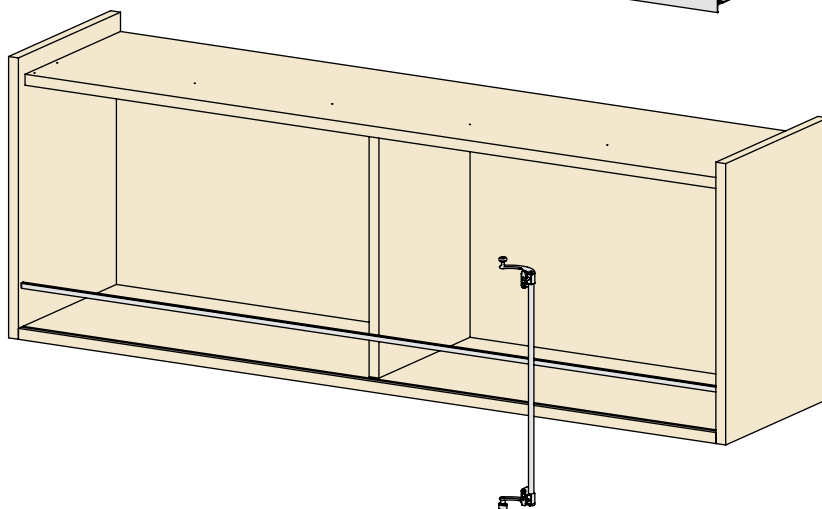


Kitchen cabinet

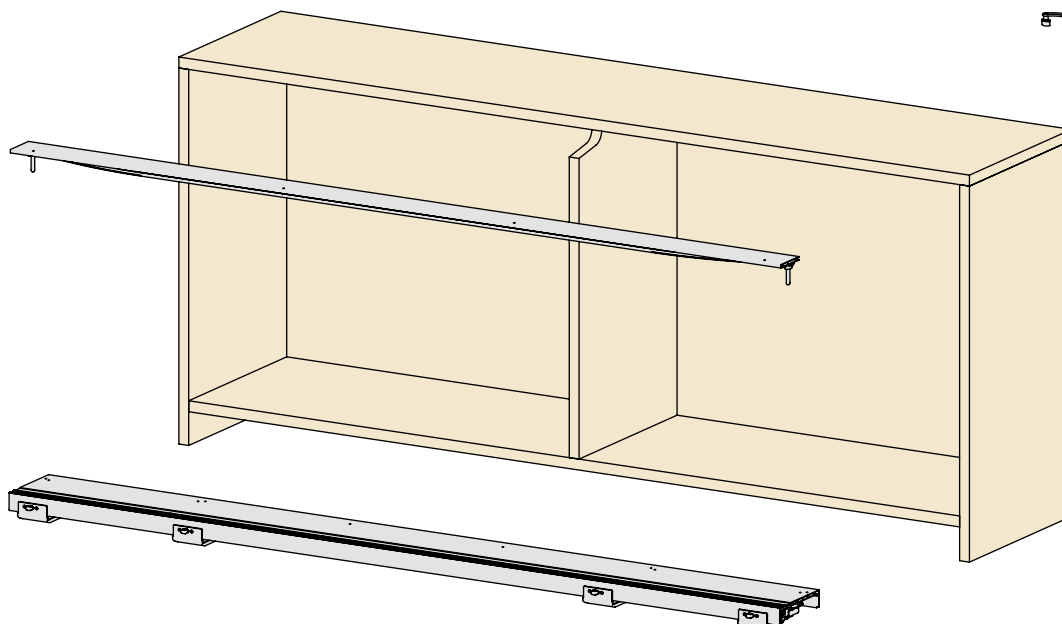


Key feature

- Aluminium and PVC guide tracks for smooth, silent movement.
- Curves designed to fit the unit size.
- Pre-assembled mechanism for fast, safe assembly.
- Cushioned for opening and closing.
- Push opening mechanism (kitchen cabinets).
- Extremely tough and long-lasting, subjected to 100,000 cycles of the stress test.

Wall cabinet

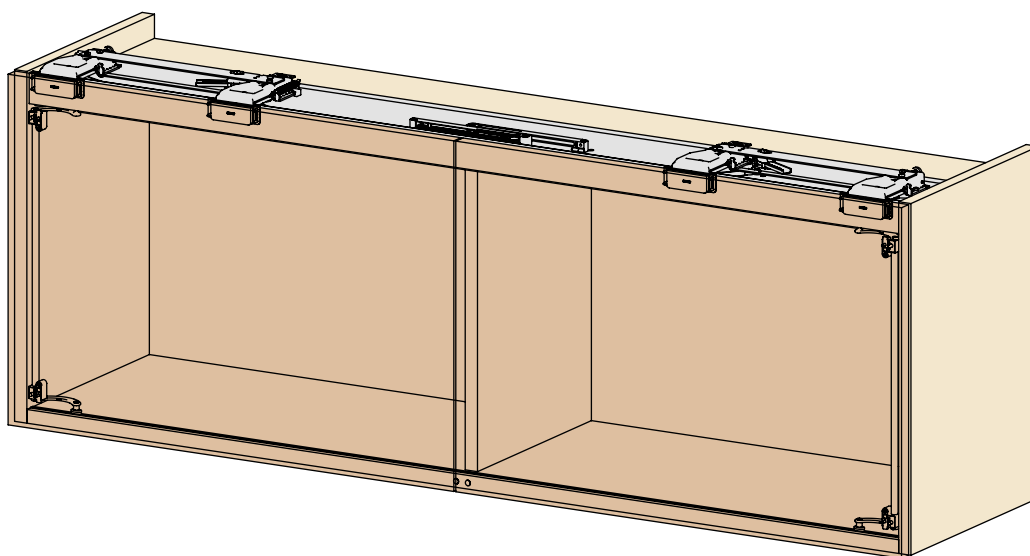


Kitchen cabinet

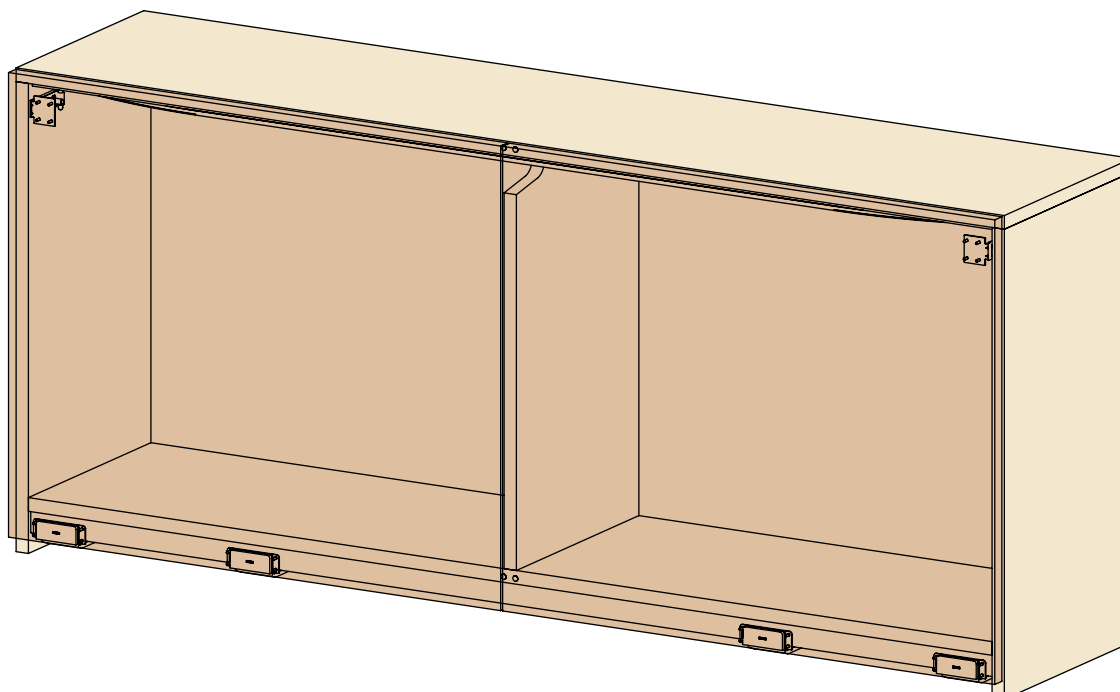


Slider S20 - Types of assembly

Wall cabinet

Type 1

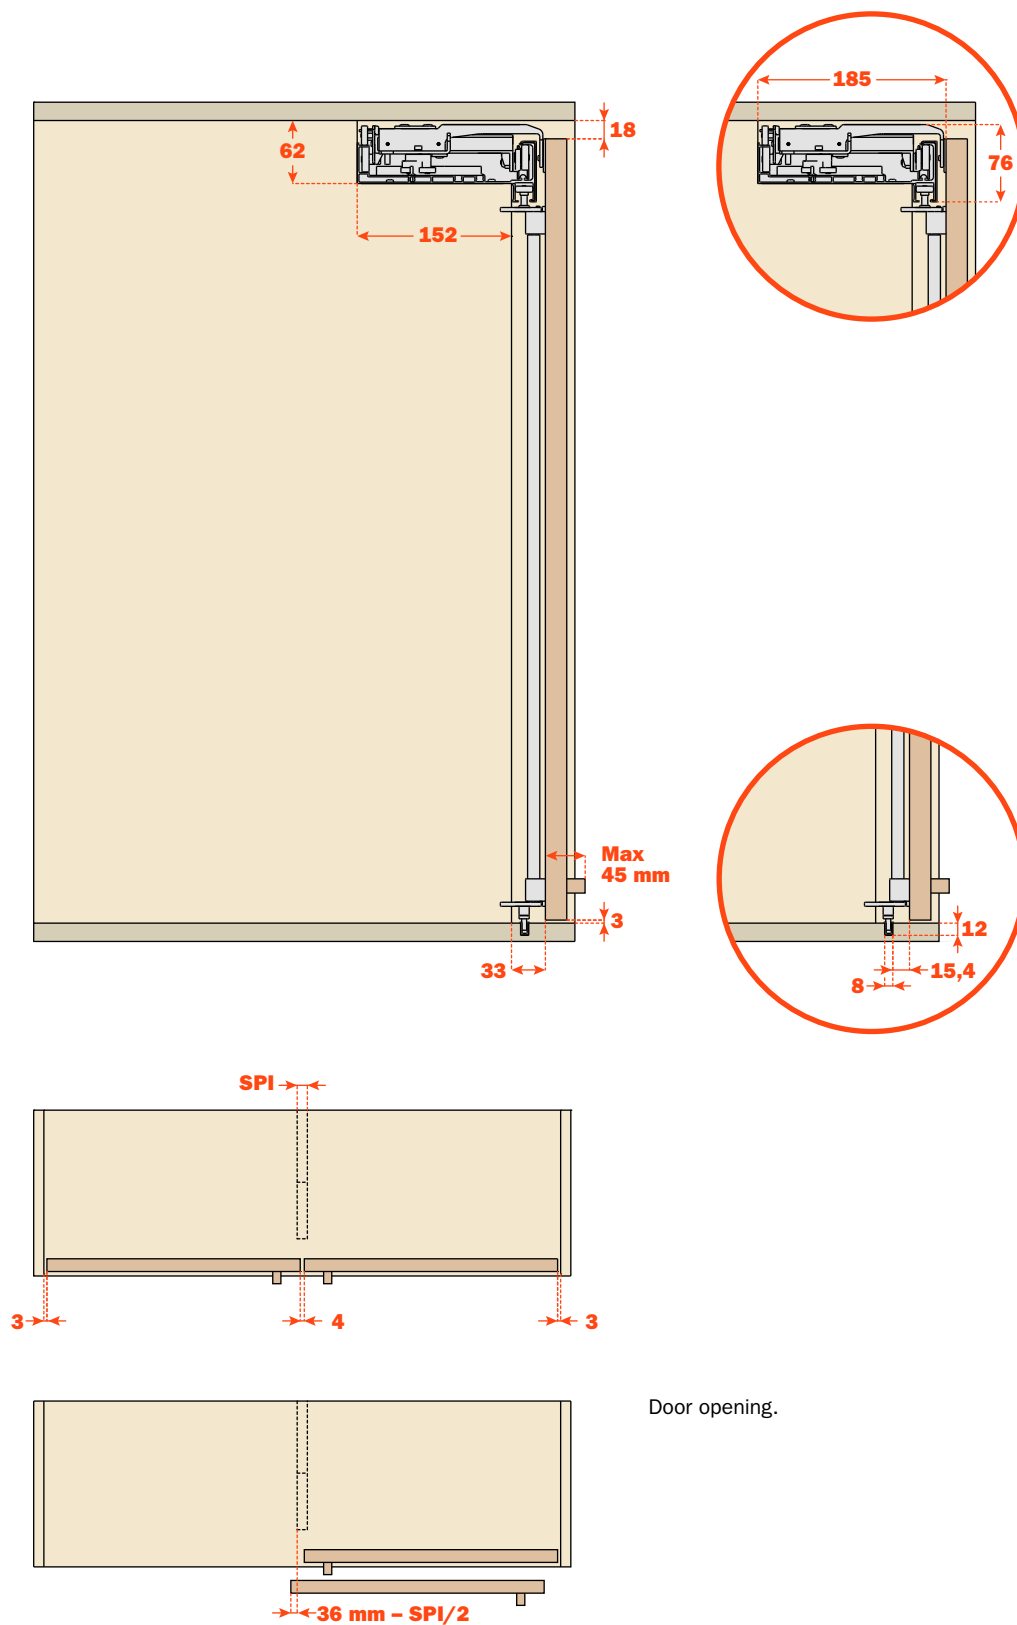


Wall cabinet Type 2

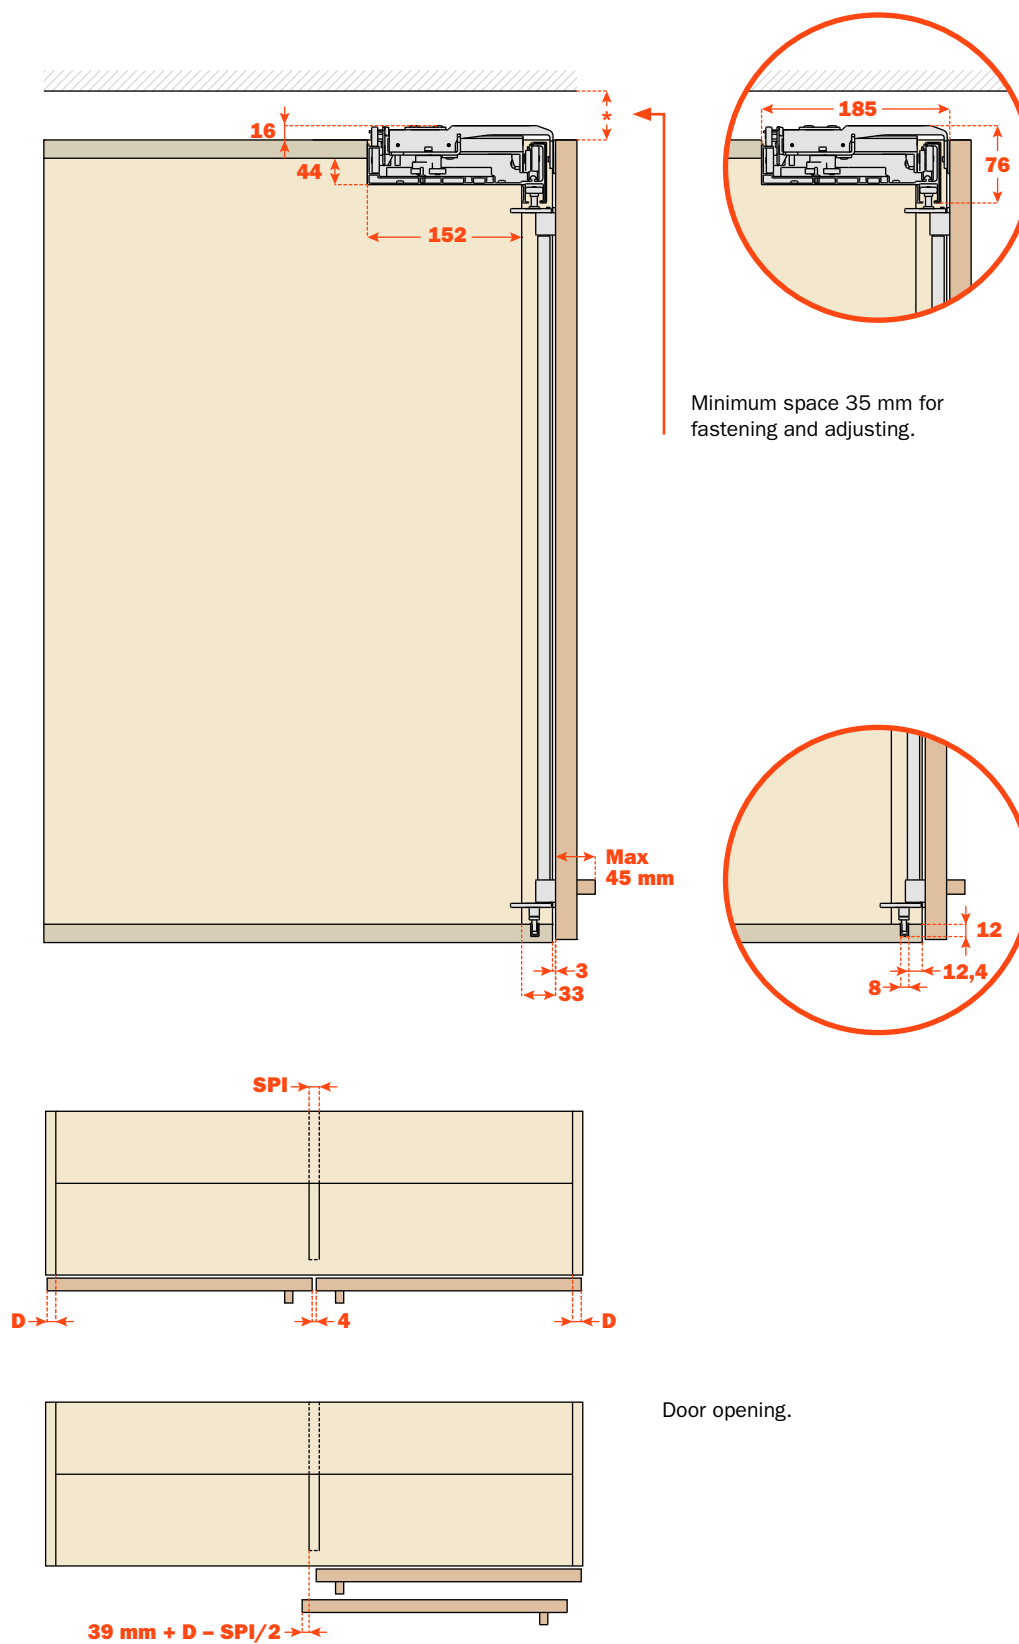

Slider S20 - Types of assembly

Wall cabinet


Type 3

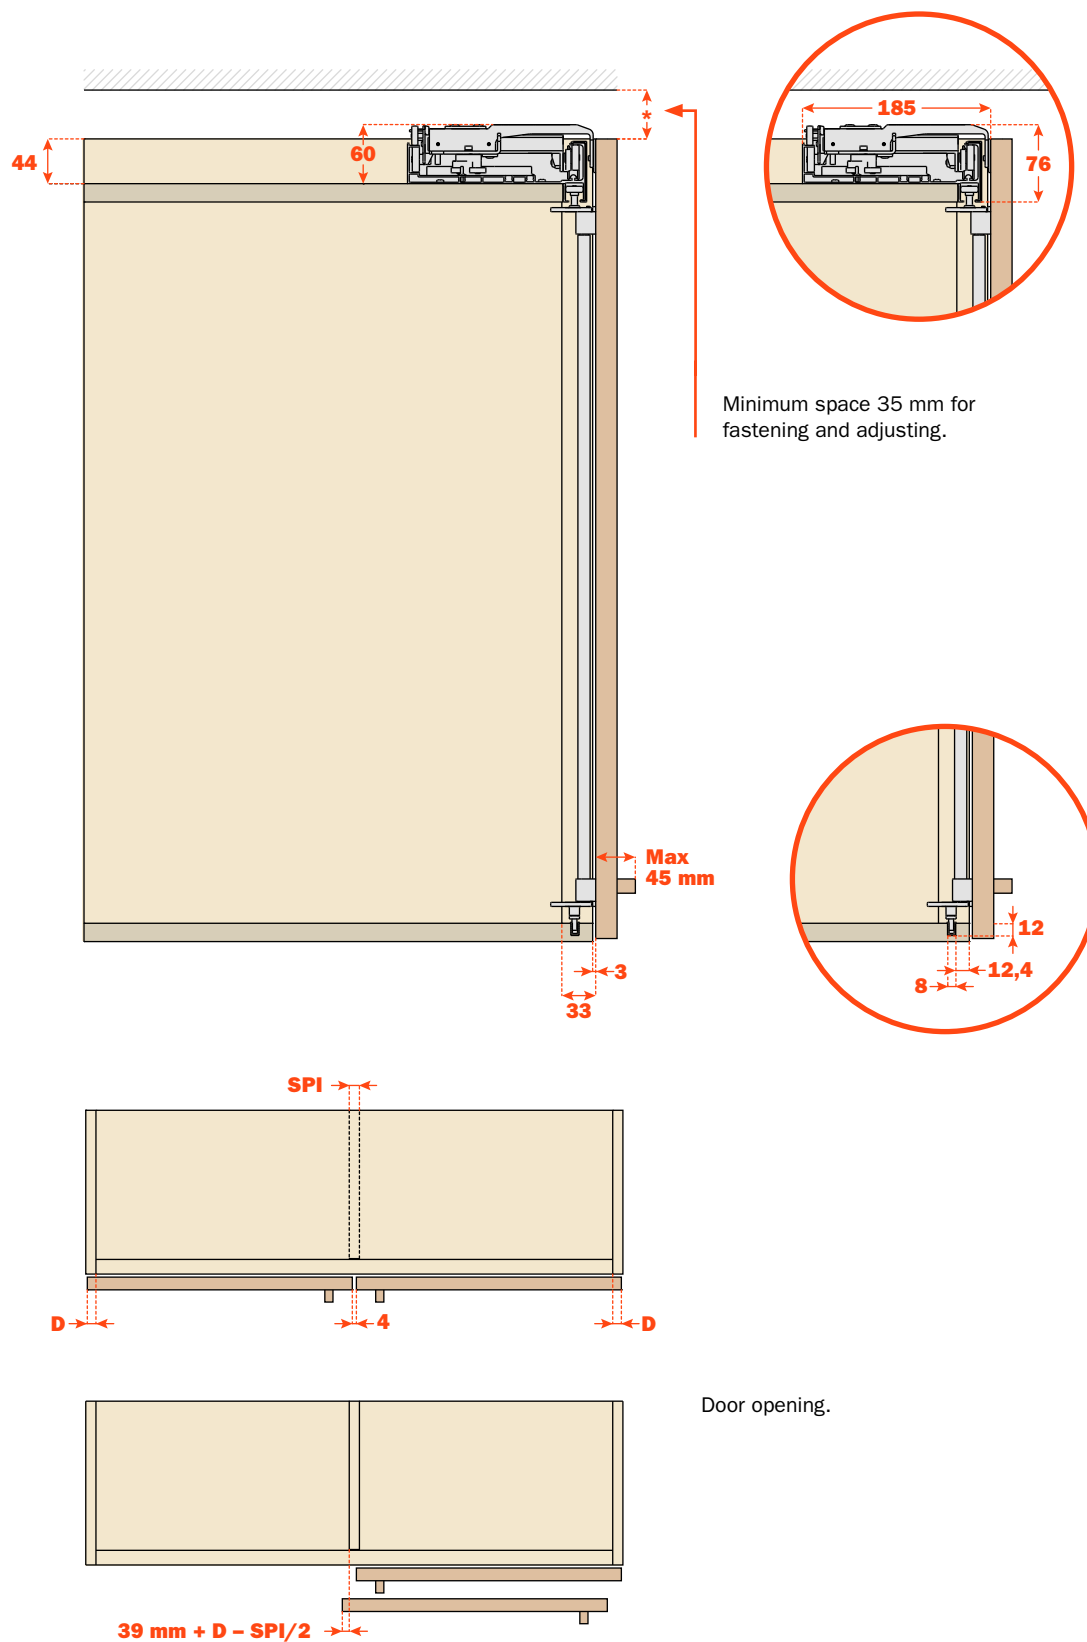

How to order

Wall cabinet




The S20 sliders can be customised, i.e., designed for installation on cabinets with internal width (**LI**) equal to the length of the slider rail (**CP**).

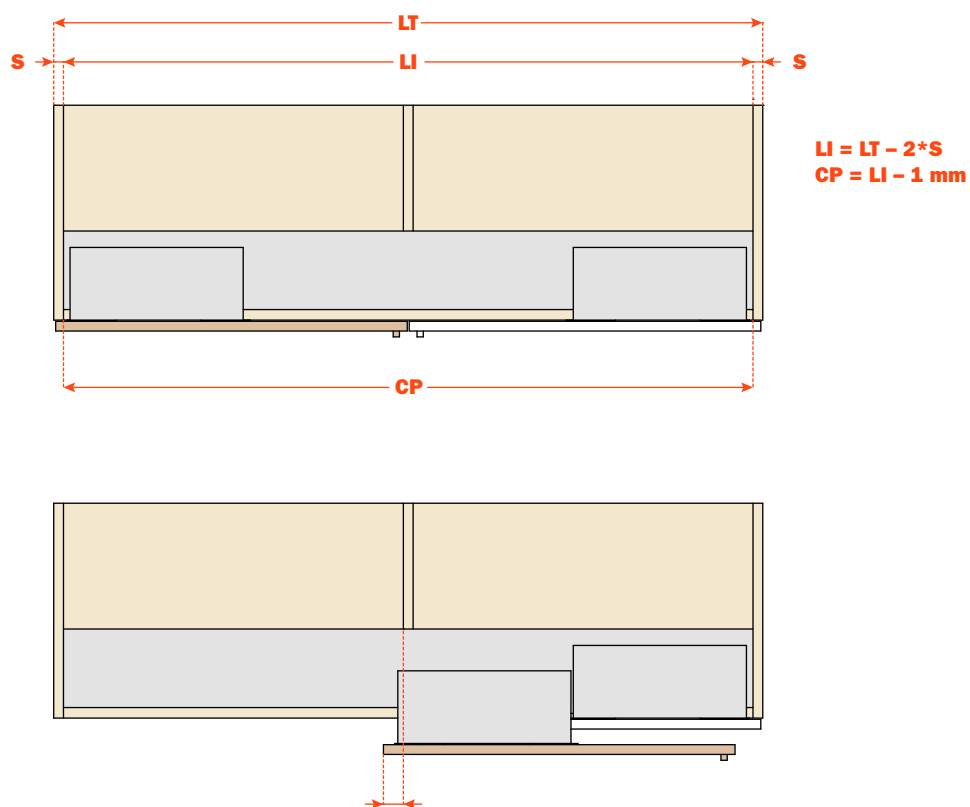


Slider S20 - Types of assembly

Kitchen cabinet

Type 4

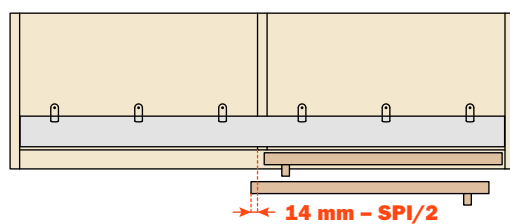
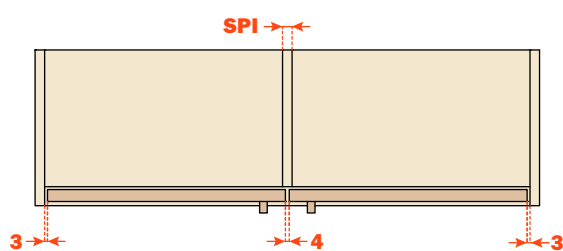
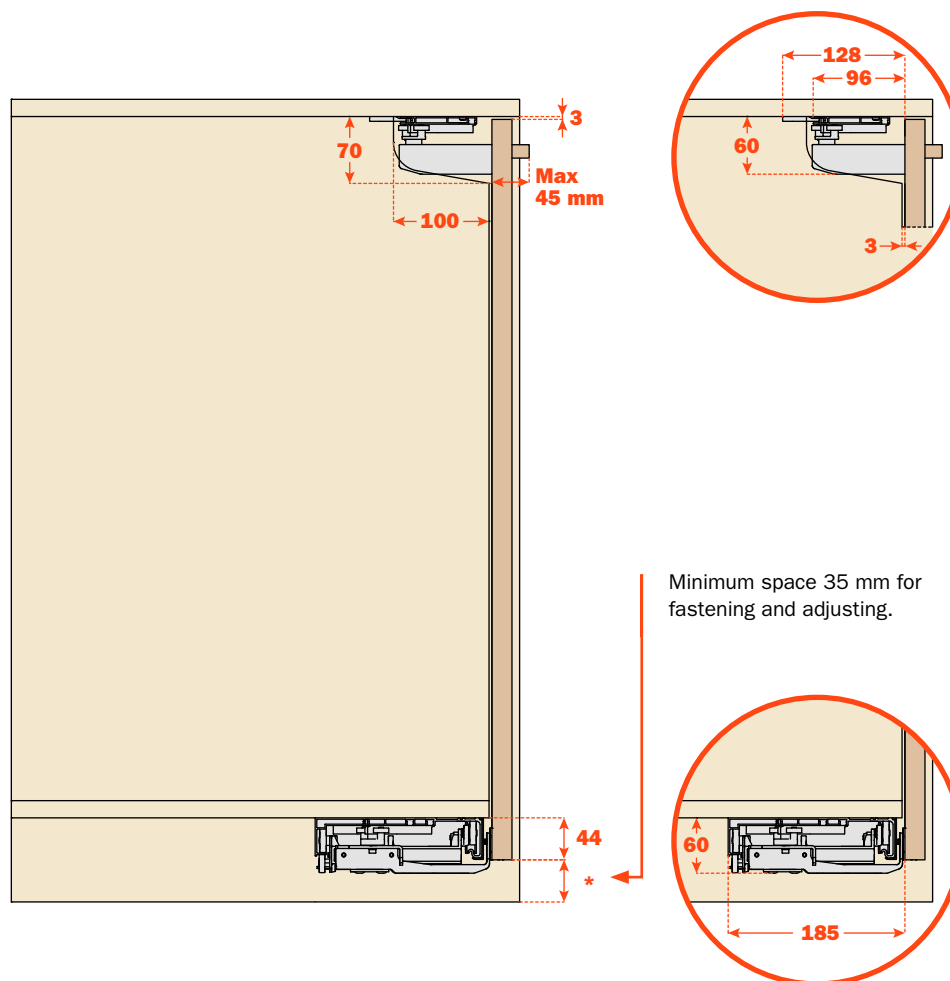


With one-piece upper runner: door opening.

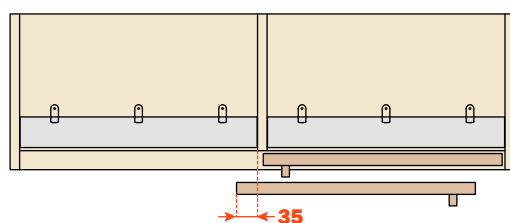


With two-pieces upper runner.

Kitchen cabinet Type 5

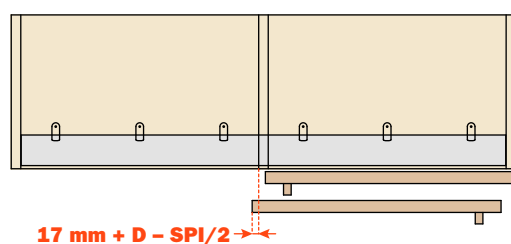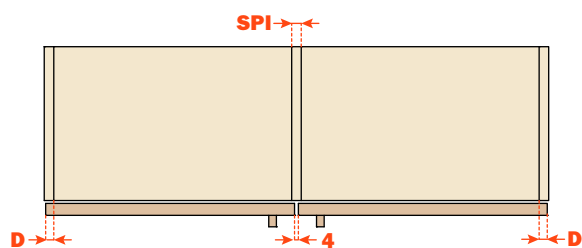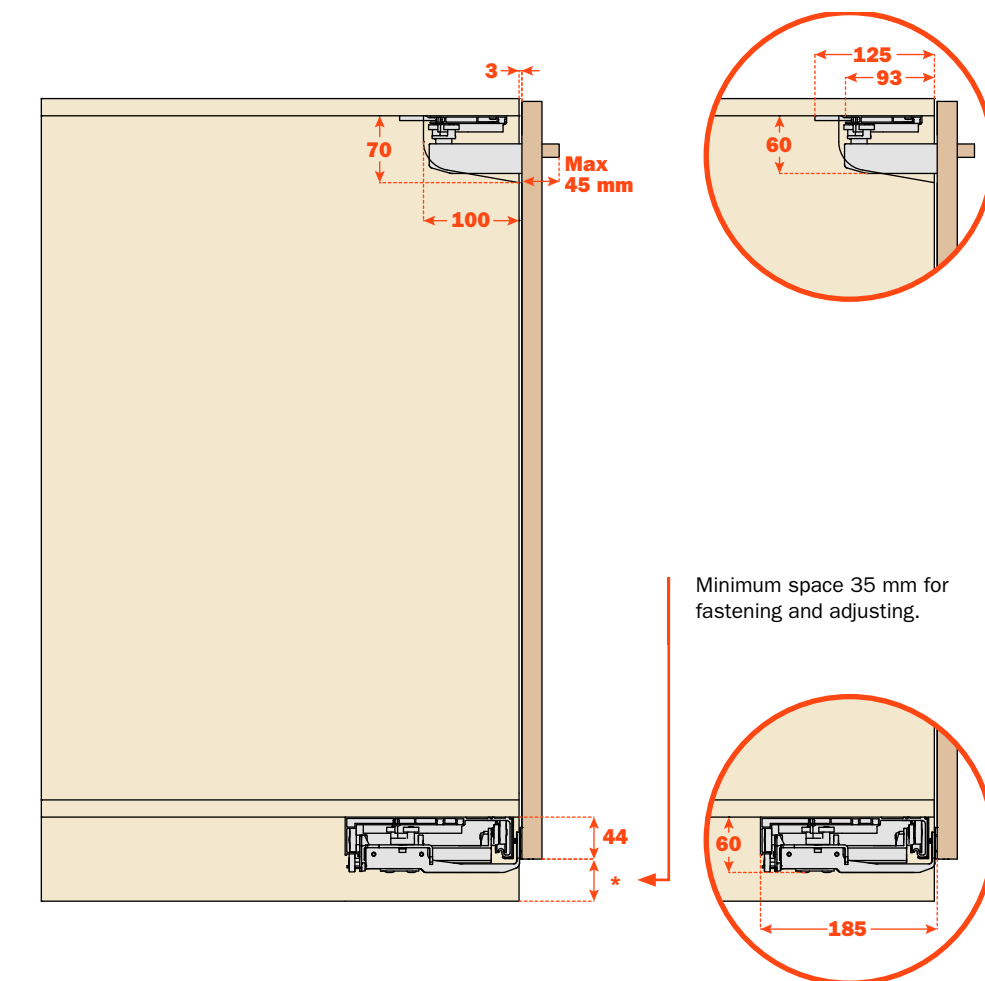

With one-piece upper runner: door opening.



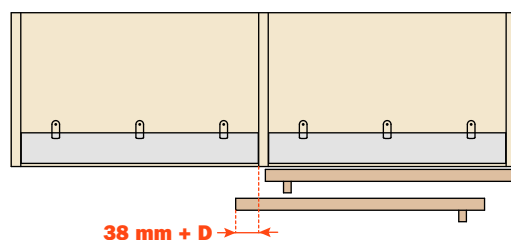


With two-pieces upper runner.


Slider S20 - Types of assembly

Kitchen cabinet

Type 6

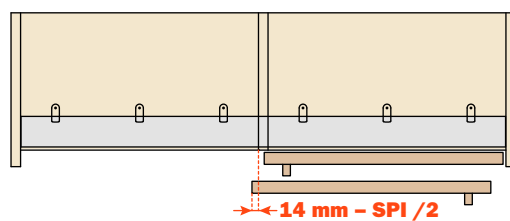
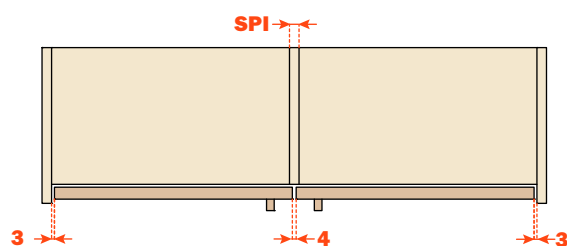
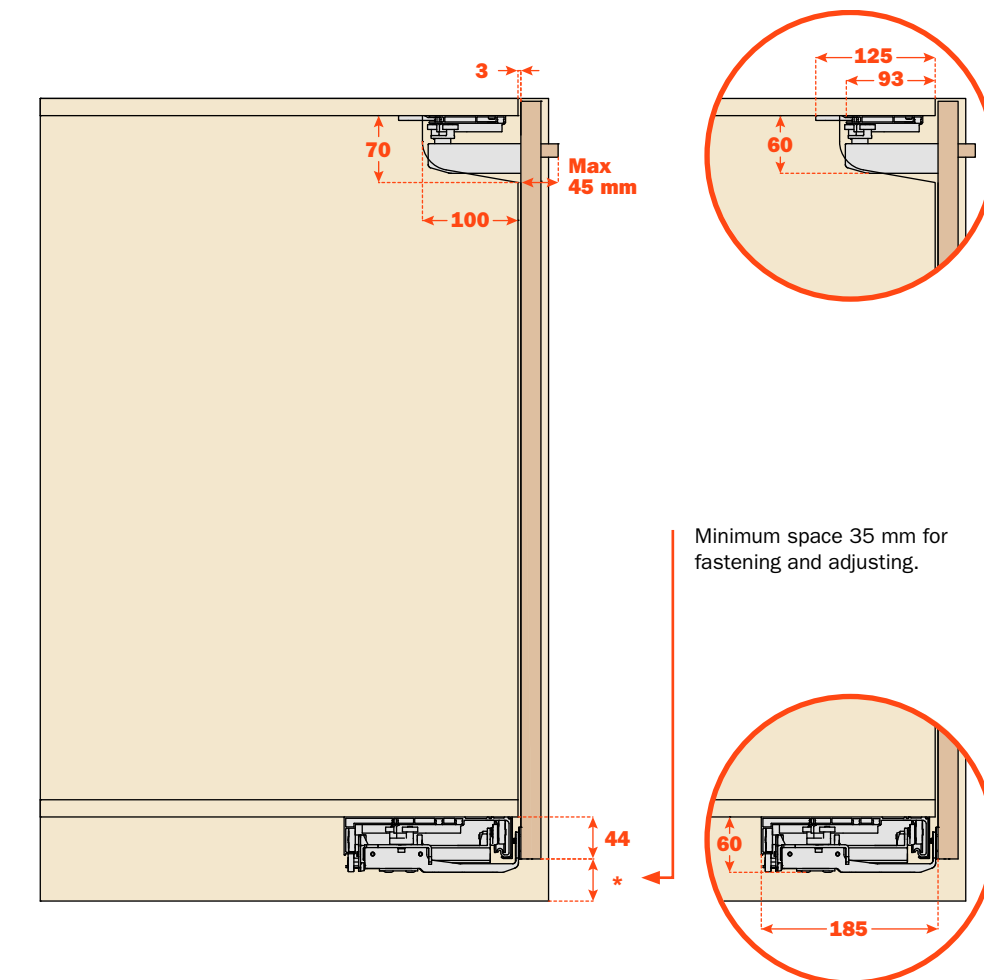


With one-piece upper runner: door opening.

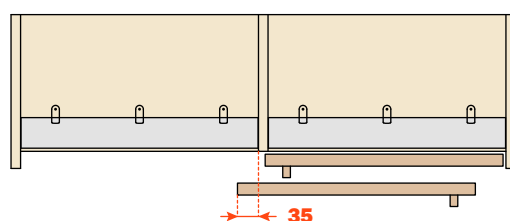


With two-pieces upper runner.

Kitchen cabinet Type 7

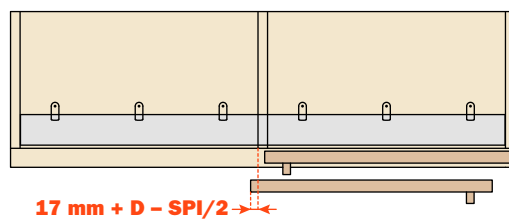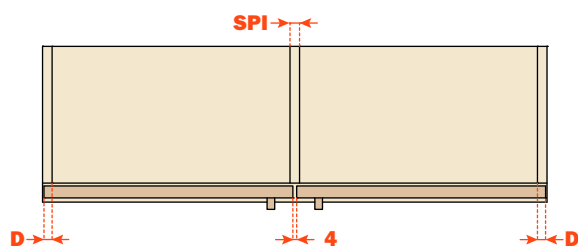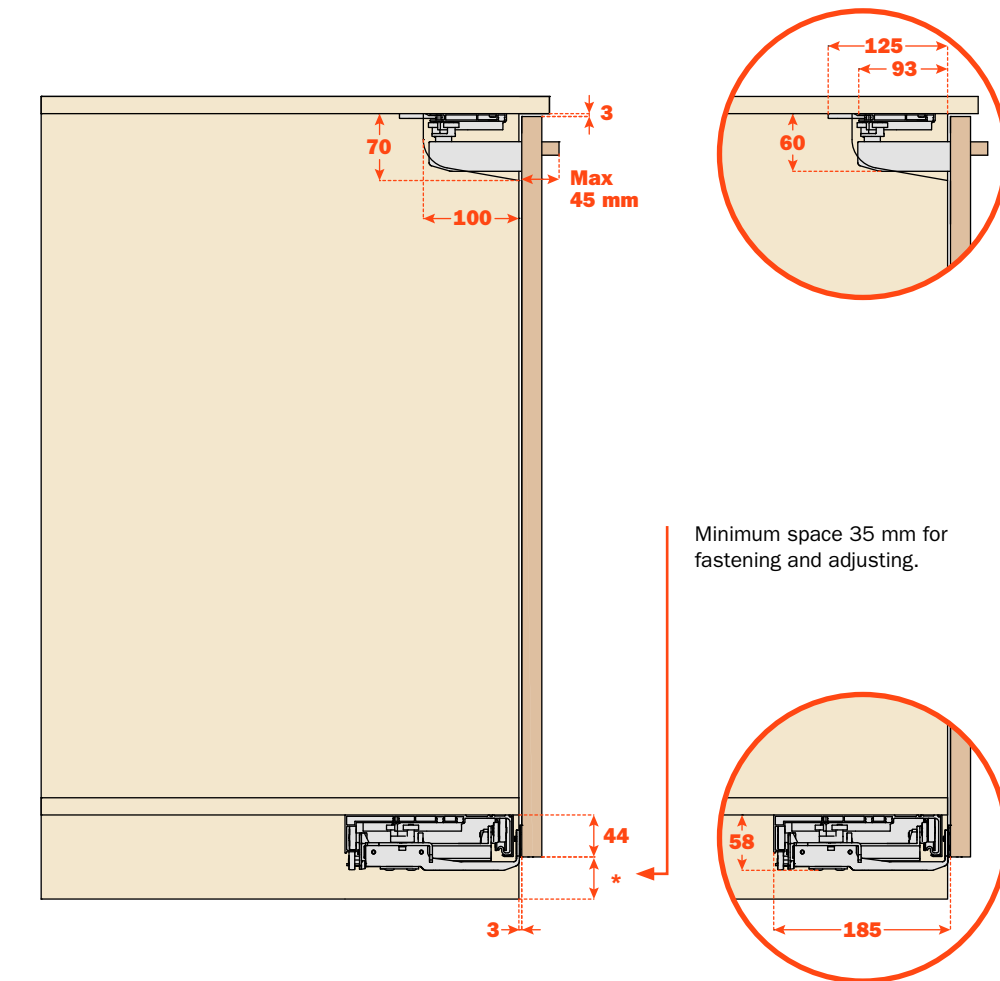

With one-piece upper runner: door opening.

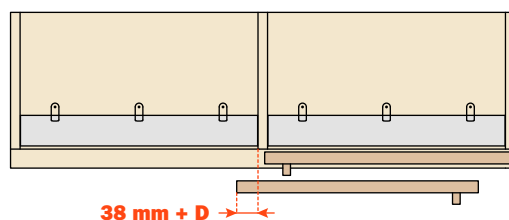


With two-pieces upper runner.

Slider S20 - How to order

Kitchen cabinet




The S20 sliders can be customised, i.e., designed for installation on cabinets with internal width (**LI**) equal to the length of the slider rail (**CP**).

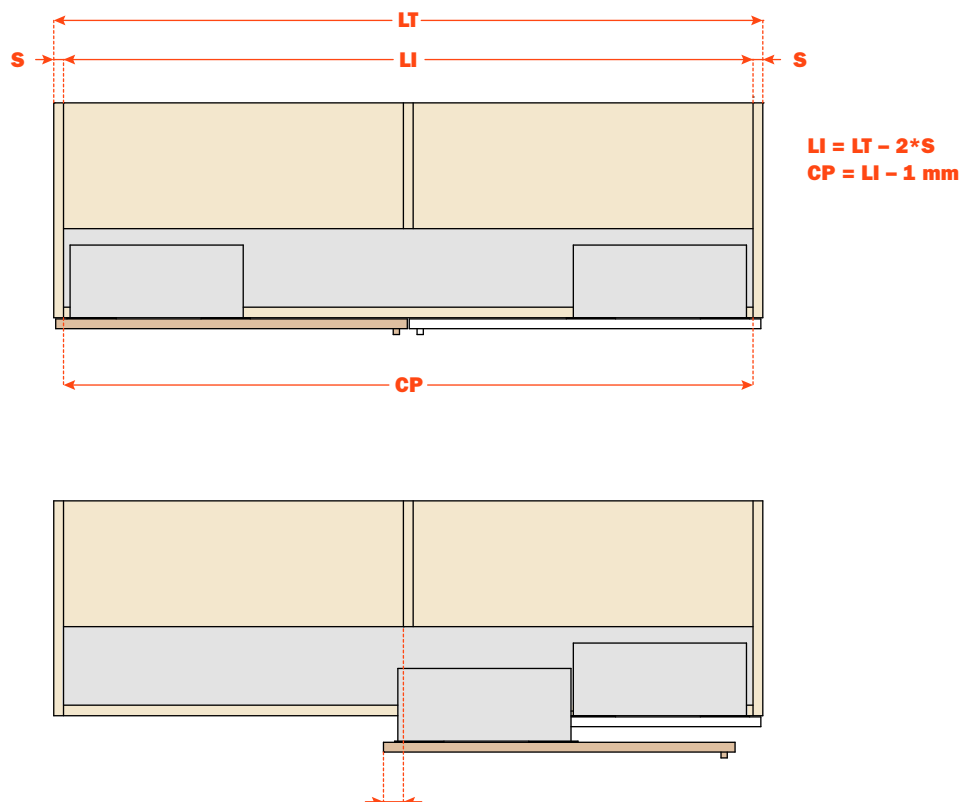


Slider S20 PUSH - Types of assembly

Kitchen cabinet



Type 1

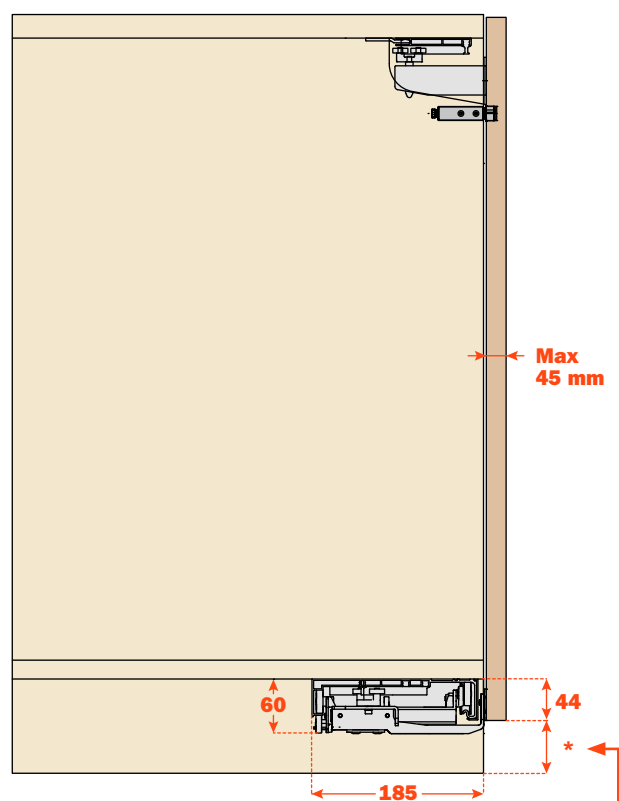

Minimum space 35 mm for fastening and adjusting.

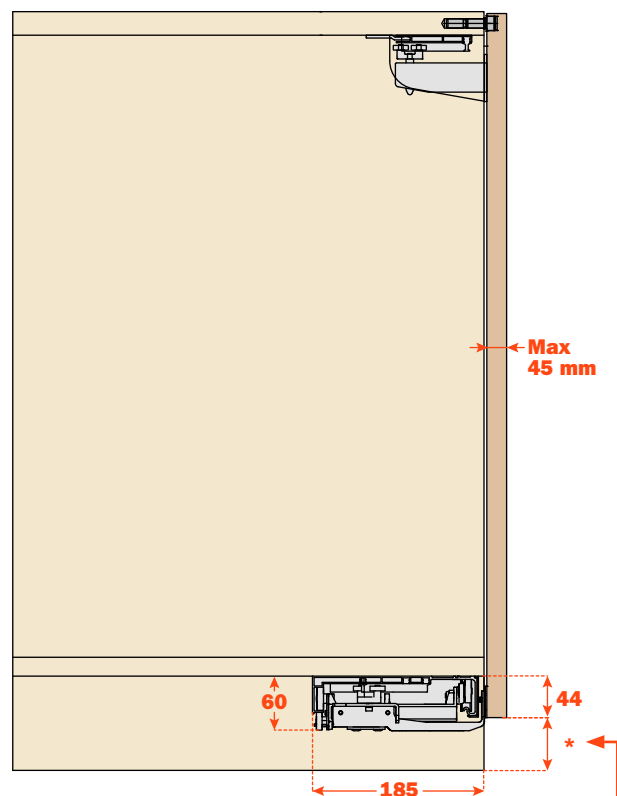


Minimum space 35 mm for fastening and adjusting.

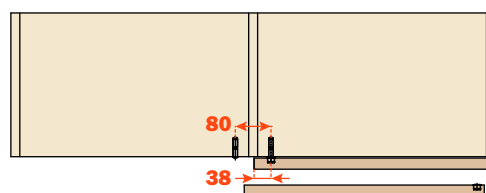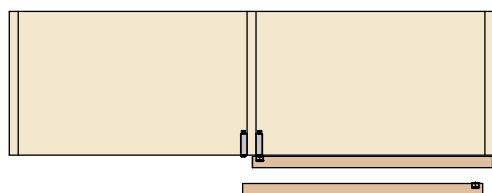

Slider S20 PUSH - How to order






Kitchen cabinet

The S20 PUSH sliders can be customised, i.e., designed for installation on cabinets with internal width (**LI**) equal to the length of the slider rail (**CP**). Salice push mechanism included.

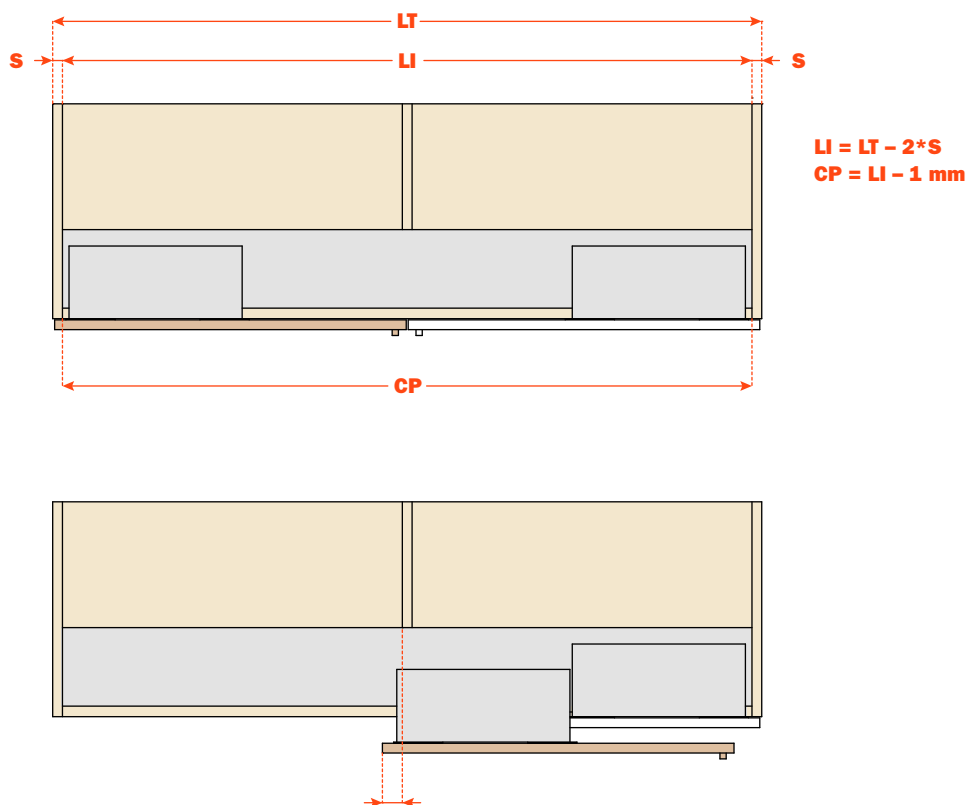

PUSH version available only for kitchen cabinets (Type **4-5-6-7**).

Available versions

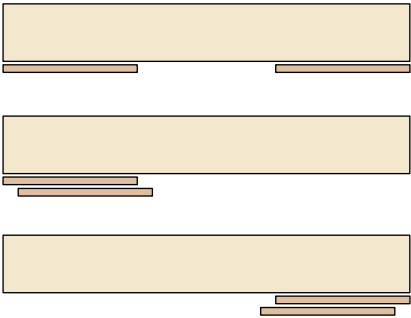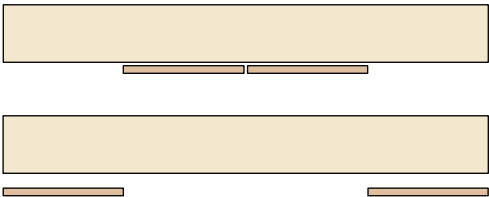Standard		Slider S10 Slider S20	 Slider S20
One		Slider S10 Slider S20	 Slider S20
One		Slider S10 Slider S20	 Slider S20
Step		Slider S20	 Slider S20
Reverso		Slider S20	 Slider S20

Notes

This image shows a full page of blank, lined paper. It features approximately 28 horizontal blue or grey lines spaced evenly apart, typical of notebook paper. The lines extend across the entire width of the page, leaving small margins at the top and bottom. There are no vertical lines, text, or other markings on the page.

Notes

This image shows a full page of blank white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page, providing a template for writing or drawing. There are no margins, text, or other markings present.

HEADQUARTERS AND PRODUCTION UNITS

ARTURO SALICE S.p.A.

HEAD OFFICE

VIA PROVINCIALE NOVEDRATESE, 10
22060 NOVEDRATE (COMO) ITALIA
TEL. 031 790424 - FAX 031 791508
info.salice@salice.com
www.salice.com

ARTURO SALICE S.p.A.

VIA ARISTIDE MERLONI, 11
61036 COLLI AL METAURO (PU) ITALIA
TEL. 0721 899800
FAX 0721 897980
info.salice@salice.com
www.salice.com

BORTOLUZZI SISTEMI S.p.A.

VIA CADUTI 14 SETTEMBRE 1944, 45
32100 BELLUNO (BL) ITALIA
TEL. 0437 930866
FAX 0437 931442
info@bortoluzzi.com
www.salice.com

NUOVA ATIM S.r.l.

VIA IV NOVEMBRE, 52
20019 SETTIMO MILANESE (MI) ITALIA
TEL. 02 33503203
FAX 02 33516514
info@atimspa.com
www.atimspa.com

BRANCHES

DEUTSCHE SALICE GMBH

RUDOLF DIESEL STR. 10
74382 NECKARWESTHEIM
TEL. 07133 9807-0
FAX. 07133 9807-16
info.salice@deutschesalice.de
www.salice.com

DEUTSCHE SALICE GMBH

VERKAUFSBÜRO NORD
RINGSTRASSE 36/A30 CENTER
32584 LÖHNE
TEL. 05731 15608-0
FAX. 05731 15608-10
vknord@deutschesalice.de
www.salice.com

SALICE UK LTD.

KINGFISHER WAY
HINCHINGBROOKE BUSINESS PARK
HUNTINGDON CAMBS PE 29 6FN
TEL. 01480 413831
FAX. 01480 451489
info.salice@saliceuk.co.uk
www.salice.com

SALICE FRANCE S.A.R.L.

285 RUE DE GOA ZAC LES 3 MOULINS
06600 ANTIBES
TEL. 0493 330069
FAX. 0493 330141
info.salice@salicefrance.com
www.salice.com

SALICE ESPAÑA, S.L.U.

C/ AIGUAFREDA 4, P.I. AMETLLA PARK
08480 L'AMETLLA DEL VALLÈS (BARCELONA)
TEL. 0034 938 46 88 61
info.salice@saliceespana.es
www.salice.com

SALICE PORTUGAL UNIP. LDA

SHOWROOM:
TV SÁ E MELO 161 FA
4470-116 MAIA - PORTO
TEL: 00351 224 154 221
Info@saliceportugal.pt
www.salice.com
ARMAZÉM:
VIA ROTA DOS MÓVEIS I 399
4585-325 GANDRA

SALICE CHINA (SHANGHAI) CO. LTD.

RM 602, 6/F, TOWER 1,
3688 YINGGANG DONG ROAD
QINGPU DISTRICT
201703 SHANGHAI, CHINA
TEL. 021 3988-9880
info.salice@salicechina.com
www.salicechina.com

SALICE INDIA PVT. LTD.

1001 & 1002, 10TH FLOOR,
CENTRUM, PLOT NO. C-3,
OPP. WAGLE PRABHAG SAMITI OFFICE,
MIDC AREA, WAGLE INDUSTRIAL ESTATE,
THANE - 400604, MAHARASHTRA
TEL. 022 20812050
info@saliceindia.com
www.salice.com

SALICE CANADA INC.

3500 RIDGEWAY DRIVE,
UNIT#1
MISSISSAUGA, ONTARIO, L5L 0B4
TEL. 905 820 8787
FAX. 905 820 7226
info.salice@salicecanada.com
www.salicecanada.com

SALICE AMERICA INC.


2123 CROWN CENTRE DRIVE
CHARLOTTE NC. 28227
TEL. 704 841 7810
FAX. 704 841 7808
info.salice@saliceamerica.com
www.saliceamerica.com

ARTURO SALICE S.p.A.

HEAD OFFICE

VIA PROVINCIALE NOVEDRATESE, 10
22060 NOVEDRATE (COMO) ITALIA
TEL. 031 790424 - FAX 031 791508

info.salice@salice.com
www.salice.com



Digital contents



DOCASS001ENG Ed. 03 - 04/2025

* 5 2 2 9 C T 1 0 0 2 . 0 *