





Full-extension runner system fixed to the drawer by locating pin. The Push self-opening system for handle-less drawers is fully integrated into the runner. A slight pressure on the drawer frontal is sufficient for the drawer to self-open. The Smooth decelerated closing action is also fully integrated into the runner.

Product features


- Safety system that secures the drawer to the runner.
- Drawer height adjustment +3 mm and depth adjustment ± 2 mm.
- The drawer is maintained parallel with the cabinet side during opening.
- Drawer fixing without screws.
- Finish: bright zinc-plated.



Dimensions

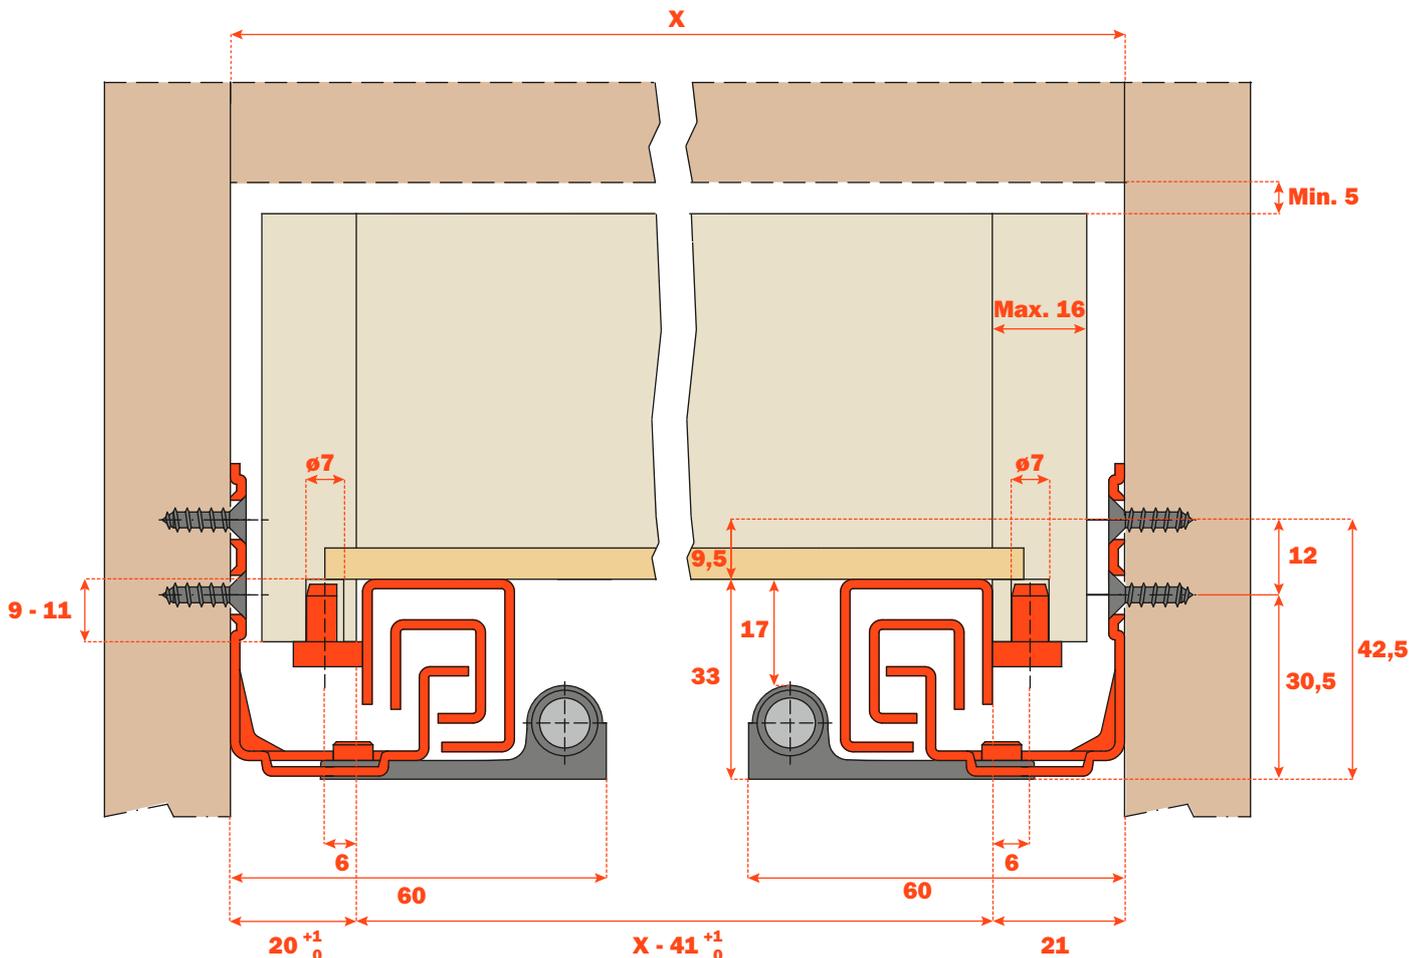

Part number




To be screw fixed
Screw TSP \varnothing 3,5 mm

BASIC PART NUMBER	RUNNER LENGTH (LN)	=	MIN. DEPTH OF THE CABINET (PM)
1 0 652 80 300 2 0 0	300		310
1 0 652 80 350 2 0 0	350		360
1 0 652 80 400 2 0 0	400		410
1 0 652 80 450 2 0 0	450		460
1 0 652 80 470 2 0 0	470		480
1 0 652 80 500 2 0 0	500		510


Fixing the drawer onto the runners

The flexibility of the system enables the locating pin to be engaged simply by placing the drawer onto the runners and closing it.

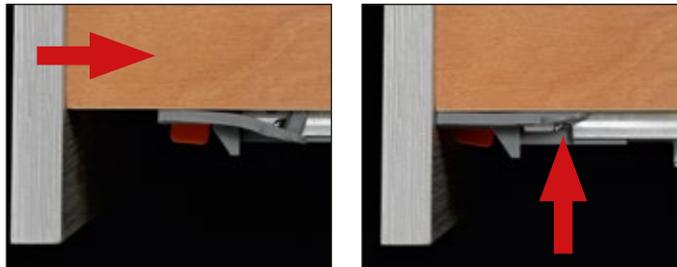

Detail of the pin-fix clip premounted on the runner, with:

- Tool free height and depth adjustment;
- Safety device to prevent the drawers from turning over;
- Locating pin.

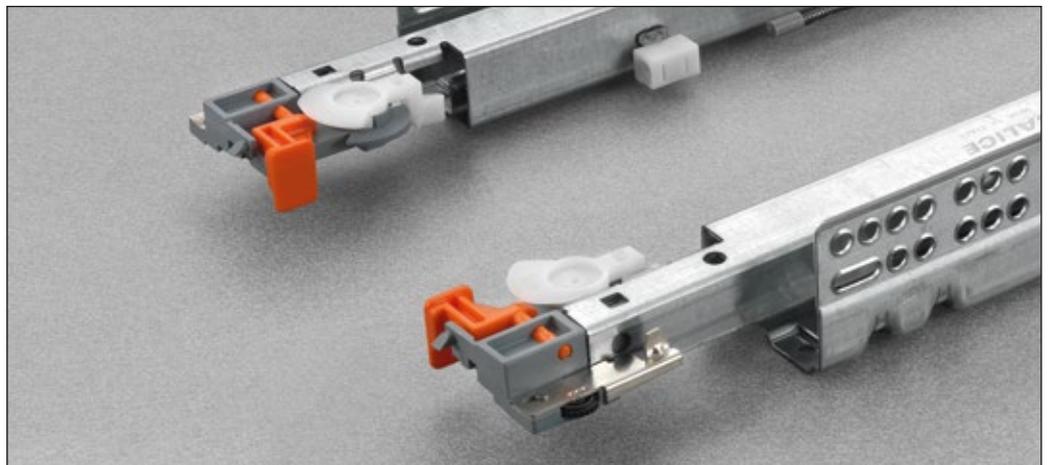

Detail of the integrated systems into the runner:

- Push, which allows the opening of handle-less drawers.
- Smove, which allows the decelerated closing of the drawers.

