


Accessories

Drilling templates for drawers - For all Progressa, Progressa⁺ and Progressa⁺ Shelf slides

Pre-drilling for the clips reduces the possibility of splitting the wood, thus assuring the correct and level installation of the clips.

The correct and level mounting assures a smooth assembly and operation of the drawer slide.

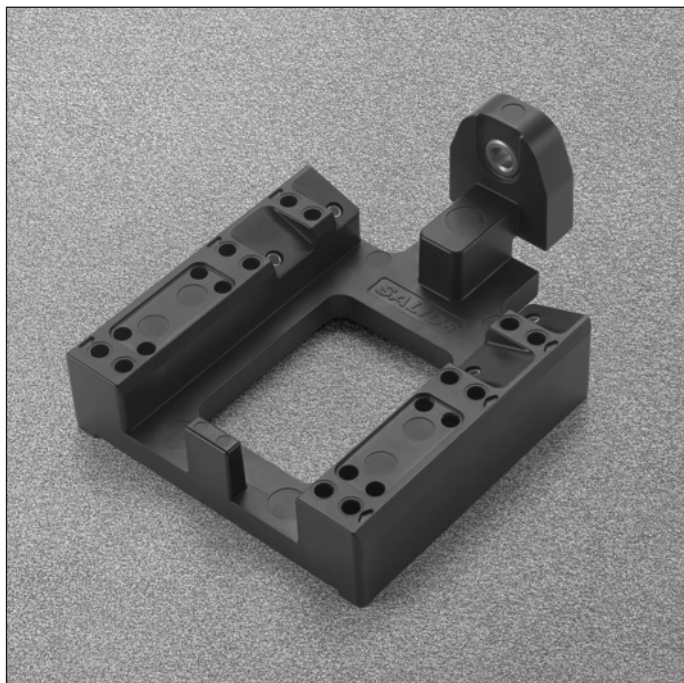

AFCGXX3B
(right and left)



AFCGX43B
(right and left)



AFCGX43B
(right and left)




ASGD704U3XA

PACKAGING


1 box = 1 pc.

Back drilling for hook



Pre-bore for rear hook for proper alignment and depth (min. depth = 10 mm or 13/32")

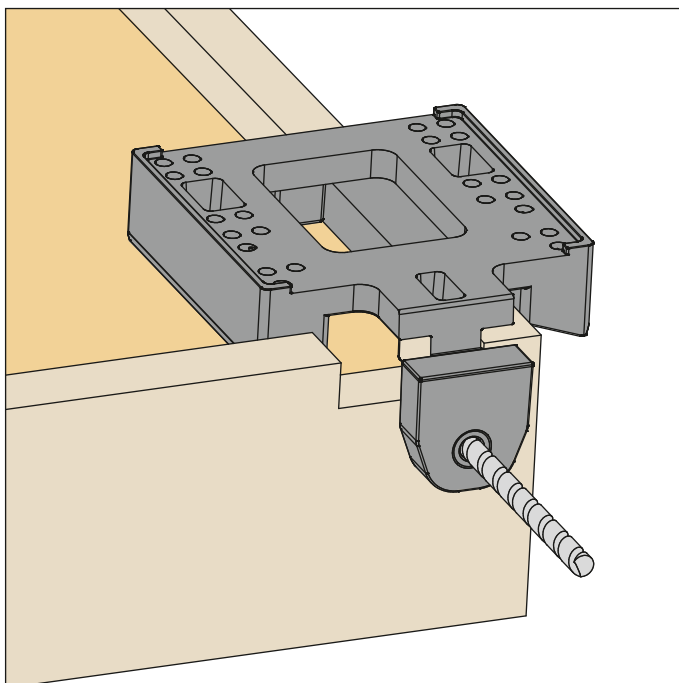

Use a \varnothing 6 mm (1/4") drill bit


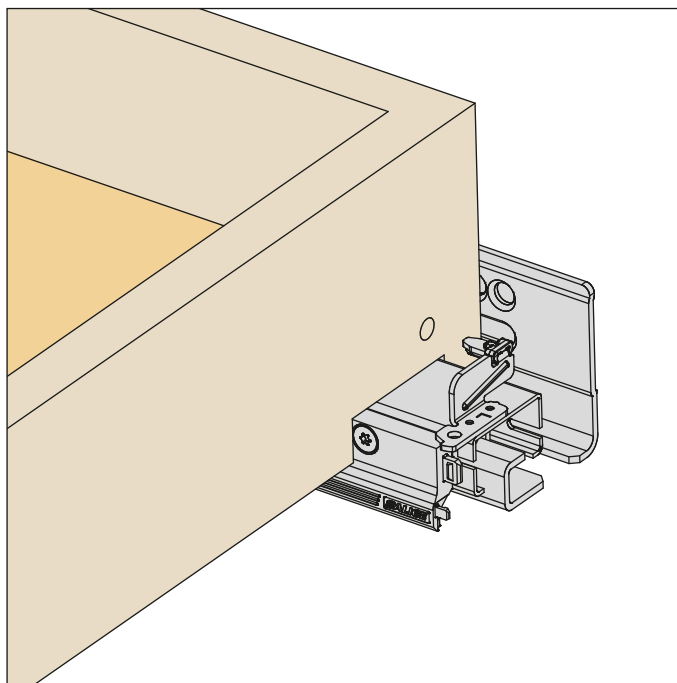


Angled drilling for clips, fixing on the sub-front

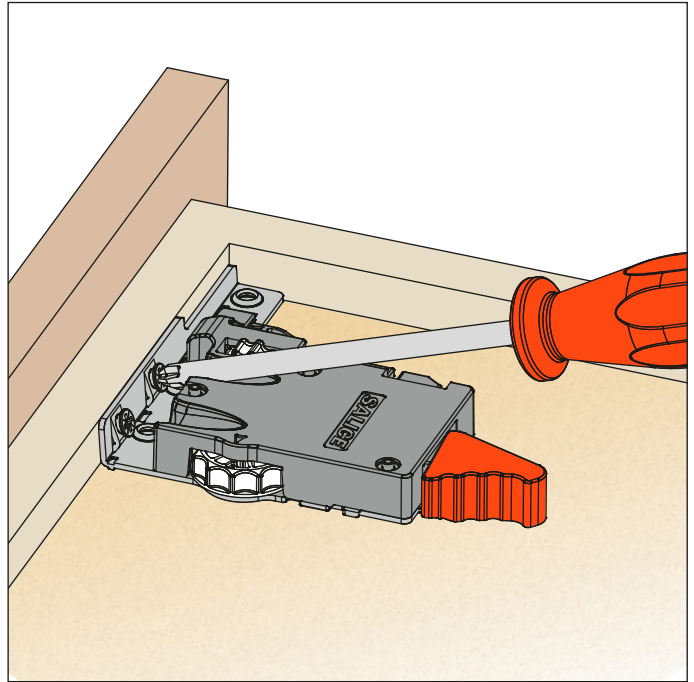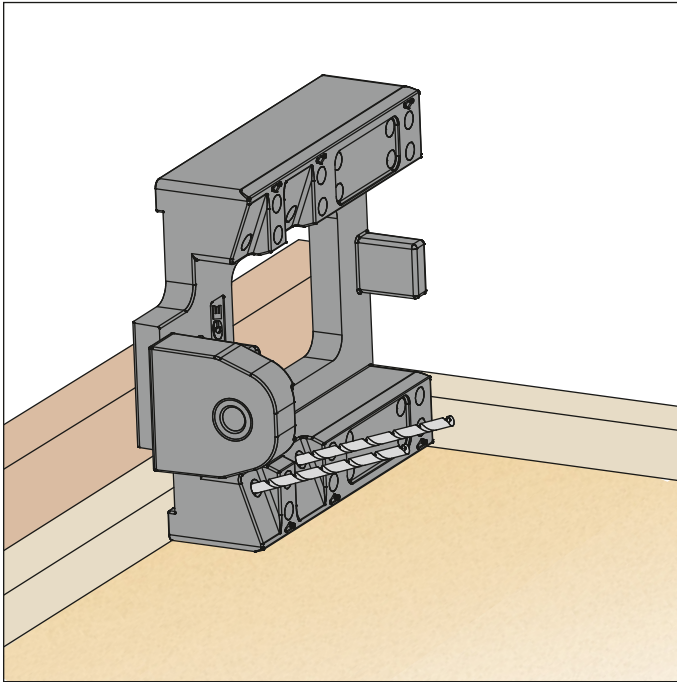

Use a \varnothing 2.5 mm (3/32") drill bit



Vertical drilling for clips, fixing on the bottom

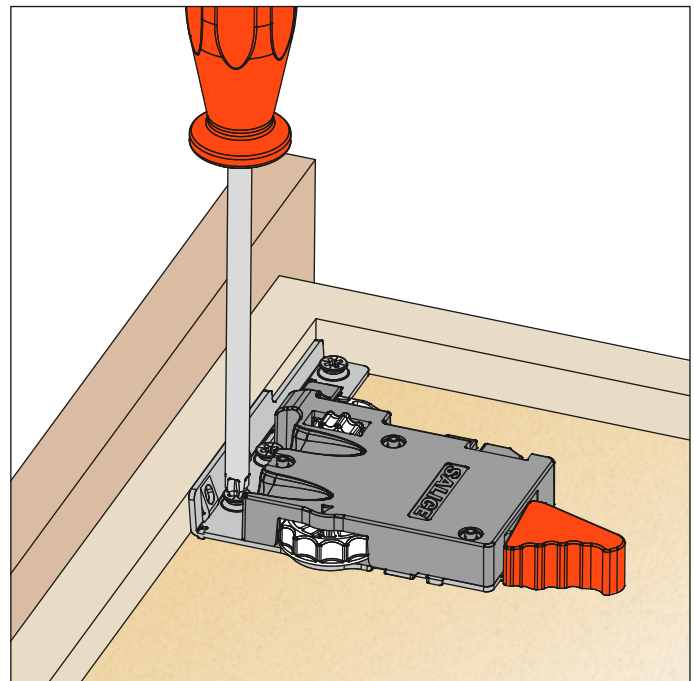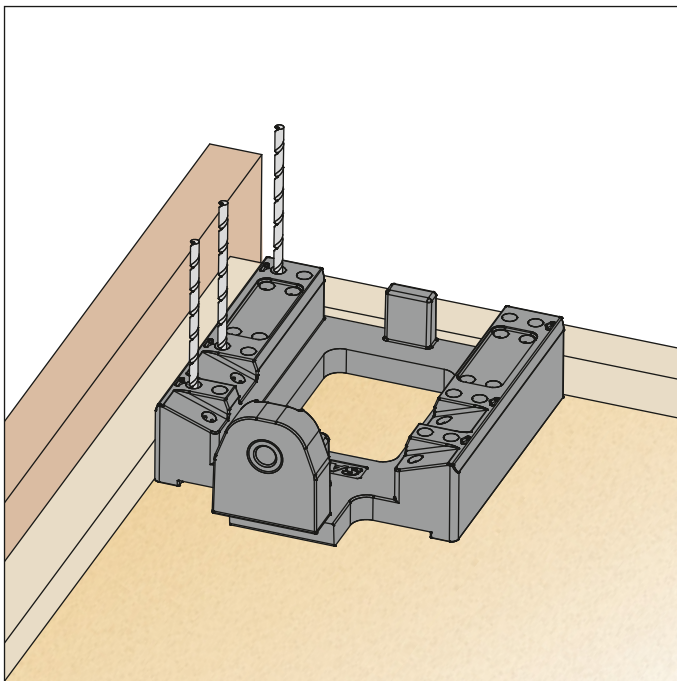


Use a \varnothing 2.5 mm (3/32") drill bit

Drilling templates for drawers

Fixing directly on drawer bottom

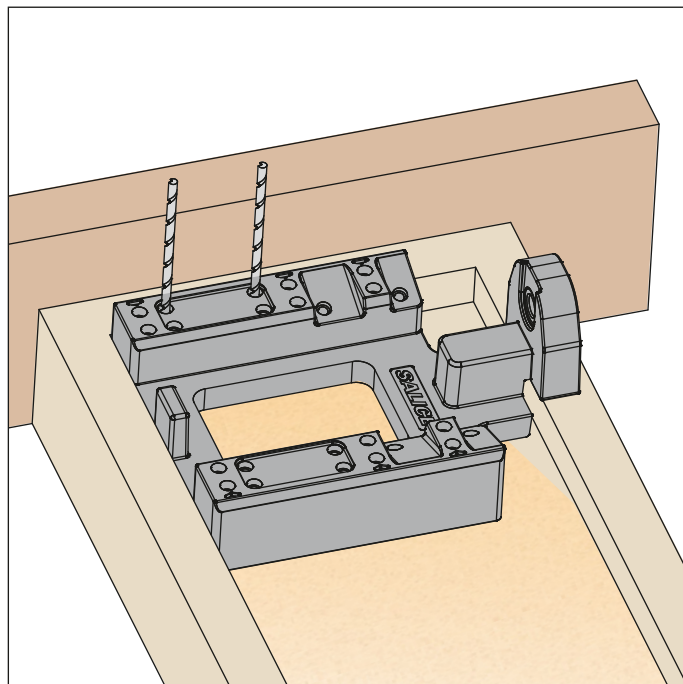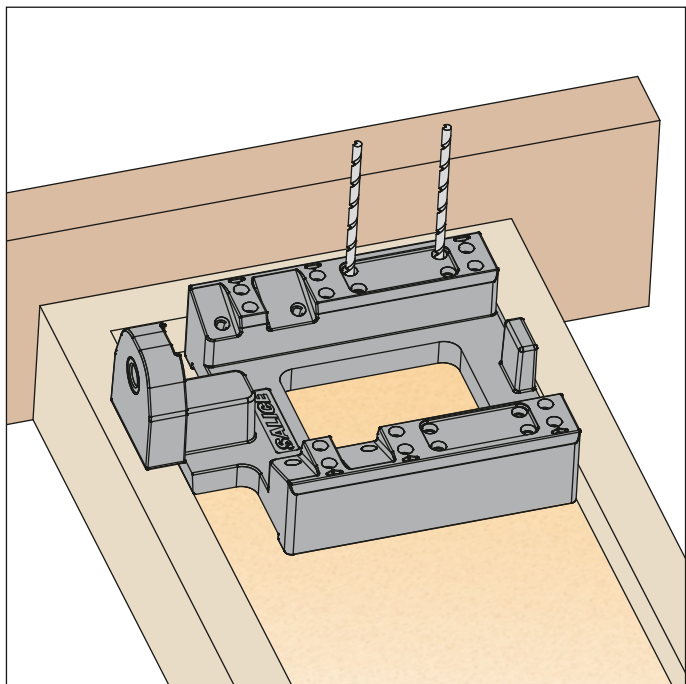


Use a \varnothing 2.5 mm (3/32") drill bit

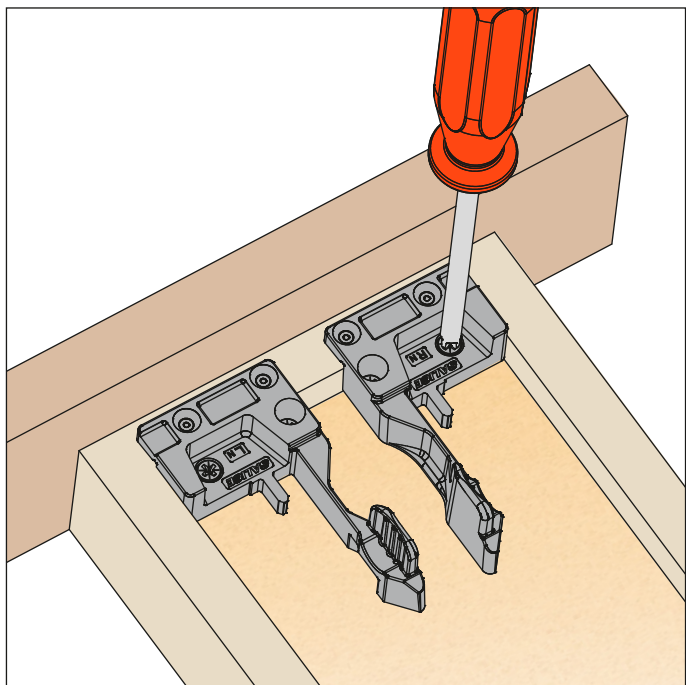

Drilling templates for drawers - For all Progressa, Progressa+ and Progressa+ Shelf slides

Pre-drilling for the clips reduces the possibility of splitting the wood, thus assuring the correct and level installation of the clips.
The correct and level mounting assures a smooth assembly and operation of the drawer slide.

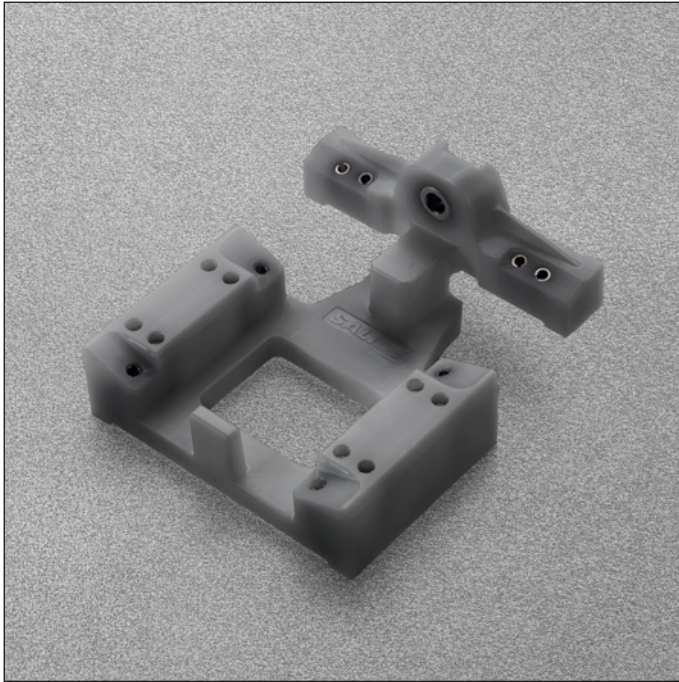

AFCEX56B
(right and left)





ASGD504U6XA

PACKAGING
1 box = 1 pc.

Back drilling for hook


Pre-bore for rear hook for proper alignment and depth (min. depth = 10 mm or 13/32")

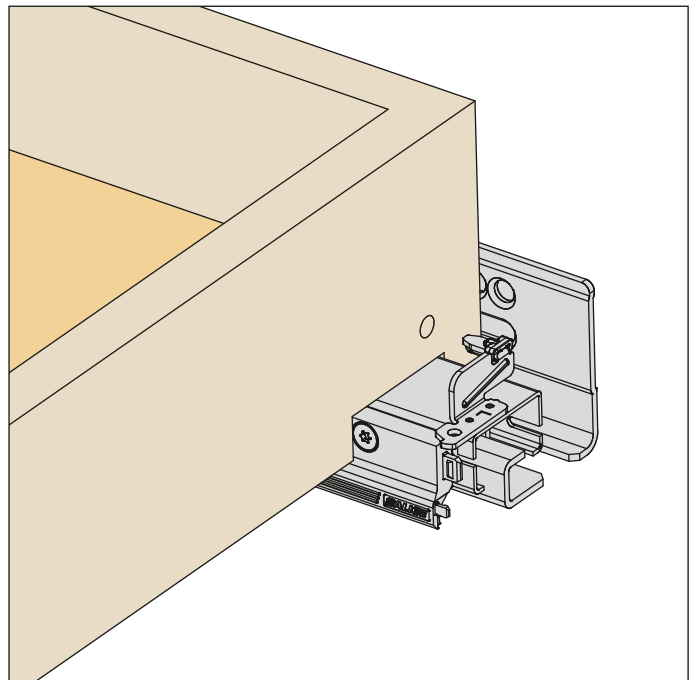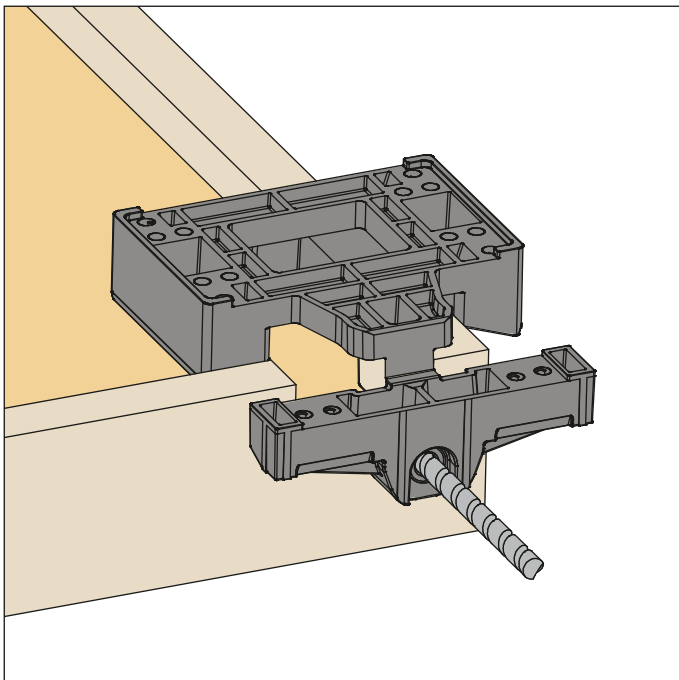


Use a \varnothing 6 mm (1/4") drill bit

Drilling templates for drawers

Fixing the clip on the drawer member

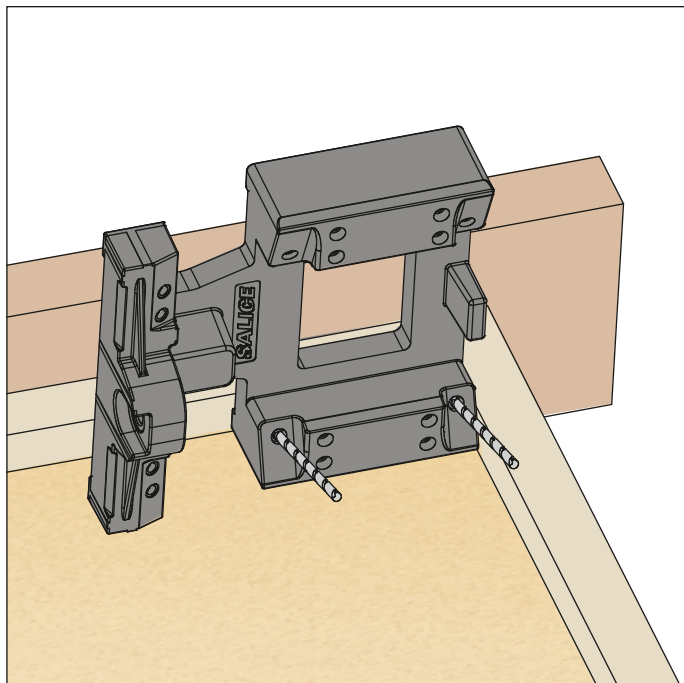


Use a \varnothing 2.5 mm (3/32") drill bit

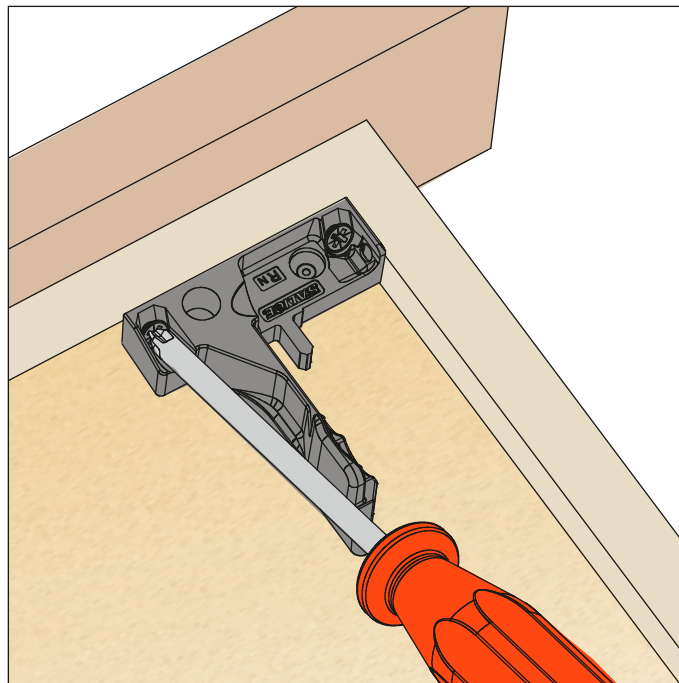


The use of 6 x 5/8" screws is recommended for a correct operation of the clips


Vertical drilling for clips, fixing on the bottom

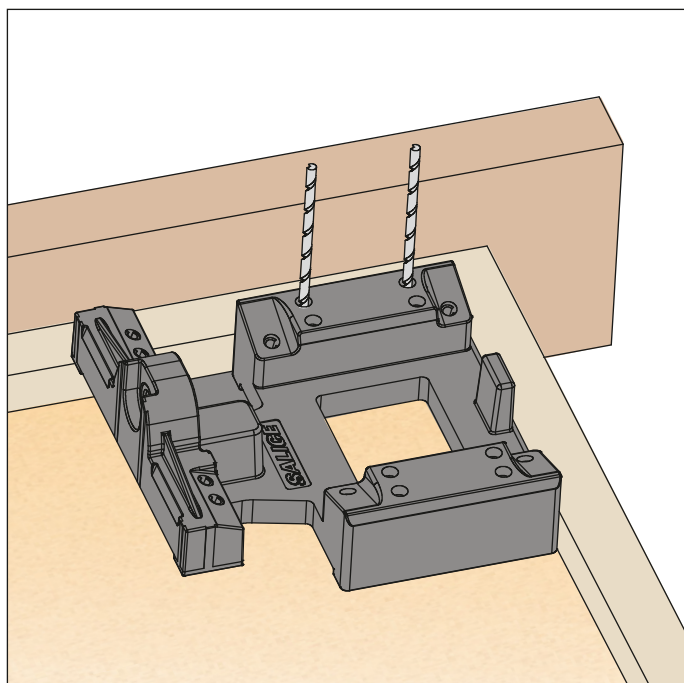


Use a \varnothing 2.5 mm (3/32") drill bit

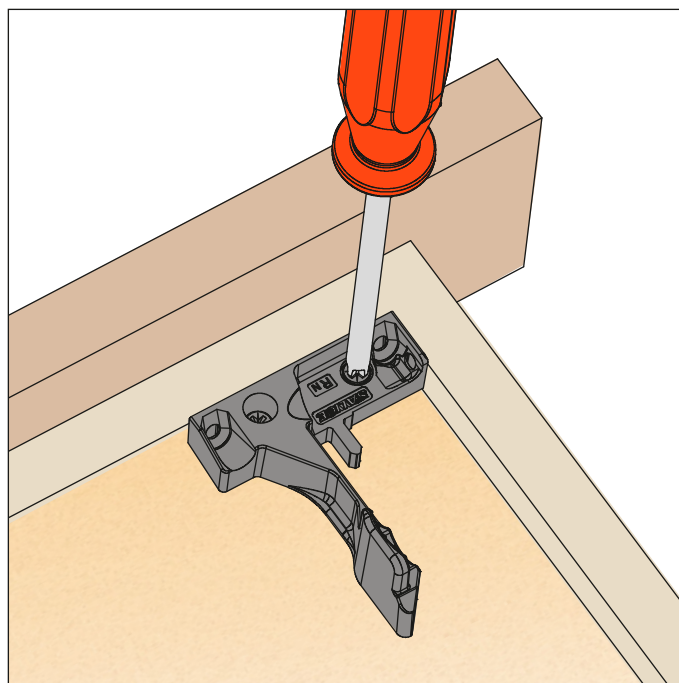

Optional lateral fixing

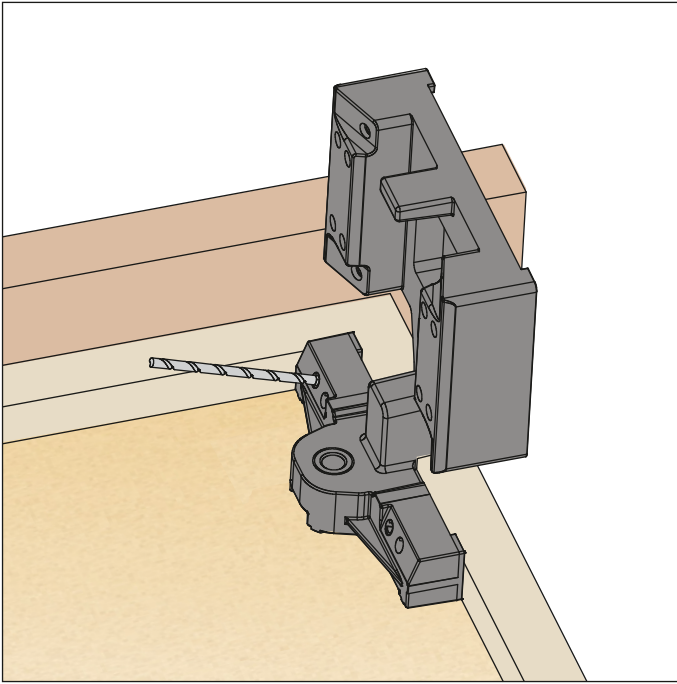

Use a \varnothing 2.5 mm (3/32") drill bit

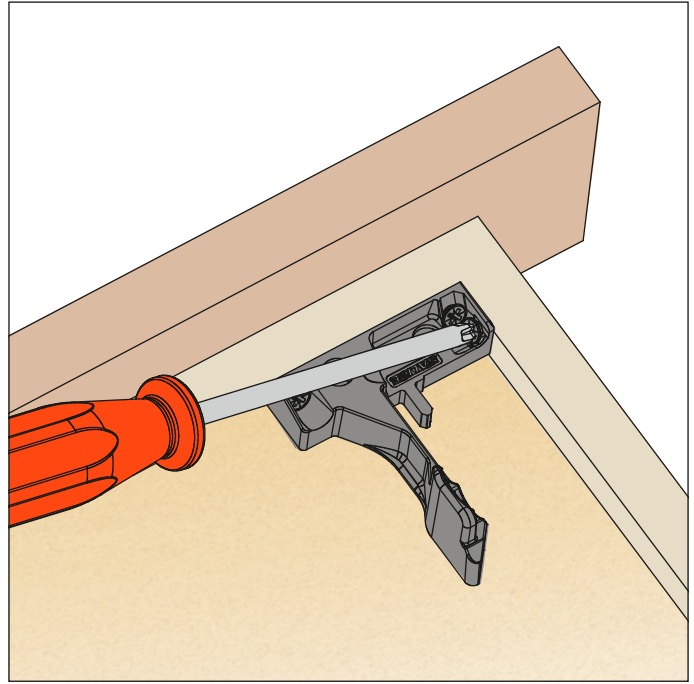

The use of 6 x 5/8" screws is recommended for a correct operation of the clips

Accessories - For Progressa+ Shelf slides

Rear-fixed bracket and magnet - Lock-open function for runners and drawers



AROSXXY


The shelf is held at the maximum opening position by means of a rear-fixed bracket and a magnet.

PACKAGING


1 box = 20 magnets, 20 brackets.
Screws included.

Assembly instructions


1 A) Fix the bracket, aligned with the back of the shelf.

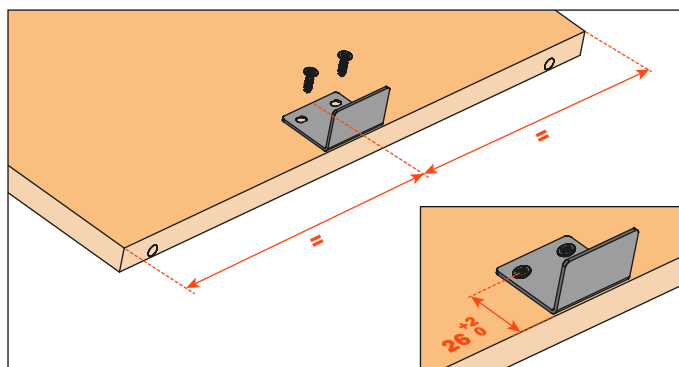


1 B) Fix the bracket to the shelf with the rear hook support. The bracket needs to be aligned to the rear hook support.

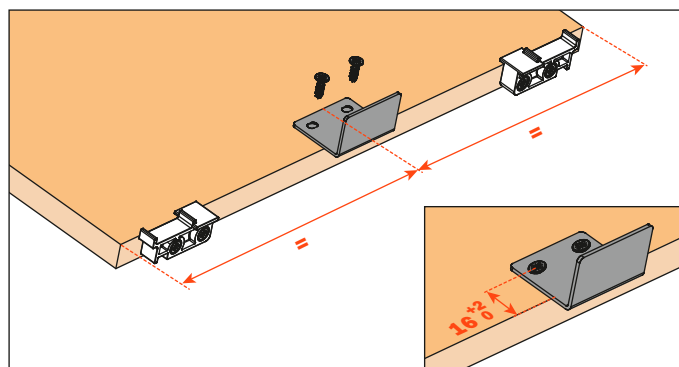



2) Fix the magnet to the bottom.

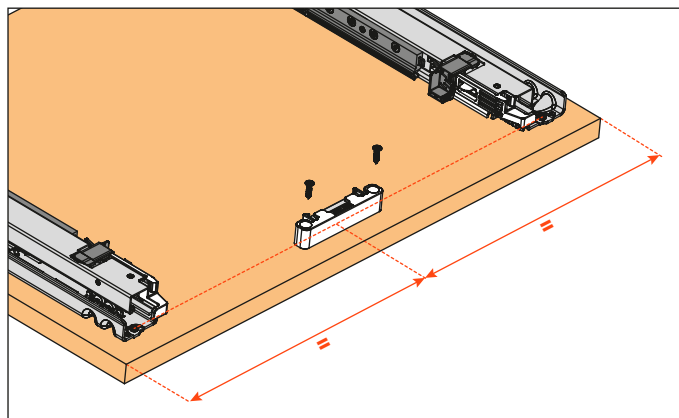

3) The shelf is held at the maximum opening position.

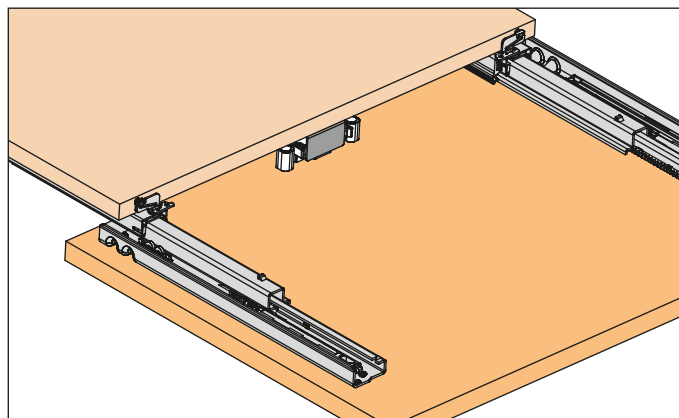

Rear hook bracket

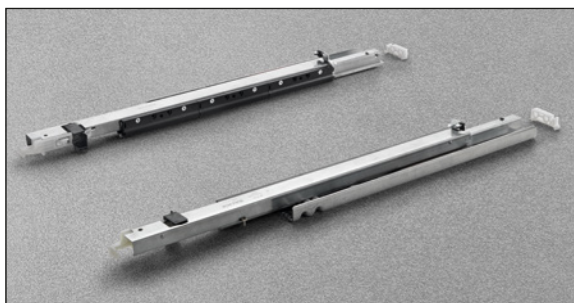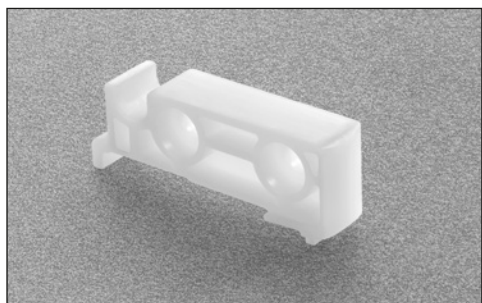

AGAPXXYI

For shelves that are less than 12 mm thick, the runner can be used together with the rear hook bracket, thus eliminating the need for the rear hole in the shelf.

PACKAGING:

1 box = 100 pcs

Accessories - For all Progressa, Progressa+ and Progressa+ Shelf slides

Wood screw




V234X164

Wood screw # 6 x 16 mm (5/8")

PACKAGING

1 box = 100 pcs

Euro screw




V136X114

Euro screw # 6 x 11 mm (7/16")

PACKAGING

1 box = 100 pcs



V136X154

Euro screw # 6 x 14.5 mm (9/16")

PACKAGING

1 box = 100 pcs

Pozi driver




D2A7XCXCP

PACKAGING

1 box = 100 pcs

Accessories - For all Progressa, Progressa+ and Progressa+ Shelf slides**Ø 6 mm drill bit for rear hook****TDB7406R**

PACKAGING 1 box = 1 pc.

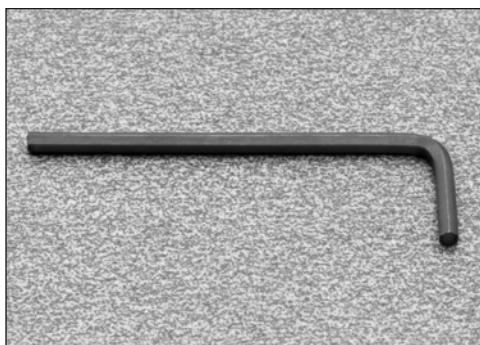Hex key to lock the stop collar set screw onto the 6 mm drill bit**TLKEY332**

PACKAGING 1 box = 1 pc.

Drill bit stop collar for 6 mm bit**TSC06MM**PACKAGING
1 box = 1 pc.